



R-32 High-Efficiency Gas/Electric Packaged Rooftop Unit DHG Commercial 7.5 - 12.5 Nominal Tons Up to 17.5 IEER / 12.5 EER



*Complete warranty details available from your local distributor or manufacturer's representative or at www.daikincomfort.com or www.daikinac.com



Our Perfect Package:

Harnessing energy-efficient performance, proven technology, and enhanced comfort for life.

Since becoming the first company in Japan to manufacture packaged air conditioning systems, in 1951, Daikin has supported comfortable indoor living based on the strengths and technologies that have led to the growth of the company becoming one of the world's largest manufacturers of HVAC products, systems and refrigerants.

Today, as a comprehensive global manufacturer of HVAC products and systems, the Daikin brand is committed to being recognized as a truly global and excellent company capable of continually creating new value for its customers. The company plans to pursue sustainable growth and foster business operations that consistently harmonize with the goals of improving indoor comfort.


The group philosophy of the company includes:

- » Creating new value continuously for customers
- » Developing world leading energy-saving technology
- » Being a flexible and dynamic organization
- » Allowing employees to be the driving force for the success of the company
- » Fostering an atmosphere of best practices, boldness, and innovation
- » Thinking and acting globally



Contents

2	Introduction	2
4	Nomenclature	4
5	Features and Benefits	5
	Applications	8
	Serviceability	8
9	Product Specifications	9
	Coil Dimension	18
	AHRI Ratings	18
	Sound Data	18
19	Dimensional Data	19
20	Expanding Cooling Data	20
28	Heating Data	28
29	Air Flow	29
77	DDC Airflow	77
92	Static Pressure	92
93	Electrical Data	93
96	Wiring Diagrams	96
102	Electrical Connections	102
	Unit Clearances	102
103	Installation	103
	Weights	103

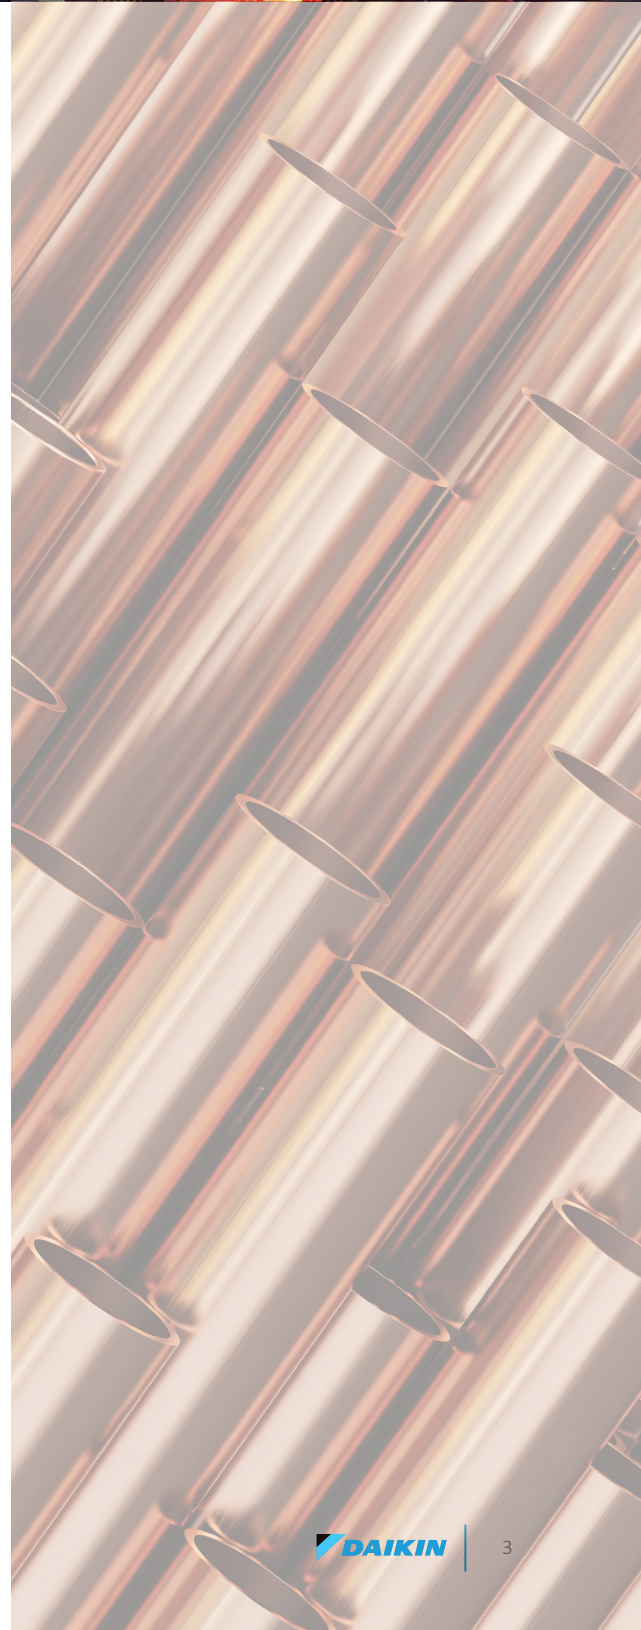

Nomenclature

	D	H	G	120	7	S	400	C	A	A	X	X	X	X	X	X	X	X	A	*																														
	1	2	3	4,5,6	7	8	9,10,11	12	13	14	15	16	17	18	19	20	21	22	23	24																														
Brand	D Daikin																																																	
Configuration	S R 32 Standard Efficiency H R 32 High Efficiency																																																	
Application	C Cooling G Gas Heat H Heat Pump																																																	
Nominal Cooling Capacity	036 3 Tons 102 8½ Tons 048 4 Tons 120 10 Tons 060 5 Tons 150 12½ tons 072 6 Tons 180 15 Tons 090 7½ Tons 240 20 Tons 300 25 Tons																																																	
Voltage	1 208-230/1/60 4 460/3/60 3 208-230/3/60 7 575/3/60																																																	
Supply Fan/Drive Type/Motor	D Direct Drive - Standard Static L Direct Drive -Medium Static W Direct Drive - High Static																																																	
Nominal Heating Capacity	<table border="1"> <thead> <tr> <th>AC Field and Factory-Installed Electric Heat</th> <th>Electric Heat w/ SCR controls</th> </tr> </thead> <tbody> <tr><td>045 45,000 BTU/h</td><td>240 240,000 BTU/h</td></tr> <tr><td>060 60,000 BTU/h</td><td>260 260,000 BTU/h</td></tr> <tr><td>070 70,000 BTU/h</td><td>350 350,000 BTU/h</td></tr> <tr><td>080 80,000 BTU/h</td><td>360 360,000 BTU/h</td></tr> <tr><td>090 90,000 BTU/h</td><td>400 400,000 BTU/h</td></tr> <tr><td>100 100,000 BTU/h</td><td>480 480,000 BTU/h</td></tr> <tr><td>115 115,000 BTU/h</td><td>505 5kW</td></tr> <tr><td>125 125,000 BTU/h</td><td>510 10 kW</td></tr> <tr><td>130 130,000 BTU/h</td><td>515 15 kW</td></tr> <tr><td>140 140,000 BTU/h</td><td>516 15 kW</td></tr> <tr><td>150 150,000 BTU/h</td><td>518 18 kW</td></tr> <tr><td>180 180,000 BTU/h</td><td>520 20 kW</td></tr> <tr><td>210 210,000 BTU/h</td><td>545 45 kW</td></tr> <tr><td>225 225,000 BTU/h</td><td>546 45 kW</td></tr> </tbody> </table>																				AC Field and Factory-Installed Electric Heat	Electric Heat w/ SCR controls	045 45,000 BTU/h	240 240,000 BTU/h	060 60,000 BTU/h	260 260,000 BTU/h	070 70,000 BTU/h	350 350,000 BTU/h	080 80,000 BTU/h	360 360,000 BTU/h	090 90,000 BTU/h	400 400,000 BTU/h	100 100,000 BTU/h	480 480,000 BTU/h	115 115,000 BTU/h	505 5kW	125 125,000 BTU/h	510 10 kW	130 130,000 BTU/h	515 15 kW	140 140,000 BTU/h	516 15 kW	150 150,000 BTU/h	518 18 kW	180 180,000 BTU/h	520 20 kW	210 210,000 BTU/h	545 45 kW	225 225,000 BTU/h	546 45 kW
AC Field and Factory-Installed Electric Heat	Electric Heat w/ SCR controls																																																	
045 45,000 BTU/h	240 240,000 BTU/h																																																	
060 60,000 BTU/h	260 260,000 BTU/h																																																	
070 70,000 BTU/h	350 350,000 BTU/h																																																	
080 80,000 BTU/h	360 360,000 BTU/h																																																	
090 90,000 BTU/h	400 400,000 BTU/h																																																	
100 100,000 BTU/h	480 480,000 BTU/h																																																	
115 115,000 BTU/h	505 5kW																																																	
125 125,000 BTU/h	510 10 kW																																																	
130 130,000 BTU/h	515 15 kW																																																	
140 140,000 BTU/h	516 15 kW																																																	
150 150,000 BTU/h	518 18 kW																																																	
180 180,000 BTU/h	520 20 kW																																																	
210 210,000 BTU/h	545 45 kW																																																	
225 225,000 BTU/h	546 45 kW																																																	
Refrigeration Systems	A Single stage cooling modes C Two stage cooling modes F Two stage cooling modes with Hot Gas Reheat and Low-ambient control G Single stage cooling mode with Low-ambient controller H Two stage cooling mode with Low-ambient controller																																																	
Heat Exchanger	X No options A Standard Aluminized Exchanger S Stainless Steel Exchanger U Ultra Low Nox																																																	
Controls	A Electromechanical controls C DDC w/ BACnet™ interface																																																	
Revision Levels	Major & Minor																																																	
ERW, PE Connection	X No Options B Single-point power connection for Power Exhaust																																																	
IAQ	X No Options																																																	
Service Options	X No Options A Powered convenience outlet B Non-powered convenience outlet C Hinge Panels D Hinged Panels and Powered convenience outlet E Hinged Panels and non-powered convenience outlet																																																	
Electrical	X No Options A Non-Fused Disconnect B Phase Monitor C Thru-the-base connections E Non-Fused Disconnect and Phase Monitor F Non-Fused Disconnect and Thru-the-base connectons H Phase Monitor and Thru-the-base connections L Non-Fused Disconnect, Thru-the-base connectons and Phase Monitor																																																	
Economizer	X No Options A Ultra Low-Leak Downflow Economizer w/ Enthalpy Sensor C Ultra Low-Leak Internal Horizontal Economizer w/ Enthalpy Sensor E Ultra Low-Leak Downflow Economizer for DDC controls w/ Enthalpy Sensor F Ultra Low-Leak Horizontal Economizer for DDC controls w/ Enthalpy Sensor G Ultra Low-Leak Downflow Economizer w/ Dry Bulb Sensor J Ultra Low-Leak Internal Horizontal Economizer w/ Dry Bulb Sensor L Ultra Low-Leak Downflow Economizer for DDC controls w/ Dry Bulb Sensor M Ultra Low-Leak Horizontal Economizer for DDC controls w/ Dry Bulb Sensor																																																	
Coils, Hail guard	X No Options C Hail Guard																																																	
Sensors	D R32 Sensor E RA Smoke Detector F SA Smoke Detector G RA & SA Smoke Detector																																																	

See product specifications for heat size(s) available for each capacity.

AC Stocking Models					
Daikin 7.5-12.5 Ton					
MODEL NUMBER	CODE STRING	MODEL NUMBER	CODE STRING	MODEL NUMBER	CODE STRING
DHG0903DH00001S	DHG0903D225CAADXXXXXXXXAA	DHG1027DH00001S	DHG1027D225CAADXXXXXXXXAA	DHG1504DH00001S	DHG1504D240CAADXXXXXXXXAA
DHG0903DL00001S	DHG0903D130CAADXXXXXXXXAA	DHG1027DL00001S	DHG1027D130CAADXXXXXXXXAA	DHG1504DL00001S	DHG1504D130CAADXXXXXXXXAA
DHG0903DM00001S	DHG0903D180CAADXXXXXXXXAA	DHG1027DM00001S	DHG1027D180CAADXXXXXXXXAA	DHG1504DM00001S	DHG1504D180CAADXXXXXXXXAA
DHG0904DH00001S	DHG0904D225CAADXXXXXXXXAA	DHG1203DH00001S	DHG1203D240CAADXXXXXXXXAA	DHG1507DH00001S	DHG1507D240CAADXXXXXXXXAA
DHG0904DL00001S	DHG0904D130CAADXXXXXXXXAA	DHG1203DL00001S	DHG1203D130CAADXXXXXXXXAA	DHG1507DL00001S	DHG1507D130CAADXXXXXXXXAA
DHG0904DM00001S	DHG0904D180CAADXXXXXXXXAA	DHG1203DM00001S	DHG1203D180CAADXXXXXXXXAA	DHG1507DM00001S	DHG1507D180CAADXXXXXXXXAA
DHG0907DH00001S	DHG0907D225CAADXXXXXXXXAA	DHG1204DH00001S	DHG1204D240CAADXXXXXXXXAA	DHG1507WH00001F	DHG1507W240CAADXXXXXXXXAA
DHG0907DL00001S	DHG0907D130CAADXXXXXXXXAA	DHG1204DL00001S	DHG1204D130CAADXXXXXXXXAA	DHG1503WL00001F	DHG1503W130CAADXXXXXXXXAA
DHG0907DM00001S	DHG0907D180CAADXXXXXXXXAA	DHG1204DM00001S	DHG1204D180CAADXXXXXXXXAA	DHG1503WM00001F	DHG1503W180CAADXXXXXXXXAA
DHG1023DH00001S	DHG1023D225CAADXXXXXXXXAA	DHG1207DH00001S	DHG1207D240CAADXXXXXXXXAA	DHG1504WH00001F	DHG1504W240CAADXXXXXXXXAA
DHG1023DL00001S	DHG1023D130CAADXXXXXXXXAA	DHG1207DL00001S	DHG1207D130CAADXXXXXXXXAA	DHG1504WL00001F	DHG1504W130CAADXXXXXXXXAA
DHG1023DM00001S	DHG1023D180CAADXXXXXXXXAA	DHG1207DM00001S	DHG1207D180CAADXXXXXXXXAA	DHG1504WM00001F	DHG1504W180CAADXXXXXXXXAA
DHG1024DH00001S	DHG1024D225CAADXXXXXXXXAA	DHG1503DH00001S	DHG1503D240CAADXXXXXXXXAA	DHG1507WH00001F	DHG1507W240CAADXXXXXXXXAA
DHG1024DL00001S	DHG1024D130CAADXXXXXXXXAA	DHG1503DL00001S	DHG1503D130CAADXXXXXXXXAA	DHG1507WL00001F	DHG1507W130CAADXXXXXXXXAA
DHG1024DM00001S	DHG1024D180CAADXXXXXXXXAA	DHG1503DM00001S	DHG1503D180CAADXXXXXXXXAA	DHG1507WM00001F	DHG1507W180CAADXXXXXXXXAA

Daikin Packaged Rooftop Units (RTUs) are built to perform, with features and options that help provide low installation and operation costs, superior indoor air quality, efficient operation, and longevity.

Installation

Daikin Packaged units are designed with fast and easy installation in mind and are ideal for both new construction and retrofit projects. Our packaged rooftop units are built to be a direct replacement for most rooftop units on the field without the need of a curb adapter, to be able to replace the unit in a shorter time and at a lower cost (compared to the previous design).

Cabinet Construction

Daikin packaged rooftop units are made with high quality galvanized steel with a powder-paint finish to provide higher corrosion resistance.

- » Easy accessibility using our tool-less filter access
- » The interior surface in the indoor air section is fully insulated to prevent sweating and thermal losses, using our foil face fiberglass insulation which also omits exposed filter fibers into the airstream.
- » 1" Raised flanged edges around the supply and return offer easy installation for the duct connections.

- » The full perimeter base rail is built using heavy gauge galvanized steel for a stronger structural installation. The base rails are a minimum of 3½" tall and include holes to allow for overhead rigging and lifting with forklifts.
- » Electrical lines and gas lines can be brought through the base of the unit or through the horizontal knockout for easy installation and accessibility on the field.

Compressor

High performance, low noise scroll compressors to match the required total load.

- » Resiliently factory-mounted on rubber grommets for vibration isolation
- » Refrigeration circuit includes both low- and high-pressure transducer, high pressure safety switch and temperature sensors for the suction and discharge lines.
- » Unit is factory charged with environmentally friendly Low GWP R-32 refrigerant.
- » Compressor location outside the condenser section to avoid air bypass.
- » Internal overload protection included with compressor.
- » Dual single-stage scroll compressor for partial load applications.

Supply Fan

The direct-drive with airfoil single width, single inlet (SWSI) Class II construction supply fan with aluminum fan +blades provides efficient and quiet operation at wide ranging static pressure and air flow requirements.

- » Fan wheel is continuously welded to the hub plate and end rim for long lasting reliable operation.
- » Direct-drive ECM motor removes the need for belts, sheaves, or bearings and its permanently lubricated motors provides low maintenance cost.
- » Each fan assembly is dynamically trim balanced at the factory before shipment for quick start-up and efficient operation.
- » Electromechanical integrated controls modulate the supply fan motor
- » Motor with thermal overload is provided for motor long lasting operation.

Coils

All units use large face area outdoor coils. These coils are constructed with seamless copper tubes, mechanically bonded into aluminum plate-type fins with full drawn collars to completely cover the tubes for high operating efficiencies.

The indoor coil section is installed in a draw through configuration to provide better dehumidification.



Features and Benefits

- » Coils are factory pressure tested to ensure pressure and leak integrity.
- » Copper tube / aluminum fin coils on condenser and evaporator
- » 5mm Smart Coil Technology on all condenser coils for improved performance and reduced refrigerant load.

Controls and Wiring

Packaged rooftop units come equipped with a well-organized, large, easy to use, weatherproof internal control box with easy access, for a better user experience.

- » Units are factory-wired with labeled color-coded wires and complete 24-volt Electromechanical controls package.
- » Terminal blocks are provided as standard for easy installation and field power wiring.
- » The Daikin iLINQ Controller is a factory-installed solution to provide intelligent control for Daikin Light Commercial rooftop units* (RTUs). iLINQ provides physical inputs and outputs to control and monitor the RTU and features a graphic web interface for remote access (via a computer or tablet). Equipped with built-in BACnet™ IP and MS/TP interface or it can be used with an optional LonWorks® card that is available to integrate the Daikin RTU with building automation systems (BMS).

Filtration

Unit provides a draw-through filter section as standard for better air quality and long lasting component maintenance.

- » Filters installed on the units are standard off the shelf sizes for easy replacement.
- » One size filter per unit for low maintenance cost and easy replacement.
- » Tool-less filter access for easy and fast filter replacement and service.

Heating Section

Wide range of natural gas selections effectively handle most comfort heating demand from morning warm-up control to full heat, all available with Daikin's Wrinkle Bend heat exchanger technology.

Gas Furnace

ETL certified heating modules provide a custom match to specific design requirement.

- » Wrinkle Bend Technology available on all Daikin gas heat exchangers. The Wrinkle Bend Technology reduces the manufacturing stress that leads to defects and pinholes in the tubes at the same time as it increases the gas turbulence to amplify the heat transfer.
- » All 3-Phase models have a minimum 80% T.E. (Thermal Efficiency)
- » User has the flexibility to order heat exchanger tubes with 20 Gauge, G160, aluminized steel or stainless steel to meet your application needs.
- » The furnace has a tubular design with in-shot gas burner manifold and is installed downstream of the supply fan.

- » The module contains an induced draft fan that will maintain a negative pressure in the heat exchanger tubes for the removal of the flue gases to protect indoor air quality.
- » Each burner module provides flame roll-out safety protection switches and a high temperature limit switch for reliable operation.
- » Induced draft fan includes an airflow safety switch to prevent heating operation in the event of no airflow for occupant safety.
- » All burner assemblies are factory tested and adjusted prior to shipment.
- » Heating control is fully integrated into the unit's control system for quick start-up and reliable control.
- » Optional field installed LP kits are available for staged heating modules as well as high altitude kits.

Electrical

Units are completely wired and tested at the factory to provide faster commissioning and start-up.

- » Wiring complies with NEC requirements and all applicable UL standards.
- » For ease of use, wiring and electrical components are number coded and labeled according to the electrical diagram.
- » A 115 V GFI convenience outlet requiring independent power supply for the receptacle is optional.
- » An optional unit powered 20 amp 115 V convenience outlet, complete with factory mounted transformer, disconnect switch, and primary and secondary overload protection, eliminates the need to pull a separate 115 V power source.
- » Supply air fan, compressor, and condenser fan motor branch circuits have individual short circuit protection. Unit includes knockouts in the bottom of the main control panels for field wiring entrance.
- » A single-point power connection with power block is standard and a terminal board is provided for connecting low voltage control wiring.
- » For better serviceability an optional non-fused disconnect switch can be installed inside the control panel and operated by an externally mounted handle to disconnect the electrical power at the unit.

Daikin Modulating Hot Gas Reheat Dehumidification

Using a space sensor in conjunction with the Daikin iLINQ Controller and Reheat Module, the unit can initiate a Dehumidification Mode as the space humidity rises above setpoint. In this mode, the modulating valve diverts a percentage of the hot gas to the reheat coil as required in order to maintain supply air temperature requirements while lowering the space relative humidity. The modulating valve system allows smooth transition into dehumidification and longer run time at a steady supply air temperature. The indoor fan will operate at high and low speed during dehumidification mode.



Applications

Daikin Rooftop units are intended for comfort cooling applications in normal heating, ventilating, and air conditioning. Consult your local Daikin sales representative for applications involving operations at high ambient temperatures, high altitudes, non-cataloged voltages, or for job-specific unit selections that fall outside of the range of the catalog tables.

For proper operation, units should be rigged in accordance with instructions stated on the installation manual. Fire dampers, if required, must be installed in the ductwork according to local and/or state codes. No space is allowed for these dampers in the unit.

Follow factory check, test and start procedures explicitly to achieve satisfactory start-up and operation.

Most rooftop applications take advantage of the significant energy savings provided with economizer operation. When an economizer system is used, mechanical refrigeration is typically not required below an ambient temperature of 50°F.

Serviceability

Daikin packaged rooftop units are built with serviceability in mind, designed to make future maintenance and service on the unit easy and accessible.

- » Our packaged rooftop units offer a slide out blower to facilitate the access and removal of the fan.
- » Filter panels on the small chassis line offer tool-less access for easy maintenance.
- » Independent compressor outside of the air bypass to eliminate component blockage and provide easy access.
- » Labeled field connections, color coded and continuously marked wire to identify point-to-point component connections.
- » All 7.5- 12.5 ton units are designed for convertible airflow orientation to serve downflow or horizontal applications. Every unit ships prepared to convert to horizontal orientation in the field if required.
- » Condenser clean out from inside-out.
- » Easy access to gas valves and control panel.



Model	DHG0903DL000001S	DHG0903DM000001S	DHG0903DH000001S	DHG0904DL000001S	DHG0904DM000001S
COOLING CAPACITY					
Total, BTU/h	90,000	90,000	90,000	90,000	90,000
IEER / EER	17.5/12.5	17.5/12.5	17.5/12.5	17.5/12.5	17.5/12.5
AHRI Reference #					
HEATING CAPACITY					
Heat Range	LOW	MEDIUM	HIGH	LOW	MEDIUM
No. of Burners	5	6	7	5	6
High Stage Input / Output (KBTU/H)	130/105.3	180/145.8	225/182.25	130/105.3	180/145.8
Low Stage Input / Output (KBTU/H)	97.5/79	135/109.35	168.75/136.69	97.5/79	135/109.35
Thermal Efficiency (T.E.)	81%	81%	81%	81%	81%
Annual Fuel Utilization Efficiency (AFUE)	N/A	N/A	N/A	N/A	N/A
High Stage Temperature Rise Range (°F)	25 - 55	25 - 55	40 - 70	25 - 55	25 - 55
Low Stage Temperature Rise Range (°F)	25 - 55	25 - 55	40 - 70	25 - 55	25 - 55
EVAPORATOR MOTOR COIL					
Motor Type	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE
External Static Pressure (ESP)	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD
Wheel Dia. X Width	Ø15.12 X 12.62	Ø15.12 X 12.62	Ø15.12 X 12.62	Ø15.12 X 12.62	Ø15.12 X 12.62
Indoor Nominal CFM	3000	3000	3000	3000	3000
RPM	300-1600	300-1600	300-1600	300-1600	300-1600
Indoor Horsepower	2.4	2.4	2.4	2.4	2.4
Filter Size (in)	16 X 25 X 2 (4)	16 X 25 X 2 (4)	16 X 25 X 2 (4)	16 X 25 X 2 (4)	16 X 25 X 2 (4)
Drain Size (NPT)	3/4	3/4	3/4	3/4	3/4
R32 Refrigerant Charge (oz.)	122.4/115	122.4/115	122.4/115	122.4/115	122.4/115
Evaporator Coil Face Area (ft ²)	12.8	12.8	12.8	12.8	12.8
Rows Deep/ Fins per Inch	4/16	4/16	4/16	4/16	4/16
CONDENSER FAN/COIL					
Quantity of Condenser Fan Motors	2	2	2	2	2
RPM (High/Low stage)	1122	1122	1122	1050	1050
Outdoor Horsepower	1/3	1/3	1/3	1/3	1/3
Fan Diameter/ # Fan Blades	22/3	22/3	22/3	22/3	22/3
Face Area (ft ²)	35.3	35.3	35.3	35.3	35.3
Rows Deep / Fins per Inch	2/28±1	2/28±1	2/28±1	2/28±1	2/28±1
COMPRESSOR					
Quantity / Type / Stages	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1
Compressor RLA / LRA	12.2/120	12.2/120	12.2/120	5.8/55.1	5.8/55.1
ELECTRICAL DATA					
Voltage-Phase-Frequency	208/230-3-60	208/230-3-60	208/230-3-60	460-3-60	460-3-60
Indoor Blower FLA	8	8	8	5.4	5.4
Max External Static (In. W.C.)	0.8	0.8	0.8	0.8	0.8
Outdoor Fan FLA	2	2	2	0.85	0.85
Min. Circuit Ampacity ¹	39.4/39.4	39.4/39.4	39.4/39.4	20.1	20.1
Max. Overcurrent Protection (A) ²	50/50	50/50	50/50	25	25
Power Supply Conduit Hole Dia. (in)	1.375	1.375	1.375	1.375	1.375
Low-Voltage Conduit Hole Dia. (in)	0.875	0.875	0.875	0.875	0.875
OPERATING WEIGHT (LBS.)					
Operating Weight (lbs)	1253	1253	1253	1253	1253
SHIPPING WEIGHT (LBS.)					
Ship Weight (lbs)	1319	1319	1319	1319	1319

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² May use fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

Model	DHG0904DH00001S	DHG0907DL00001S	DHG0907DM00001S	DHG0907DH00001S
COOLING CAPACITY				
Total, BTU/h	90,000	90,000	90,000	90,000
IEER / EER	17.5/12.5	17.5/12.5	17.5/12.5	17.5/12.5
AHRI Reference #				
HEATING CAPACITY				
Heat Range	HIGH	LOW	MEDIUM	HIGH
No. of Burners	7	5	6	7
High Stage Input / Output (KBTU/H)	225/182.25	130/105.3	180/145.8	225/182.25
Low Stage Input / Output (KBTU/H)	168.75/136.69	97.5/79	135/109.35	168.75/136.69
Thermal Efficiency (T.E.)	81%	81%	81%	81%
Annual Fuel Utilization Efficiency (AFUE)	N/A	N/A	N/A	N/A
High Stage Temperature Rise Range (°F)	40 - 70	25 - 55	25 - 55	40 - 70
Low Stage Temperature Rise Range (°F)	40 - 70	25 - 55	25 - 55	40 - 70
EVAPORATOR MOTOR COIL				
Motor Type	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE
External Static Pressure (ESP)	STANDARD	STANDARD	STANDARD	STANDARD
Wheel Dia. X Width	Ø15.12 X 12.62	Ø15.12 X 12.62	Ø15.12 X 12.62	Ø15.12 X 12.62
Indoor Nominal CFM	3000	3000	3000	3000
RPM	300-1600	300-1600	300-1600	300-1600
Indoor Horsepower	2.4	2.4	2.4	2.4
Filter Size (in)	16 X 25 X 2 (4)	16 X 25 X 2 (4)	16 X 25 X 2 (4)	16 X 25 X 2 (4)
Drain Size (NPT)	3/4	3/4	3/4	3/4
R32 Refrigerant Charge (oz.)	122.4/115	122.4/115	122.4/115	122.4/115
Evaporator Coil Face Area (ft²)	12.8	12.8	12.8	12.8
Rows Deep/ Fins per Inch	4/16	4/16	4/16	4/16
CONDENSER FAN/COIL				
Quantity of Condenser Fan Motors	2	2	2	2
RPM (High/Low stage)	1050	1050	1050	1050
Outdoor Horsepower	1/3	1/3	1/3	1/3
Fan Diameter/ # Fan Blades	22/3	22/3	22/3	22/3
Face Area (ft²)	35.3	35.3	35.3	35.3
Rows Deep / Fins per Inch	2/28±1	2/28±1	2/28±1	2/28±1
COMPRESSOR				
Quantity / Type / Stages	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1
Compressor RLA / LRA	5.8/55.1	5.8/41.0	5.8/41.0	5.8/41.0
ELECTRICAL DATA				
Voltage-Phase-Frequency	460-3-60	575-3-60	575-3-60	575-3-60
Indoor Blower FLA	5.4	4	4	4
Max External Static (In. W.C.)	0.8	0.8	0.8	0.8
Outdoor Fan FLA	0.85	0.67	0.67	0.67
Min. Circuit Ampacity ¹	20.1	18.3	18.3	18.3
Max. Overcurrent Protection (A) ²	25	20	20	20
Power Supply Conduit Hole Dia. (in)	1.375	1.375	1.375	1.375
Low-Voltage Conduit Hole Dia. (in)	0.875	0.875	0.875	0.875
OPERATING WEIGHT (LBS.)				
Operating Weight (lbs)	1253	1253	1253	1253
SHIPPING WEIGHT (LBS.)				
Ship Weight (lbs)	1319	1319	1319	1319

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² May use fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

Model	DHG1023DL00001S	DHG1023DM00001S	DHG1023DH00001S	DHG1024DL00001S	DHG1024DM00001S
COOLING CAPACITY					
Total, BTU/h	102,000	102,000	102,000	102,000	102,000
IEER / EER	17.5/12.5	17.5/12.5	17.5/12.5	17.5/12.5	17.5/12.5
AHRI Reference #					
HEATING CAPACITY					
Heat Range	LOW	MEDIUM	HIGH	LOW	MEDIUM
No. of Burners	5	6	7	5	6
High Stage Input / Output (KBTU/H)	130/105.3	180/145.8	225/182.25	130/105.3	180/145.8
Low Stage Input / Output (KBTU/H)	97.5/79	135/109.35	168.75/136.69	97.5/79	135/109.35
Thermal Efficiency (T.E.)	81%	81%	81%	81%	81%
Annual Fuel Utilization Efficiency (AFUE)	N/A	N/A	N/A	N/A	N/A
High Stage Temperature Rise Range (°F)	25 - 55	25 - 55	40 - 70	25 - 55	25 - 55
Low Stage Temperature Rise Range (°F)	25 - 55	25 - 55	40 - 70	25 - 55	25 - 55
EVAPORATOR MOTOR COIL					
Motor Type	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE
External Static Pressure (ESP)	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD
Wheel Dia. X Width	Ø15.12 X 12.62	Ø15.12 X 12.62	Ø15.12 X 12.62	Ø15.12 X 12.62	Ø15.12 X 12.62
Indoor Nominal CFM	3025	3025	3025	3025	3025
RPM	300-1600	300-1600	300-1600	300-1600	300-1600
Indoor Horsepower	2.4	2.4	2.4	2.4	2.4
Filter Size (in)	20 X 25 X 2 (2) 25 X 25 X 2(2)	20 X 25 X 2 (2) 25 X 25 X 2(2)	20 X 25 X 2 (2) 25 X 25 X 2(2)	20 X 25 X 2 (2) 25 X 25 X 2(2)	"20 X 25 X 2 (2) 25 X 25 X 2(2)"
Drain Size (NPT)	3/4	3/4	3/4	3/4	3/4
R32 Refrigerant Charge (oz.)	123/124	123/124	123/124	123/124	123/124
Evaporator Coil Face Area (ft ²)	16.6	16.6	16.6	16.6	16.6
Rows Deep/ Fins per Inch	4/16	4/16	4/16	4/16	4/16
CONDENSER FAN/COIL					
Quantity of Condenser Fan Motors	2	2	2	2	2
RPM (High/Low stage)	1050	1050	1050	1050	1050
Outdoor Horsepower	1/3	1/3	1/3	1/3	1/3
Fan Diameter/ # Fan Blades	22/3	22/3	22/3	22/3	22/3
Face Area (ft ²)	35.3	35.3	35.3	35.3	35.3
Rows Deep / Fins per Inch	2/28±1	2/28±1	2/28±1	2/28±1	2/28±1
COMPRESSOR					
Quantity / Type / Stages	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1
Compressor RLA / LRA	6.3/55.0	6.3/55.0	6.3/55.0	6.0/41.0	6.4/55.1
ELECTRICAL DATA					
Voltage-Phase-Frequency	208/230-3-60	208/230-3-60	208/230-3-60	460-3-60	460-3-60
Indoor Blower FLA	8	8	8	5.4	5.4
Max External Static (In. W.C.)	0.8	0.8	0.8	0.8	0.8
Outdoor Fan FLA	2	2	2	0.85	0.85
Min. Circuit Ampacity ¹	43.7/43.7	43.7/43.7	43.7/43.7	21.5	21.5
Max. Overcurrent Protection (A) ²	50/50	50/50	50/50	25	25
Power Supply Conduit Hole Dia. (in)	1.375	1.375	1.375	1.375	1.375
Low-Voltage Conduit Hole Dia. (in)	0.875	0.875	0.875	0.875	0.875
OPERATING WEIGHT (LBS.)					
Operating Weight (lbs)	1268	1268	1268	1268	1268
SHIPPING WEIGHT (LBS.)					
Ship Weight (lbs)	1327	1327	1327	1327	1327

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² May use fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

Model	DHG1024DH00001S	DHG1027DL00001S	DHG1027DM00001S	DHG1027DH00001S
COOLING CAPACITY				
Total, BTU/h	102,000	102,000	102,000	102,000
IEER / EER	17.5/12.5	17.5/12.5	17.5/12.5	17.5/12.5
AHRI Reference #				
HEATING CAPACITY				
Heat Range	HIGH	LOW	MEDIUM	HIGH
No. of Burners	7	5	6	7
High Stage Input / Output (KBTU/H)	225/182.25	130/105.3	180/145.8	225/182.25
Low Stage Input / Output (KBTU/H)	168.75/136.69	97.5/79	135/109.35	168.75/136.69
Thermal Efficiency (T.E.)	81%	81%	81%	81%
Annual Fuel Utilization Efficiency (AFUE)	N/A	N/A	N/A	N/A
High Stage Temperature Rise Range (°F)	40 - 70	25 - 55	25 - 55	40 - 70
Low Stage Temperature Rise Range (°F)	40 - 70	25 - 55	25 - 55	40 - 70
EVAPORATOR MOTOR COIL				
Motor Type	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE
External Static Pressure (ESP)	STANDARD	STANDARD	STANDARD	STANDARD
Wheel Dia. X Width	Ø15.12 X 12.62	Ø15.12 X 12.62	Ø15.12 X 12.62	Ø15.12 X 12.62
Indoor Nominal CFM	3025	3025	3025	3025
RPM	300-1600	300-1600	300-1600	300-1600
Indoor Horsepower	2.4	2.4	2.4	2.4
Filter Size (in)	20 X 25 X 2 (2) 25 X 25 X 2(2)	20 X 25 X 2 (2) 25 X 25 X 2(2)	20 X 25 X 2 (2) 25 X 25 X 2(2)	20 X 25 X 2 (2) 25 X 25 X 2(2)
Drain Size (NPT)	3/4	3/4	3/4	3/4
R32 Refrigerant Charge (oz.)	123/124	123/124	123/124	123/124
Evaporator Coil Face Area (ft ²)	16.6	16.6	16.6	16.6
Rows Deep/ Fins per Inch	4/16	4/16	4/16	4/16
CONDENSER FAN/COIL				
Quantity of Condenser Fan Motors	2	2	2	2
RPM (High/Low stage)	1050	1050	1050	1050
Outdoor Horsepower	1/3	1/3	1/3	1/3
Fan Diameter/ # Fan Blades	22/3	22/3	22/3	22/3
Face Area (ft ²)	35.3	35.3	35.3	35.3
Rows Deep / Fins per Inch	2/28±1	2/28±1	2/28±1	2/28±1
COMPRESSOR				
Quantity / Type / Stages	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1
Compressor RLA / LRA	6.4/55.1	5.1/41.0	5.1/41.0	5.1/41.0
ELECTRICAL DATA				
Voltage-Phase-Frequency	460-3-60	575-3-60	575-3-60	575-3-60
Indoor Blower FLA	5.4	4	4	4
Max External Static (In. W.C.)	0.8	0.8	0.8	0.8
Outdoor Fan FLA	0.85	0.67	0.67	0.67
Min. Circuit Ampacity ¹	21.5	16.9	16.9	16.9
Max. Overcurrent Protection (A) ²	25	20	20	20
Power Supply Conduit Hole Dia. (in)	1.375	1.375	1.375	1.375
Low-Voltage Conduit Hole Dia. (in)	0.875	0.875	0.875	0.875
OPERATING WEIGHT (LBS.)				
Operating Weight (lbs)	1268	1268	1268	1268
SHIPPING WEIGHT (LBS.)				
Ship Weight (lbs)	1327	1327	1327	1327

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² May use fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

Model	DHG1203DL00001S	DHG1203DM00001S	DHG1203DH00001S	DHG1204DL00001S	DHG1204DM00001S
COOLING CAPACITY					
Total, BTU/h	116,000	116,000	116,000	116,000	116,000
IEER / EER	17/12.5	17/12.5	17/12.5	17/12.5	17/12.5
AHRI Reference #					
HEATING CAPACITY					
Heat Range	LOW	MEDIUM	HIGH	LOW	MEDIUM
No. of Burners	5	6	7	5	6
High Stage Input / Output (KBTU/H)	130/105.3	180/145.8	240/194.4	130/105.3	180/145.8
Low Stage Input / Output (KBTU/H)	97.5/79	135/109.35	180/145.8	97.5/79	135/109.35
Thermal Efficiency (T.E.)	81%	81%	81%	81%	81%
Annual Fuel Utilization Efficiency (AFUE)	N/A	N/A	N/A	N/A	N/A
High Stage Temperature Rise Range (°F)	25 - 55	25 - 55	30 - 60	25 - 55	25 - 55
Low Stage Temperature Rise Range (°F)	25 - 55	25 - 55	30 - 60	25 - 55	25 - 55
EVAPORATOR MOTOR COIL					
Motor Type	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE
External Static Pressure (ESP)	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD
Wheel Dia. X Width	Ø15.12 X 15.00	Ø15.12 X 15.00	Ø15.12 X 15.00	Ø15.12 X 15.00	Ø15.12 X 15.00
Indoor Nominal CFM	3500	3500	3500	3500	3500
RPM	300-1600	300-1600	300-1600	300-1600	300-1600
Indoor Horsepower	2.4	2.4	2.4	2.4	2.4
Filter Size (in)	20 X 25 X 2 (2) 25 X 25 X 2(2)	20 X 25 X 2 (2) 25 X 25 X 2(2)	20 X 25 X 2 (2) 25 X 25 X 2(2)	20 X 25 X 2 (2) 25 X 25 X 2(2)	20 X 25 X 2 (2) 25 X 25 X 2(2)
Drain Size (NPT)	3/4	3/4	3/4	3/4	3/4
R32 Refrigerant Charge (oz.)	142/146	142/146	142/146	142/146	142/146
Evaporator Coil Face Area (ft ²)	16.6	16.6	16.6	16.6	16.6
Rows Deep/ Fins per Inch	4/16	4/16	4/16	4/16	4/16
CONDENSER FAN/COIL					
Quantity of Condenser Fan Motors	2	2	2	2	2
RPM (High/Low stage)	1122	1122	1122	1050	1050
Outdoor Horsepower	1/3	1/3	1/3	1/3	1/3
Fan Diameter/ # Fan Blades	22/3	22/3	22/3	22/3	22/3
Face Area (ft ²)	39.6	39.6	39.6	39.6	39.6
Rows Deep / Fins per Inch	2/28±1	2/28±1	2/28±1	2/28±1	2/28±1
COMPRESSOR					
Quantity / Type / Stages	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1
Compressor RLA / LRA	15.4/156.4	15.4/156.4	15.4/156.4	7.7/69.0	7.7/69.0
ELECTRICAL DATA					
Voltage-Phase-Frequency	208/230-3-60	208/230-3-60	208/230-3-60	460-3-60	460-3-60
Indoor Blower FLA	8	8	8	5.4	5.4
Max External Static (In. W.C.)	0.8	0.8	0.8	0.8	0.8
Outdoor Fan FLA	2	2	2	0.85	0.85
Min. Circuit Ampacity ¹	46.6/46.6	46.6/46.6	46.6/46.6	24.4	24.4
Max. Overcurrent Protection (A) ²	60/60	60/60	60/60	30	30
Power Supply Conduit Hole Dia. (in)	1.375	1.375	1.375	1.375	1.375
Low-Voltage Conduit Hole Dia. (in)	0.875	0.875	0.875	0.875	0.875
OPERATING WEIGHT (LBS.)					
Operating Weight (lbs)	1296	1296	1296	1296	1296
SHIPPING WEIGHT (LBS.)					
Ship Weight (lbs)	1353	1353	1353	1353	1353

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² May use fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

Model	DHG1204DH00001S	DHG1207DL00001S	DHG1207DM00001S	DHG1207DH00001S
COOLING CAPACITY				
Total, BTU/h	116,000	116,000	116,000	116,000
IEER / EER	17/12.5	17/12.5	17/12.5	17/12.5
AHRI Reference #				
HEATING CAPACITY				
Heat Range	HIGH	LOW	MEDIUM	HIGH
No. of Burners	7	5	6	7
High Stage Input / Output (KBTU/H)	240/194.4	130/105.3	180/145.8	240/194.4
Low Stage Input / Output (KBTU/H)	180/145.8	97.5/79	135/109.35	180/145.8
Thermal Efficiency (T.E.)	81%	81%	81%	81%
Annual Fuel Utilization Efficiency (AFUE)	N/A	N/A	N/A	N/A
High Stage Temperature Rise Range (°F)	30 - 60	25 - 55	25 - 55	30 - 60
Low Stage Temperature Rise Range (°F)	30 - 60	25 - 55	25 - 55	30 - 60
EVAPORATOR MOTOR COIL				
Motor Type	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE
External Static Pressure (ESP)	STANDARD	STANDARD	STANDARD	STANDARD
Wheel Dia. X Width	Ø15.12 X 15.00	Ø15.12 X 15.00	Ø15.12 X 15.00	Ø15.12 X 15.00
Indoor Nominal CFM	3500	3500	3500	3500
RPM	300-1600	300-1600	300-1600	300-1600
Indoor Horsepower	2.4	2.4	2.4	2.4
Filter Size (in)	20 X 25 X 2 (2) 25 X 25 X 2(2)	20 X 25 X 2 (2) 25 X 25 X 2(2)	20 X 25 X 2 (2) 25 X 25 X 2(2)	20 X 25 X 2 (2) 25 X 25 X 2(2)
Drain Size (NPT)	3/4	3/4	3/4	3/4
R32 Refrigerant Charge (oz.)	142/146	142/146	142/146	142/146
Evaporator Coil Face Area (ft²)	16.6	16.6	16.6	16.6
Rows Deep/ Fins per Inch	4/16	4/16	4/16	4/16
CONDENSER FAN/COIL				
Quantity of Condenser Fan Motors	2	2	2	2
RPM (High/Low stage)	1050	1050	1050	1050
Outdoor Horsepower	1/3	1/3	1/3	1/3
Fan Diameter/ # Fan Blades	22/3	22/3	22/3	22/3
Face Area (ft²)	39.6	39.6	39.6	39.6
Rows Deep / Fins per Inch	2/28±1	2/28±1	2/28±1	2/28±1
COMPRESSOR				
Quantity / Type / Stages	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1
Compressor RLA / LRA	7.7/69.0	6.4/47.8	6.4/47.8	6.4/47.8
ELECTRICAL DATA				
Voltage-Phase-Frequency	460-3-60	575-3-60	575-3-60	575-3-60
Indoor Blower FLA	5.4	4	4	4
Max External Static (In. W.C.)	0.8	0.8	0.8	0.8
Outdoor Fan FLA	0.85	0.67	0.67	0.67
Min. Circuit Ampacity ¹	24.4	19.7	19.7	19.7
Max. Overcurrent Protection (A) ²	30	25	25	25
Power Supply Conduit Hole Dia. (in)	1.375	1.375	1.375	1.375
Low-Voltage Conduit Hole Dia. (in)	0.875	0.875	0.875	0.875
OPERATING WEIGHT (LBS.)				
Operating Weight (lbs)	1296	1296	1296	1296
SHIPPING WEIGHT (LBS.)				
Ship Weight (lbs)	1353	1353	1353	1353

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² May use fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

Model	DHG1503DL00001S	DHG1503DM00001S	DHG1503DH00001S	DHG1504DL00001S	DHG1504DM00001S	DHG1504DH00001S
COOLING CAPACITY						
Total, BTU/h	138,000	138,000	138,000	138,000	138,000	138,000
IEER / EER	16/12	16/12	16/12	16/12	16/12	16/12
AHRI Reference #						
HEATING CAPACITY						
Heat Range	LOW	MEDIUM	HIGH	LOW	MEDIUM	HIGH
No. of Burners	5	6	7	5	6	7
High Stage Input / Output (KBTU/H)	130/105.3	180/145.8	240/194.4	130/105.3	180/145.8	240/194.4
Low Stage Input / Output (KBTU/H)	97.5/79	135/109.35	180/145.8	97.5/79	135/109.35	180/145.8
Thermal Efficiency (T.E.)	81%	81%	81%	81%	81%	81%
Annual Fuel Utilization Efficiency (AFUE)	N/A	N/A	N/A	N/A	N/A	N/A
High Stage Temperature Rise Range (°F)	25 - 55	25 - 55	35 - 65	25 - 55	25 - 55	35 - 65
Low Stage Temperature Rise Range (°F)	25 - 55	25 - 55	35 - 65	25 - 55	25 - 55	35 - 65
EVAPORATOR MOTOR COIL						
Motor Type	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE
External Static Pressure (ESP)	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD
Wheel Dia. X Width	Ø15.12 X 15.00	Ø15.12 X 15.00	Ø15.12 X 15.00	Ø15.12 X 15.00	Ø15.12 X 15.00	Ø15.12 X 15.00
Indoor Nominal CFM	3800	3800	3800	3800	3800	3800
RPM	300-1600	300-1600	300-1600	300-1600	300-1600	300-1600
Indoor Horsepower	3.5	3.5	3.5	3.5	3.5	3.5
Filter Size (in)	25 X 25 X 2 (4)	25 X 25 X 2 (4)	25 X 25 X 2 (4)	25 X 25 X 2 (4)	25 X 25 X 2 (4)	25 X 25 X 2 (4)
Drain Size (NPT)	3/4	3/4	3/4	3/4	3/4	3/4
R32 Refrigerant Charge (oz.)	148/147	148/147	148/147	148/147	148/147	148/147
Evaporator Coil Face Area (ft ²)	19.1	19.1	19.1	19.1	19.1	19.1
Rows Deep/ Fins per Inch	4/16	4/16	4/16	4/16	4/16	4/16
CONDENSER FAN/COIL						
Quantity of Condenser Fan Motors	2	2	2	2	2	2
RPM (High/Low stage)	1150	1150	1150	1150	1150	1150
Outdoor Horsepower	1/3	1/3	1/3	1/3	1/3	1/3
Fan Diameter/ # Fan Blades	22/3	22/3	22/3	22/3	22/3	22/3
Face Area (ft ²)	43.8	43.8	43.8	43.8	43.8	43.8
Rows Deep / Fins per Inch	2/28±1	2/28±1	2/28±1	2/28±1	2/28±1	2/28±1
COMPRESSOR						
Quantity / Type / Stages	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1
Compressor RLA / LRA	19.2/156.5	19.2/156.5	19.2/156.5	9/74.8	9/74.8	9/74.8
ELECTRICAL DATA						
Voltage-Phase-Frequency	208/230-3-60	208/230-3-60	208/230-3-60	460-3-60	460-3-60	460-3-60
Indoor Blower FLA	10.9	10.9	10.9	7.2	7.2	7.2
Max External Static (In. W.C.)	0.8	0.8	0.8	0.8	0.8	0.8
Outdoor Fan FLA	3.5	3.5	3.5	1.6	1.6	1.6
Min. Circuit Ampacity ¹	61.1/61.1	61.1/61.1	61.1/61.1	30.6	30.6	30.6
Max. Overcurrent Protection (A) ²	80/80	80/80	80/80	35	35	35
Power Supply Conduit Hole Dia. (in)	1.375	1.375	1.375	1.375	1.375	1.375
Low-Voltage Conduit Hole Dia. (in)	0.875	0.875	0.875	0.875	0.875	0.875
OPERATING WEIGHT (LBS.)						
Operating Weight (lbs)	1310	1310	1310	1310	1310	1310
SHIPPING WEIGHT (LBS.)						
Ship Weight (lbs)	1368	1368	1368	1368	1368	1368

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² May use fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

Model	DHG1507DL00001S	DHG1507DM00001S	DHG1507DH00001S	DHG1503WL00001F	DHG1503WM00001F	DHG1503WH00001F
COOLING CAPACITY						
Total, BTU/h	138,000	138,000	138,000	138,000	138,000	138,000
IEER / EER	16/12	16/12	16/12	16/12	16/12	16/12
AHRI Reference #						
HEATING CAPACITY						
Heat Range	LOW	MEDIUM	HIGH	LOW	MEDIUM	HIGH
No. of Burners	5	6	7	5	6	7
High Stage Input / Output (KBTU/H)	130/105.3	180/145.8	240/194.4	130/105.3	180/145.8	240/194.4
Low Stage Input / Output (KBTU/H)	97.5/79	135/109.35	180/145.8	97.5/79	135/109.35	180/145.8
Thermal Efficiency (T.E.)	81%	81%	81%	81%	81%	81%
Annual Fuel Utilization Efficiency (AFUE)	N/A	N/A	N/A	N/A	N/A	N/A
High Stage Temperature Rise Range (°F)	25 - 55	25 - 55	35 - 65	25 - 55	25 - 55	35 - 65
Low Stage Temperature Rise Range (°F)	25 - 55	25 - 55	35 - 65	25 - 55	25 - 55	35 - 65
EVAPORATOR MOTOR COIL						
Motor Type	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE
External Static Pressure (ESP)	STANDARD	STANDARD	STANDARD	HIGH	HIGH	HIGH
Wheel Dia. X Width	Ø15.12 X 15.00	Ø15.12 X 15.00	Ø15.12 X 15.00	Ø15.12 X 15.00	Ø15.12 X 15.00	Ø15.12 X 15.00
Indoor Nominal CFM	3800	3800	3800	3800	3800	3800
RPM	300-1600	300-1600	300-1600	300-1600	300-1600	300-1600
Indoor Horsepower	3.5	3.5	3.5	5.0	5.0	5.0
Filter Size (in)	25 X 25 X 2 (4)	25 X 25 X 2 (4)	25 X 25 X 2 (4)	25 X 25 X 2 (4)	25 X 25 X 2 (4)	25 X 25 X 2 (4)
Drain Size (NPT)	3/4	3/4	3/4	3/4	3/4	3/4
R32 Refrigerant Charge (oz.)	148/147	148/147	148/147	148/147	148/147	148/147
Evaporator Coil Face Area (ft ²)	19.1	19.1	19.1	19.1	19.1	19.1
Rows Deep/ Fins per Inch	4/16	4/16	4/16	4/16	4/16	4/16
CONDENSER FAN/COIL						
Quantity of Condenser Fan Motors	2	2	2	2	2	2
RPM (High/Low stage)	1150	1150	1150	1150	1150	1150
Outdoor Horsepower	1/3	1/3	1/3	1/3	1/3	1/3
Fan Diameter/ # Fan Blades	22/3	22/3	22/3	22/3	22/3	22/3
Face Area (ft ²)	43.8	43.8	43.8	43.8	43.8	43.8
Rows Deep / Fins per Inch	2/28±1	2/28±1	2/28±1	2/28±1	2/28±1	2/28±1
COMPRESSOR						
Quantity / Type / Stages	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1
Compressor RLA / LRA	7.1/53.9	7.1/53.9	7.1/53.9	19.2/156.5	19.2/156.5	19.2/156.5
ELECTRICAL DATA						
Voltage-Phase-Frequency	575-3-60	575-3-60	575-3-60	208/230-3-60	208/230-3-60	208/230-3-60
Indoor Blower FLA	5	5	5	14.5	14.5	14.5
Max External Static (In. W.C.)	0.8	0.8	0.8	2	2	2
Outdoor Fan FLA	1.54	1.54	1.54	3.5	3.5	3.5
Min. Circuit Ampacity ¹	23.9	23.9	23.9	64.7/64.7	64.7/64.7	64.7/64.7
Max. Overcurrent Protection (A) ²	30	30	30	80/80	80/80	80/80
Power Supply Conduit Hole Dia. (in)	1.375	1.375	1.375	1.375	1.375	1.375
Low-Voltage Conduit Hole Dia. (in)	0.875	0.875	0.875	0.875	0.875	0.875
OPERATING WEIGHT (LBS.)						
Operating Weight (lbs)	1310	1310	1310	1310	1310	1310
SHIPPING WEIGHT (LBS.)						
Ship Weight (lbs)	1368	1368	1368	1368	1368	1368

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² May use fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

Model	DHG1504WL00001F	DHG1504WM00001F	DHG1504WH00001F	DHG1507WL00001F	DHG1507WM00001F	DHG1507WH00001F
COOLING CAPACITY						
Total, BTU/h	138,000	138,000	138,000	138,000	138,000	138,000
IEER / EER	16/12	16/12	16/12	16/12	16/12	16/12
AHRI Reference #						
HEATING CAPACITY						
Heat Range	LOW	MEDIUM	HIGH	LOW	MEDIUM	HIGH
No. of Burners	5	6	7	5	6	7
High Stage Input / Output (KBTU/H)	130/105.3	180/145.8	240/194.4	130/105.3	180/145.8	240/194.4
Low Stage Input / Output (KBTU/H)	97.5/79	135/109.35	180/145.8	97.5/79	135/109.35	180/145.8
Thermal Efficiency (T.E.)	81%	81%	81%	81%	81%	81%
Annual Fuel Utilization Efficiency (AFUE)	N/A	N/A	N/A	N/A	N/A	N/A
High Stage Temperature Rise Range (°F)	25 - 55	25 - 55	35 - 65	25 - 55	25 - 55	35 - 65
Low Stage Temperature Rise Range (°F)	25 - 55	25 - 55	35 - 65	25 - 55	25 - 55	35 - 65
EVAPORATOR MOTOR COIL						
Motor Type	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE	DIRECT DRIVE
External Static Pressure (ESP)	HIGH	HIGH	HIGH	HIGH	HIGH	HIGH
Wheel Dia. X Width	Ø15.12 X 15.00	Ø15.12 X 15.00	Ø15.12 X 15.00	Ø15.12 X 15.00	Ø15.12 X 15.00	Ø15.12 X 15.00
Indoor Nominal CFM	3800	3800	3800	3800	3800	3800
RPM	300-1600	300-1600	300-1600	300-1600	300-1600	300-1600
Indoor Horsepower	5.0	5.0	5.0	5.0	5.0	5.0
Filter Size (in)	25 X 25 X 2 (4)	25 X 25 X 2 (4)	25 X 25 X 2 (4)	25 X 25 X 2 (4)	25 X 25 X 2 (4)	25 X 25 X 2 (4)
Drain Size (NPT)	3/4	3/4	3/4	3/4	3/4	3/4
R32 Refrigerant Charge (oz.)	148/147	148/147	148/147	148/147	148/147	148/147
Evaporator Coil Face Area (ft ²)	19.1	19.1	19.1	19.1	19.1	19.1
Rows Deep/ Fins per Inch	4/16	4/16	4/16	4/16	4/16	4/16
CONDENSER FAN/COIL						
Quantity of Condenser Fan Motors	2	2	2	2	2	2
RPM (High/Low stage)	1150	1150	1150	1150	1150	1150
Outdoor Horsepower	1/3	1/3	1/3	1/3	1/3	1/3
Fan Diameter/ # Fan Blades	22/3	22/3	22/3	22/3	22/3	22/3
Face Area (ft ²)	43.8	43.8	43.8	43.8	43.8	43.8
Rows Deep / Fins per Inch	2/28±1	2/28±1	2/28±1	2/28±1	2/28±1	2/28±1
COMPRESSOR						
Quantity / Type / Stages	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1	2/SCROLL/1
Compressor RLA / LRA	9/74.8	9/74.8	9/74.8	7.1/53.9	7.1/53.9	7.1/53.9
ELECTRICAL DATA						
Voltage-Phase-Frequency	460-3-60	460-3-60	460-3-60	575-3-60	575-3-60	575-3-60
Indoor Blower FLA	10.6	10.6	10.6	7.2	7.2	7.2
Max External Static (In. W.C.)	2	2	2	2	2	2
Outdoor Fan FLA	1.6	1.6	1.6	1.54	1.54	1.54
Min. Circuit Ampacity ¹	34.0	34.0	34.0	26.1	26.1	26.1
Max. Overcurrent Protection (A) ²	40	40	40	30	30	30
Power Supply Conduit Hole Dia. (in)	1.375	1.375	1.375	1.375	1.375	1.375
Low-Voltage Conduit Hole Dia. (in)	0.875	0.875	0.875	0.875	0.875	0.875
OPERATING WEIGHT (LBS.)						
Operating Weight (lbs)	1310	1310	1310	1310	1310	1310
SHIPPING WEIGHT (LBS.)						
Ship Weight (lbs)	1368	1368	1368	1368	1368	1368

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² May use fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

Coil Dimensions

Model	Tons	Indoor			Outdoor		
		Fin height in.	Fin length in.	Area (Ft ²)	Fin height in.	Fin length in.	Area (Ft ²)
DHG	7.5	34.6	53.1	12.8	47.9	53.1	35.3
	8.5	45.0	53.1	16.6	47.9	53.1	35.3
	10	45.0	53.1	16.6	47.9	59.6	39.6
	12.5	52.0	53.1	19.1	52.9	59.6	43.8

AHRI Ratings

MODEL	CAPACITY	EER	IEER
DHG090	90,000	12.5	17.5
DHG102	102,000	12.5	17.5
DHG120	116,000	12.5	17
DHG150	138,000	12	16

Sound Data

Model	OUTDOOR SOUND (DB) AT 60 Hz								
	A-Weighted	63	125	250	500	1000	2000	4000	8000
090	82.9	84.1	82	79.7	77.6	75.2	71.7	69	69
102	80.2	81.1	78.7	77.1	76.1	70.8	66.5	64.1	64.1
120	81.8	82.8	81.9	79.1	76.9	72.9	68.3	66	66
150	85	75.8	76.4	78.5	78.2	77.7	74.7	70.4	64.7




Notes:

¹ Outdoor sound data is measured in accordance with AHRI standard 270.

² Measurements are expressed in terms of sound power. Do not compare these values to sound pressure values because sound pressure depends on specific environment factors which normally do not match individual applications. Sound power values are independent of the environment and therefore more accurate.

³ A-weighted sound ratings filter out high and very low frequencies, to better approximate the response of "average" human ear. A-weighted measurements for Daikin units are taken in accordance with AHRI standard 270.

Model Size	DIM "A"
DHG090	54 ³ / ₅ "
DHG102	54 ³ / ₅ "
DHG120	54 ³ / ₅ "
DHG150	58 ³ / ₅ "

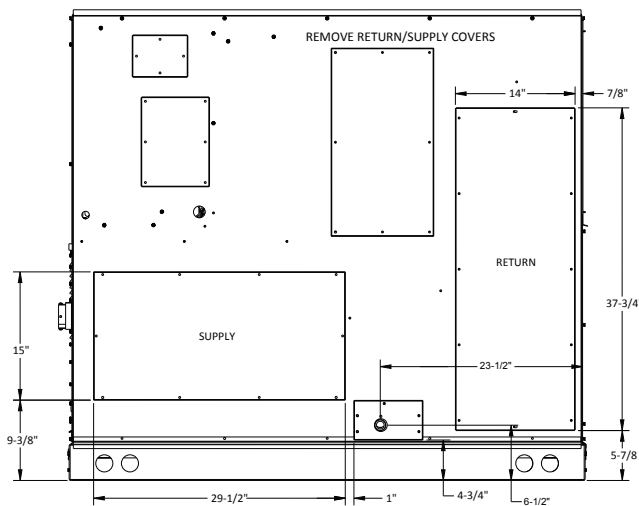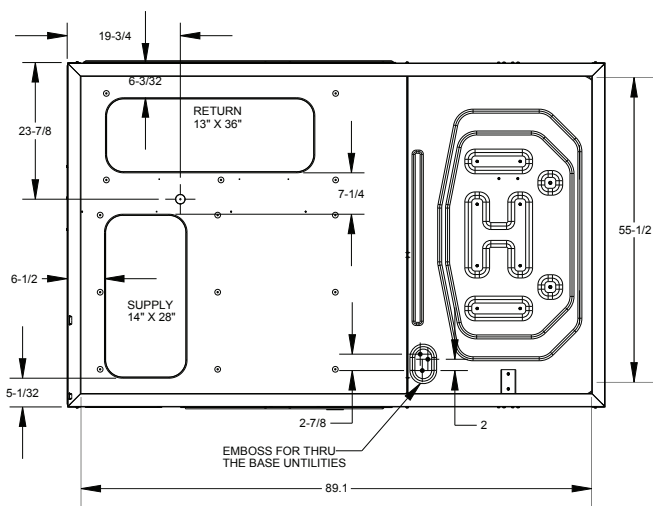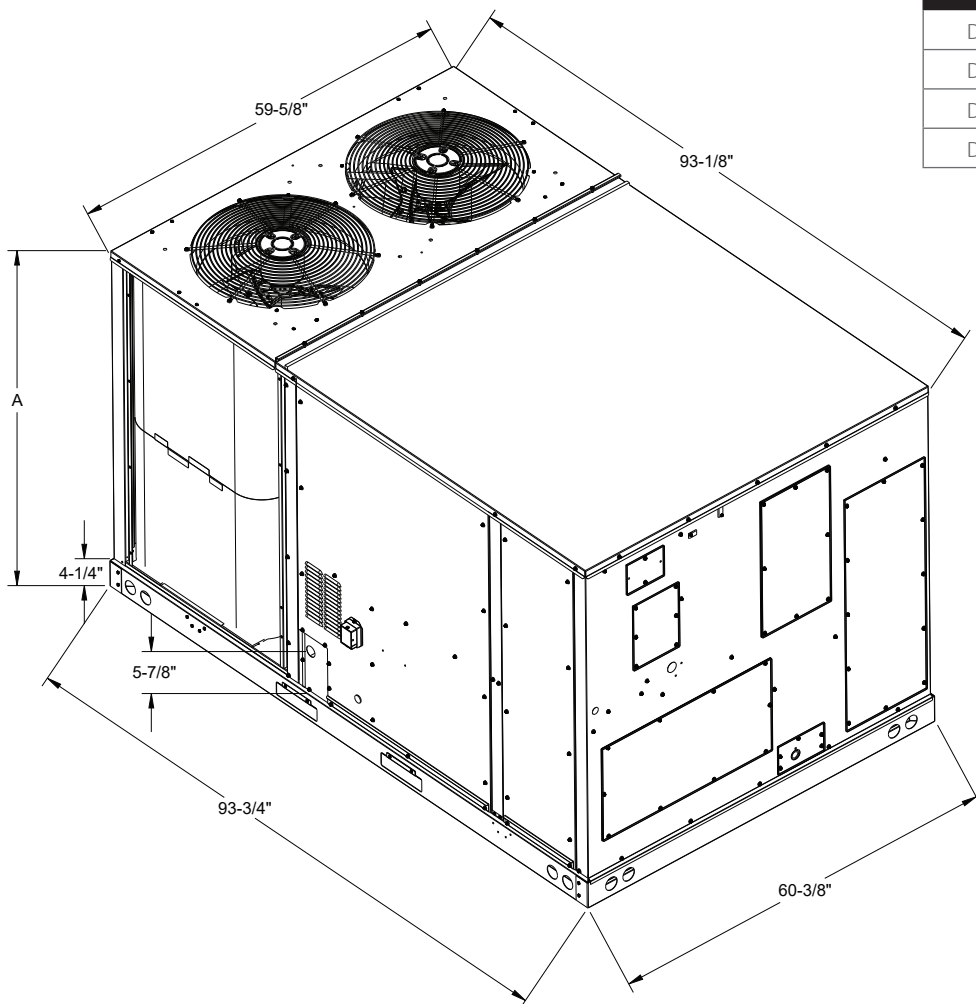

IDB		Airflow		Outdoor Ambient Temperature												115				
				85			75			95			105							
				59	63	71	59	63	71	59	63	71	59	63	71					
70	2625	MBh	91.6	92.9	95.6	90.7	92.0	94.8	88.4	89.6	92.4	84.2	85.5	88.3	79.2	80.5	83.2	74.6	75.9	78.7
		S/T	0.61	0.54	0.40	0.62	0.54	0.40	0.64	0.57	0.43	1.00	0.59	0.45	1.00	0.61	0.47	1.00	0.66	0.52
		ΔT	19.75	17.92	14.51	19.70	17.87	14.46	19.95	18.13	14.72	19.68	17.85	14.44	19.43	17.61	14.20	20.58	18.75	15.34
		kW	5.29	5.29	5.28	5.88	5.87	5.86	6.53	6.53	6.52	7.24	7.23	7.22	8.03	8.02	8.01	8.96	8.95	8.94
		Amps	20.22	20.00	19.95	22.70	22.68	22.63	25.69	25.67	25.63	28.93	28.91	28.86	32.55	32.53	32.48	36.79	36.77	36.73
		Hi PR	248	249	251	287	288	290	328	329	331	372	373	375	419	420	422	470	471	473
	Lo PR	128	130	133	136	138	141	143	144	148	149	150	154	154	156	159	161	163	166	
	3000	MBh	92.8	94.1	96.8	91.9	93.2	96.0	89.6	90.9	93.6	85.4	86.7	89.5	80.4	81.7	84.4	75.8	77.1	79.9
		S/T	0.67	0.60	0.46	0.68	0.60	0.47	1.00	0.63	0.49	1.00	0.65	0.51	1.00	0.67	0.53	1.00	1.00	0.58
		ΔT	18.64	16.82	13.41	18.59	16.77	13.36	18.85	17.02	13.61	18.57	16.75	13.34	18.33	16.50	13.09	19.47	17.65	14.24
		kW	5.32	5.32	5.31	5.91	5.90	5.89	6.56	6.56	6.55	7.27	7.26	7.25	8.06	8.05	8.04	8.99	8.98	8.97
		Amps	20.16	20.14	20.09	22.84	22.82	22.77	25.83	25.81	25.76	29.07	29.05	29.00	32.69	32.67	32.62	36.93	36.91	36.86
Hi PR		250	251	253	289	290	292	330	331	333	374	375	377	422	423	424	472	473	475	
Lo PR	130	132	135	138	140	143	145	146	150	151	152	155	156	158	161	163	165	168		
3375	MBh	94.2	95.5	98.2	93.4	94.7	97.4	91.0	92.3	95.0	86.9	88.2	90.9	81.9	83.2	85.9	77.3	78.6	81.3	
	S/T	0.71	0.63	0.49	0.71	0.64	0.50	1.00	0.66	0.52	1.00	0.68	0.54	1.00	0.70	0.57	1.00	1.00	0.62	
	ΔT	17.71	15.89	12.48	17.66	15.84	12.43	17.92	16.09	12.68	17.65	15.82	12.41	17.40	15.58	12.17	18.54	16.72	13.31	
	kW	5.35	5.34	5.33	5.93	5.93	5.92	6.59	6.58	6.57	7.29	7.29	7.28	8.08	8.08	8.07	9.01	9.01	9.00	
	Amps	20.28	20.25	20.21	22.96	22.93	22.89	25.95	25.93	25.88	29.19	29.17	29.12	32.80	32.78	32.74	37.05	37.03	36.98	
	Hi PR	252	253	255	291	292	294	332	333	335	376	377	379	424	425	426	474	475	477	
Lo PR	132	134	137	140	142	145	147	148	152	153	154	158	158	160	163	165	167	170		
75	2625	MBh	91.6	92.9	95.6	90.8	92.1	94.8	88.4	89.7	92.4	84.3	85.6	88.3	79.3	80.6	83.3	74.7	76.0	78.7
		S/T	0.74	0.67	0.53	1.00	0.67	0.53	1.00	0.70	0.56	1.00	0.72	0.58	1.00	1.00	0.60	1.00	1.00	0.65
		ΔT	23.76	21.93	18.53	23.71	21.88	18.48	23.97	22.14	18.73	23.69	21.87	18.46	23.45	21.62	18.21	24.59	22.77	19.36
		kW	5.29	5.28	5.27	5.87	5.87	5.86	6.53	6.52	6.51	7.23	7.23	7.22	8.02	8.02	8.01	8.95	8.95	8.94
		Amps	20.00	19.98	19.94	22.68	22.66	22.62	25.68	25.65	25.61	28.91	28.89	28.85	32.53	32.51	32.46	36.78	36.75	36.71
		Hi PR	248	249	251	287	288	290	328	329	331	372	373	375	420	421	422	470	471	473
	Lo PR	128	130	133	136	138	141	143	145	148	153.2	149	150	154	156	159	161	163	166	
	3000	MBh	92.8	94.1	96.8	92.0	93.3	96.0	89.6	90.9	93.6	85.5	86.8	89.5	80.5	81.8	84.5	75.9	77.2	79.9
		S/T	0.80	0.73	0.59	1.00	0.73	0.60	1.00	0.76	0.62	1.00	0.78	0.64	1.00	1.00	0.66	1.00	1.00	0.71
		ΔT	22.66	20.83	17.42	22.61	20.78	17.37	22.86	21.04	17.63	22.59	20.76	17.35	22.35	20.52	17.11	23.49	21.66	18.25
		kW	5.32	5.31	5.30	5.90	5.90	5.89	6.56	6.55	6.54	7.26	7.26	7.25	8.05	8.05	8.04	8.98	8.98	8.97
		Amps	20.14	20.12	20.07	22.82	22.80	22.76	25.81	25.79	25.75	29.05	29.03	28.99	32.67	32.65	32.60	36.91	36.89	36.85
Hi PR		250	251	253	289	290	292	330	331	333	374	375	377	422	423	425	472	474	475	
Lo PR	130	132	135	138	140	143	145	146	150	155.1	151	152	155	156	158	163	165	168		
3375	MBh	94.3	95.6	98.3	93.4	94.7	97.5	91.1	92.3	95.1	86.9	88.2	91.0	81.9	83.2	85.9	77.3	78.6	81.4	
	S/T	0.84	0.76	0.62	1.00	0.77	0.63	1.00	0.79	0.65	1.00	0.81	0.67	1.00	1.00	0.70	1.00	1.00	0.75	
	ΔT	21.73	19.90	16.49	21.68	19.85	16.44	21.94	20.11	16.70	21.66	19.83	16.42	21.42	19.59	16.18	22.56	20.73	17.32	
	kW	5.34	5.34	5.33	5.93	5.92	5.91	6.58	6.58	6.57	7.29	7.29	7.28	8.08	8.08	8.07	9.01	9.01	8.99	
	Amps	20.26	20.24	20.19	22.94	22.92	22.87	25.93	25.91	25.86	29.17	29.15	29.10	32.79	32.77	32.72	37.03	37.01	36.96	
	Hi PR	252	253	255	291	292	294	332	333	335	376	377	379	424	425	427	475	476	477	
Lo PR	132	134	137	140	142	145	147	148	152	153	154	158	158	160	163	165	167	170		

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 Design Subcooling, 16 - 19 °F @ the liquid access fitting connection ARI 95 test conditions. Design Superheat 8 - 12 °F @ the compressor suction access fitting connection.

Shaded area reflects ACCA (TVA) conditions

kW = Total system power
 Amps: Unit amps (comp.+ evaporator + condenser fan motors)

Heating Rating Table - Natural Gas and Propane¹

UNIT	RATED HIGH INPUT (MBH)	GAS HEAT	INPUT/OUTPUT (MBH)	TEMP RISE HIGH (°F)	TEMP RISE LOW (°F)	THERMAL EFFICIENCY (T.E.)	RECOMMENDED MINIMUM AIRFLOW (SCFM)	RECOMMENDED MAXIMUM AIRFLOW (SCFM)
DHG090	130	High	130/105.3	25 - 55		81%	1765	3882
		Low	97.5/79		25-55		1323	2912
	180	High	180/145.8	25 - 55		81%	2443	5375
		Low	135/109.35		25-55		1832	4031
	225	High	225/182.25	40 - 70		81%	2400	4199
		Low	168.75/136.69		40 - 70		1800	3149
DHG102	130	High	130/105.3	25 - 55		81%	1765	3882
		Low	97.5/79		25-55		1323	2912
	180	High	180/145.8	25 - 55		81%	2443	5375
		Low	135/109.35		25-55		1832	4031
	225	High	225/182.25	40 - 70		81%	2400	4199
		Low	168.75/136.69		40 - 70		1800	3149
DHG120	130	High	130/105.3	25 - 55		81%	1765	3882
		Low	97.5/79		25-55		1323	2912
	180	High	180/145.8	25 - 55		81%	2443	5375
		Low	135/109.35		25-55		1832	4031
	240	High	240/194.4	30 - 60		81%	2986	5972
		Low	180/145.8		30 - 60		2240	4479
DHG150	130	High	130/105.3	25 - 55		81%	1765	3882
		Low	97.5/79		25-55		1323	2912
	180	High	180/145.8	25 - 55		81%	2443	5375
		Low	135/109.35		25-55		1832	4031
	240	High	240/194.4	35 - 65		81%	2756	5119
		Low	180/145.8		35 - 65		2067	3839

¹LP High Fire Rate is Reduced 10% that of Natural Gas

Heat Exchanger and Burner Orifice Specifications

UNIT	MAXIMUM INPUT (BTUH)	NUMBER OF BURNERS	NG ORIFICE	LP ORIFICE
DHG090	130,000	5	41	54
	180,000	6	37	53
	225,000	7	36	52
DHG102	130,000	5	41	54
	180,000	6	37	53
	225,000	7	36	52
DHG120	130,000	5	41	54
	180,000	6	37	53
	240,000	7	34	51
DHG150	130,000	5	41	54
	180,000	6	37	53
	240,000	7	34	51

7.5 Ton • 130 MBH Gas Heat Exchanger • Standard Static Direct Drive

Models: DHG0903DL, DHG0904DL, DHG0907DL

Down Flow				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	1882	544	0.38
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	2589	629	0.67
	0.4	2410	681	0.73
	0.6	2216	734	0.79
	0.8	2038	782	0.84
T3	0.2	3144	708	1.01
	0.4	2961	753	1.08
	0.6	2802	799	1.14
	0.8	2651	841	1.20
T4	0.2	3413	753	1.23
	0.4	3222	794	1.29
	0.6	3070	836	1.36
	0.8	2940	875	1.43
T5	0.2	3622	793	1.43
	0.4	3422	830	1.50
	0.6	3268	868	1.57
	0.8	3160	904	1.64
T6**	0.2	1901	546	0.38
	0.4	1713	605	0.42
	0.6	1453	667	0.47
	0.8	-	-	-
T7**	0.2	2107	569	0.46
	0.4	1922	627	0.50
	0.6	1684	686	0.55
	0.8	1495	738	0.59
T8	0.2	2301	592	0.54
	0.4	2119	648	0.59
	0.6	1900	704	0.64
	0.8	-	-	-
T9	0.2	2920	674	0.86
	0.4	2740	722	0.92
	0.6	2569	771	0.98
	0.8	2405	816	1.04
T10	0.2	3427	756	1.24
	0.4	3236	797	1.31
	0.6	3084	838	1.38
	0.8	2955	877	1.44

Horizontal Flow				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2029	488	0.34
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	2748	571	0.61
	0.4	2554	627	0.67
	0.6	2337	697	0.75
	0.8	2148	750	0.80
T3	0.2	3289	649	0.93
	0.4	3133	690	0.99
	0.6	2972	745	1.06
	0.8	2802	792	1.13
T4	0.2	3539	693	1.13
	0.4	3419	726	1.18
	0.6	3282	773	1.26
	0.8	3132	816	1.33
T5	0.2	3724	732	1.32
	0.4	3647	757	1.37
	0.6	3525	797	1.44
	0.8	3401	836	1.51
T6**	0.2	2048	490	0.34
	0.4	1853	561	0.39
	0.6	1559	646	0.45
	0.8	1374	707	0.49
T7**	0.2	2260	513	0.41
	0.4	2061	580	0.47
	0.6	1791	660	0.53
	0.8	1602	719	0.58
T8	0.2	2458	535	0.49
	0.4	2259	598	0.54
	0.6	2011	674	0.61
	0.8	1820	731	0.66
T9	0.2	3074	616	0.79
	0.4	2897	663	0.85
	0.6	2715	724	0.92
	0.8	2534	774	0.99
T10	0.2	3552	696	1.14
	0.4	3435	728	1.20
	0.6	3299	774	1.27
	0.8	3151	817	1.34

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

7.5 Ton • 130 MBH Gas Heat Exchanger • Medium Static Direct Drive

Models: DHG0903LL, DHG0904LL, DHG0907LL

DOWN FLOW					HORIZONTAL FLOW					
SPEED TAP	ESP	CFM	RPM	BHP	SPEED TAP	ESP	CFM	RPM	BHP	
T1**	0.2	1882	544	0.38	T1**	0.2	2029	488	0.34	
	0.4	-	-	-		0.4	-	-	-	-
	0.6	-	-	-		0.6	-	-	-	-
	0.8	-	-	-		0.8	-	-	-	-
	1.0	-	-	-		1.0	-	-	-	-
	1.2	-	-	-		1.2	-	-	-	-
	1.4	-	-	-		1.4	-	-	-	-
T2**	0.2	3059	695	0.95	T2**	0.2	3208	636	0.87	
	0.4	2877	741	1.01		0.4	3043	680	0.93	
	0.6	2714	788	1.08		0.6	2874	737	1.01	
	0.8	2558	831	1.14		0.8	2699	785	1.07	
	1.0	2412	870	1.19		1.0	2519	829	1.13	
	1.2	2218	922	1.26		1.2	2312	884	1.21	
	1.4	2028	965	1.32		1.4	2103	948	1.30	
T3	0.2	3144	708	1.01	T3	0.2	3289	649	0.93	
	0.4	2961	753	1.08		0.4	3133	690	0.99	
	0.6	2802	799	1.14		0.6	2972	745	1.06	
	0.8	2651	841	1.20		0.8	2802	792	1.13	
	1.0	2493	880	1.26		1.0	2632	836	1.19	
	1.2	2307	930	1.33		1.2	2436	889	1.27	
	1.4	-	-	-		1.4	-	-	-	-
T4	0.2	-	-	-	T4	0.2	-	-	-	
	0.4	3622	874	1.77		0.4	-	-	-	-
	0.6	3458	907	1.83		0.6	-	-	-	-
	0.8	3380	940	1.90		0.8	3693	861	1.74	
	1.0	3265	975	1.97		1.0	3575	905	1.83	
	1.2	3138	1008	2.04		1.2	3461	941	1.90	
	1.4	2994	1043	2.11		1.4	3345	991	2.00	
T5	0.2	-	-	-	T5	0.2	-	-	-	
	0.4	3725	901	1.94		0.4	-	-	-	-
	0.6	3549	931	2.00		0.6	-	-	-	-
	0.8	3492	961	2.07		0.8	-	-	-	-
	1.0	3423	996	2.15		1.0	3737	920	1.98	
	1.2	3307	1026	2.21		1.2	3633	952	2.05	
	1.4	3180	1059	2.28		1.4	3524	999	2.15	
T6**	0.2	2139	573	0.47	T6**	0.2	2293	516	0.42	
	0.4	1955	630	0.52		0.4	2093	583	0.48	
	0.6	1720	689	0.57		0.6	1827	663	0.54	
	0.8	1531	741	0.61		0.8	1637	721	0.59	
	1.0	1623	782	0.64		1.0	-	-	-	-
	1.2	1351	849	0.70		1.2	-	-	-	-
	1.4	-	-	-		1.4	-	-	-	-
T7**	0.2	2691	642	0.73	T7**	0.2	2849	584	0.66	
	0.4	2512	693	0.78		0.4	2659	638	0.72	
	0.6	2325	745	0.84		0.6	2453	705	0.80	
	0.8	2152	792	0.90		0.8	2265	757	0.86	
	1.0	2079	832	0.94		1.0	2034	801	0.91	
	1.2	1854	890	1.01		1.2	1777	864	0.98	
	1.4	1662	937	1.06		1.4	1511	932	1.05	
T8	0.2	3162	711	1.02	T8	0.2	3307	652	0.94	
	0.4	2979	756	1.09		0.4	3152	692	1.00	
	0.6	2820	801	1.15		0.6	2993	747	1.08	
	0.8	2671	843	1.22		0.8	2824	794	1.14	
	1.0	2511	882	1.27		1.0	2657	837	1.21	
	1.2	2326	931	1.34		1.2	2463	891	1.28	
	1.4	2139	974	1.40		1.4	2269	952	1.37	
T9	0.2	3681	805	1.50	T9	0.2	3774	744	1.39	
	0.4	3477	842	1.57		0.4	3713	767	1.43	
	0.6	3322	878	1.64		0.6	3594	804	1.50	
	0.8	3220	913	1.70		0.8	3478	843	1.57	
	1.0	3066	950	1.77		1.0	3356	886	1.65	
	1.2	2925	987	1.84		1.2	3226	927	1.73	
	1.4	2765	1024	1.91		1.4	3096	980	1.83	
T10	0.2	-	-	-	T10	0.2	-	-	-	
	0.4	3811	927	2.12		0.4	-	-	-	-
	0.6	3620	954	2.18		0.6	-	-	-	-
	0.8	3586	983	2.25		0.8	-	-	-	-
	1.0	3578	1017	2.32		1.0	3881	936	2.14	
	1.2	3471	1043	2.38		1.2	3786	964	2.20	
	1.4	3363	1074	2.45		1.4	3680	1008	2.30	

shaded speed tap - Gas heating airflow.

** (T1) (T2) and (T6) (T7) are part load only.

7.5 Ton • 130 MBH Gas Heat Exchanger • High Static Direct Drive

Models: DHG0903WL, DHG0904WL, DHG0907WL

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	1882	544	0.38
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T2**	0.2	3527	774	1.34
	0.4	3332	814	1.40
	0.6	3180	853	1.47
	0.8	3061	891	1.54
	1.0	2889	927	1.60
	1.2	2735	969	1.67
	1.4	2563	1008	1.74
	1.6	2392	1050	1.81
	1.8	2237	1086	1.87
2.0	2077	1119	1.93	
T3	0.2	3144	708	1.01
	0.4	2961	753	1.08
	0.6	2802	799	1.14
	0.8	2651	841	1.20
	1.0	2493	880	1.26
	1.2	2307	930	1.33
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T4	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	3620	1023	2.37
	1.2	3514	1048	2.43
	1.4	3412	1078	2.50
	1.6	3263	1117	2.59
	1.8	3081	1148	2.66
2.0	2915	1184	2.75	
T5	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	3728	1071	2.68
	1.4	3656	1100	2.75
	1.6	3519	1137	2.84
	1.8	3325	1166	2.91
2.0	3161	1203	3.01	
T6**	0.2	2457	612	0.61
	0.4	2277	665	0.66
	0.6	2072	720	0.72
	0.8	1891	769	0.77
	1.0	1881	810	0.81
	1.2	1636	872	0.87
	1.4	1447	921	0.92
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2029	488	0.34
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T2**	0.2	3642	714	1.23
	0.4	3544	743	1.28
	0.6	3415	786	1.36
	0.8	3278	827	1.43
	1.0	3147	870	1.50
	1.2	2998	915	1.58
	1.4	2852	971	1.68
	1.6	2666	1010	1.74
	1.8	2482	1060	1.83
2.0	2323	1096	1.89	
T3	0.2	3289	649	0.93
	0.4	3133	690	0.99
	0.6	2972	745	1.06
	0.8	2802	792	1.13
	1.0	2632	836	1.19
	1.2	2436	889	1.27
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T4	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	3718	1010	2.34
	1.6	3610	1040	2.41
	1.8	3473	1094	2.54
2.0	3351	1130	2.62	
T5	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	3825	1049	2.62
	1.8	3707	1104	2.76
2.0	3599	1140	2.85	
T6**	0.2	2616	554	0.55
	0.4	2418	613	0.61
	0.6	2188	686	0.68
	0.8	1997	741	0.74
	1.0	1729	785	0.78
	1.2	1439	852	0.85
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

7.5 Ton • 130 MBH Gas Heat Exchanger • High Static Direct Drive

Models: DHG0903WL, DHG0904WL, DHG0907WL

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	-	-	-
	0.4	2838	735	0.99
	0.6	2672	783	1.05
	0.8	2514	827	1.11
	1.0	2374	866	1.16
	1.2	2177	918	1.23
	1.4	1986	962	1.29
	1.6	1815	1006	1.35
	1.8	1667	1046	1.40
T8	2.0	1522	1077	1.44
	0.2	3482	766	1.29
	0.4	3289	806	1.36
	0.6	3137	846	1.43
	0.8	3014	884	1.49
	1.0	2840	921	1.55
	1.2	2682	964	1.63
	1.4	2507	1003	1.69
	1.6	2335	1045	1.76
T9	1.8	2182	1082	1.83
	2.0	2022	1115	1.88
	0.2	-	-	-
	0.4	3783	918	2.06
	0.6	3598	946	2.12
	0.8	3556	976	2.19
	1.0	3525	1010	2.26
	1.2	3415	1037	2.32
	1.4	3300	1069	2.39
T10	1.6	3146	1108	2.48
	1.8	2969	1139	2.55
	2.0	2802	1175	2.63
	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	3653	1072	2.68
T10	1.4	3550	1101	2.75
	1.6	3452	1131	2.83
	1.8	3353	1163	2.91
	2.0	3247	1196	2.99

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	-	-	-
	0.4	-	-	-
	0.6	2828	733	0.98
	0.8	2651	782	1.05
	1.0	2466	825	1.11
	1.2	2253	882	1.18
	1.4	2038	946	1.27
	1.6	1869	991	1.33
	1.8	1668	1038	1.39
T8	2.0	1495	1074	1.44
	0.2	3601	706	1.19
	0.4	3495	736	1.24
	0.6	3363	780	1.32
	0.8	3221	822	1.39
	1.0	3086	866	1.46
	1.2	2932	912	1.54
	1.4	2780	969	1.63
	1.6	2594	1008	1.70
T9	1.8	2408	1058	1.78
	2.0	2247	1094	1.85
	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	3833	930	2.08
	1.2	3735	960	2.15
	1.4	3629	1005	2.25
T10	1.6	3503	1036	2.32
	1.8	3358	1089	2.44
	2.0	3229	1125	2.52
	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	3659	998	2.50
	1.2	3638	1008	2.52
T10	1.4	3585	1022	2.56
	1.6	3500	1052	2.63
	1.8	3382	1091	2.73
	2.0	3286	1124	2.81

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

7.5 Ton • 180 MBH Gas Heat Exchanger • Standard Static Direct Drive

Models: DHG0903DM, DHG0904DM, DHG0907DM

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	1954	552	0.40
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	2589	629	0.67
	0.4	2410	681	0.73
	0.6	2216	734	0.79
	0.8	2038	782	0.84
T3	0.2	3017	730	1.06
	0.4	2897	773	1.13
	0.6	2760	818	1.19
	0.8	2633	859	1.25
T4	0.2	3251	774	1.26
	0.4	3095	813	1.33
	0.6	2954	853	1.39
	0.8	2827	893	1.46
T5	0.2	3417	815	1.47
	0.4	3274	846	1.53
	0.6	3126	887	1.60
	0.8	2988	923	1.66
T6**	0.2	1416	213	0.21
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T7**	0.2	1975	554	0.41
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T8	0.2	2156	579	0.54
	0.4	1956	637	0.59
	0.6	-	-	-
	0.8	-	-	-
T9	0.2	2936	677	0.87
	0.4	2756	724	0.93
	0.6	2586	773	0.99
	0.8	-	-	-
T10	0.2	3427	756	1.24
	0.4	3236	797	1.31
	0.6	3084	838	1.38
	0.8	2955	877	1.44

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2030	500	0.36
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	2675	594	0.64
	0.4	2487	642	0.69
	0.6	2336	698	0.75
	0.8	2089	777	0.83
T3	0.2	3161	679	0.99
	0.4	3068	713	1.04
	0.6	2899	768	1.12
	0.8	2776	809	1.18
T4	0.2	3413	704	1.15
	0.4	3244	742	1.21
	0.6	3108	785	1.28
	0.8	2963	823	1.34
T5	0.2	3563	693	1.25
	0.4	3526	771	1.39
	0.6	3402	814	1.47
	0.8	3317	858	1.55
T6**	0.2	1604	448	0.25
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T7**	0.2	2056	505	0.37
	0.4	1832	582	0.43
	0.6	-	-	-
	0.8	-	-	-
T8	0.2	2434	558	0.52
	0.4	2251	616	0.57
	0.6	-	-	-
	0.8	-	-	-
T9	0.2	2975	642	0.83
	0.4	2799	680	0.88
	0.6	2585	734	0.94
	0.8	-	-	-
T10	0.2	3413	704	1.15
	0.4	3244	742	1.21
	0.6	3108	785	1.28
	0.8	2963	823	1.34

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

7.5 Ton • 180 MBH Gas Heat Exchanger • Medium Static Direct Drive

Models: DHG0903LM, DHG0904LM, DHG0907LM

DOWN FLOW					HORIZONTAL FLOW					
SPEED TAP	ESP	CFM	RPM	BHP	SPEED TAP	ESP	CFM	RPM	BHP	
T1**	0.2	1954	552	0.40	T1**	0.2	2030	500	0.36	
	0.4	-	-	-		0.4	-	-	-	-
	0.6	-	-	-		0.6	-	-	-	-
	0.8	-	-	-		0.8	-	-	-	-
	1.0	-	-	-		1.0	-	-	-	-
	1.2	-	-	-		1.2	-	-	-	-
	1.4	-	-	-		1.4	-	-	-	-
T2**	0.2	2908	718	0.98	T2**	0.2	3067	653	0.89	
	0.4	2754	759	1.04		0.4	2922	693	0.95	
	0.6	2608	806	1.10		0.6	2711	750	1.03	
	0.8	2473	845	1.16		0.8	2551	794	1.09	
	1.0	2322	892	1.22		1.0	2396	837	1.15	
	1.2	2105	945	1.29		1.2	2121	908	1.24	
	1.4	1941	996	1.36		1.4	1872	971	1.33	
T3	0.2	3017	730	1.06	T3	0.2	3161	679	0.99	
	0.4	2897	773	1.13		0.4	3068	713	1.04	
	0.6	2760	818	1.19		0.6	2899	768	1.12	
	0.8	2633	859	1.25		0.8	2776	809	1.18	
	1.0	2499	900	1.31		1.0	2647	851	1.24	
	1.2	2280	957	1.40		1.2	2405	922	1.35	
	1.4	-	-	-		1.4	-	-	-	-
T4	0.2	3629	851	1.72	T4	0.2	-	-	-	
	0.4	3548	882	1.79		0.4	3730	803	1.62	
	0.6	3484	917	1.86		0.6	3644	845	1.71	
	0.8	3375	955	1.93		0.8	3566	881	1.78	
	1.0	3293	989	2.00		1.0	3473	921	1.86	
	1.2	3185	1020	2.06		1.2	3374	946	1.91	
	1.4	3102	1056	2.14		1.4	3289	996	2.02	
T5	0.2	3765	876	1.89	T5	0.2	-	-	-	
	0.4	3676	902	1.94		0.4	-	-	-	
	0.6	3614	937	2.02		0.6	3776	862	1.86	
	0.8	3386	980	2.11		0.8	3699	898	1.94	
	1.0	3274	1020	2.19		1.0	3616	938	2.02	
	1.2	3153	1049	2.25		1.2	3502	964	2.08	
	1.4	3035	1078	2.32		1.4	3440	1011	2.18	
T6**	0.2	2730	647	0.75	T6**	0.2	2782	575	0.63	
	0.4	2551	698	0.81		0.4	2589	631	0.69	
	0.6	2367	749	0.87		0.6	2376	699	0.76	
	0.8	2195	796	0.92		0.8	2187	753	0.82	
	1.0	2113	836	0.97		1.0	1946	796	0.87	
	1.2	1891	894	1.03		1.2	-	-	-	-
	1.4	-	-	-		1.4	-	-	-	-
T7**	0.2	3108	758	1.17	T7**	0.2	3284	678	1.05	
	0.4	3019	797	1.23		0.4	3187	726	1.12	
	0.6	2932	835	1.29		0.6	3081	772	1.19	
	0.8	2818	876	1.36		0.8	2988	814	1.26	
	1.0	2696	916	1.42		1.0	2876	857	1.32	
	1.2	2538	949	1.47		1.2	2770	907	1.40	
	1.4	2378	995	1.54		1.4	2660	936	1.45	
T8	0.2	3541	835	1.62	T8	0.2	3730	746	1.44	
	0.4	3458	868	1.68		0.4	3640	790	1.53	
	0.6	3391	903	1.75		0.6	3549	833	1.61	
	0.8	3282	941	1.82		0.8	3470	869	1.68	
	1.0	3195	976	1.89		1.0	3372	909	1.76	
	1.2	3078	1007	1.95		1.2	3288	935	1.81	
	1.4	2985	1044	2.02		1.4	3183	986	1.91	
T9	0.2	3712	865	1.83	T9	0.2	3902	774	1.63	
	0.4	3634	896	1.89		0.4	3813	815	1.72	
	0.6	3571	930	1.96		0.6	3732	857	1.81	
	0.8	3463	968	2.04		0.8	3655	893	1.88	
	1.0	3384	1002	2.12		1.0	3569	932	1.97	
	1.2	3284	1033	2.18		1.2	3458	958	2.02	
	1.4	3210	1067	2.25		1.4	3391	1006	2.12	
T10	0.2	3869	893	2.04	T10	0.2	4056	799	1.83	
	0.4	3795	921	2.11		0.4	3968	839	1.92	
	0.6	3736	956	2.18		0.6	3899	879	2.01	
	0.8	3628	994	2.27		0.8	3821	915	2.09	
	1.0	3552	1029	2.35		1.0	3751	955	2.18	
	1.2	3468	1058	2.42		1.2	3643	984	2.25	
	1.4	3405	1089	2.49		1.4	3582	1025	2.34	

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

7.5 Ton • 180 MBH Gas Heat Exchanger • High Static Direct Drive

Models: DHG0903WM, DHG0904WM, DHG0907WM

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	1954	552	0.40
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-
T2**	0.2	3316	796	1.37
	0.4	3230	831	1.43
	0.6	3153	868	1.50
	0.8	3042	907	1.57
	1.0	2939	943	1.63
	1.2	2800	976	1.68
	1.4	2676	1017	1.76
	1.6	2500	1044	1.80
	1.8	2336	1113	1.92
	2.0	2209	1162	2.01
T3	0.2	3017	730	1.06
	0.4	2897	773	1.13
	0.6	2760	818	1.19
	0.8	2633	859	1.25
	1.0	2499	900	1.31
	1.2	2280	957	1.40
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-
T4	0.2	-	-	-
	0.4	-	-	-
	0.6	3767	961	2.23
	0.8	3660	1000	2.32
	1.0	3496	1042	2.42
	1.2	3398	1073	2.49
	1.4	3293	1099	2.55
	1.6	3065	1137	2.64
	1.8	2958	1163	2.70
	2.0	2810	1208	2.80
T5	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	3728	1062	2.66
	1.2	3662	1090	2.73
	1.4	3602	1116	2.79
	1.6	3523	1145	2.86
	1.8	3416	1188	2.97
	2.0	3317	1217	3.04
T6**	0.2	2792	701	0.91
	0.4	2699	745	0.97
	0.6	2597	786	1.02
	0.8	2478	831	1.08
	1.0	2319	878	1.14
	1.2	2112	912	1.18
	1.4	1921	957	1.24
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2030	500	0.36
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-
T2**	0.2	3316	796	1.23
	0.4	3544	743	1.28
	0.6	3415	786	1.36
	0.8	3278	827	1.43
	1.0	3147	870	1.50
	1.2	2998	915	1.58
	1.4	2852	971	1.68
	1.6	2666	1010	1.74
	1.8	2482	1060	1.83
	2.0	2323	1096	1.89
T3	0.2	3161	679	0.99
	0.4	3068	713	1.04
	0.6	2899	768	1.12
	0.8	2776	809	1.18
	1.0	2647	851	1.24
	1.2	2405	922	1.35
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-
T4	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	3786	959	2.23
	1.2	3674	995	2.31
	1.4	3566	1035	2.40
	1.6	3459	1067	2.48
	1.8	3361	1097	2.55
	2.0	3261	1134	2.63
T5	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	3795	1047	2.62
	1.6	3706	1077	2.69
	1.8	3641	1114	2.79
	2.0	3565	1145	2.86
T6**	0.2	2957	628	0.82
	0.4	2854	681	0.89
	0.6	2743	730	0.95
	0.8	2634	776	1.01
	1.0	2523	823	1.07
	1.2	2193	915	1.19
	1.4	1969	950	1.23
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

7.5 Ton • 180 MBH Gas Heat Exchanger • High Static Direct Drive

Models: DHG0903WM, DHG0904WM, DHG0907WM

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	3464	822	1.53
	0.4	3380	855	1.59
	0.6	3309	891	1.66
	0.8	3200	929	1.73
	1.0	3108	964	1.80
	1.2	2984	996	1.85
	1.4	2881	1035	1.93
	1.6	2717	1062	1.98
	1.8	2550	1130	2.10
	2.0	2357	1171	2.18
T8	0.2	3983	912	2.21
	0.4	3912	940	2.28
	0.6	3855	974	2.36
	0.8	3748	1014	2.46
	1.0	3671	1051	2.55
	1.2	3598	1079	2.62
	1.4	3538	1107	2.68
	1.6	3446	1136	2.75
	1.8	3326	1183	2.87
	2.0	3210	1213	2.94
T9	0.2	4119	935	2.44
	0.4	4054	962	2.51
	0.6	3998	997	2.60
	0.8	3890	1039	2.71
	1.0	3806	1079	2.82
	1.2	3747	1106	2.89
	1.4	3686	1130	2.95
	1.6	3625	1160	3.03
	1.8	3541	1195	3.12
	2.0	3456	1222	3.19
T10	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	4156	1104	3.08
	1.2	4032	1128	3.14
	1.4	3908	1151	3.21
	1.6	3784	1175	3.27
	1.8	3660	1198	3.34
	2.0	3536	1222	3.40

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	3652	734	1.37
	0.4	3562	778	1.45
	0.6	3467	822	1.53
	0.8	3386	859	1.60
	1.0	3284	899	1.67
	1.2	3212	927	1.73
	1.4	3090	977	1.82
	1.6	2966	1013	1.89
	1.8	2649	1112	2.07
	2.0	2521	1147	2.14
T8	0.2	4167	817	1.98
	0.4	4077	857	2.08
	0.6	4019	895	2.17
	0.8	3939	931	2.26
	1.0	3885	973	2.36
	1.2	3827	1008	2.44
	1.4	3723	1040	2.52
	1.6	3622	1070	2.59
	1.8	3569	1108	2.69
	2.0	3472	1139	2.76
T9	0.2	4296	839	2.19
	0.4	4205	878	2.29
	0.6	4163	915	2.39
	0.8	4077	952	2.49
	1.0	4047	996	2.60
	1.2	3954	1041	2.72
	1.4	3894	1058	2.76
	1.6	3827	1088	2.84
	1.8	3735	1123	2.93
	2.0	3680	1154	3.01
T10	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	4040	1074	2.99
	1.6	4023	1106	3.08
	1.8	3859	1138	3.17
	2.0	3812	1167	3.25

shaded speed tap - Gas heating airflow.

** (T1) (T2) and (T6)(T7) are part load only.

7.5 Ton • 225 MBH Gas Heat Exchanger • Standard Static Direct Drive

Models: DHG0903DH, DHG0904DH, DHG0907DH

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	1954	552	0.40
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	2589	629	0.67
	0.4	2410	681	0.73
	0.6	2216	734	0.79
	0.8	2038	782	0.84
T3	0.2	3194	716	1.05
	0.4	3010	760	1.11
	0.6	2852	805	1.18
	0.8	2705	847	1.24
T4	0.2	3413	753	1.23
	0.4	3222	794	1.29
	0.6	3070	836	1.36
	0.8	2940	875	1.43
T5	0.2	3622	793	1.43
	0.4	3422	830	1.50
	0.6	3268	868	1.57
	0.8	3160	904	1.64
T6**	0.2	2098	568	0.45
	0.4	1913	626	0.50
	0.6	-	-	-
	0.8	-	-	-
T7**	0.2	2625	633	0.69
	0.4	2446	685	0.75
	0.6	2255	738	0.81
	0.8	2079	786	0.86
T8	0.2	3081	698	0.97
	0.4	2900	744	1.03
	0.6	2737	791	1.09
	0.8	2582	834	1.15
T9	0.2	3263	728	1.10
	0.4	3078	771	1.17
	0.6	2923	815	1.23
	0.8	2780	856	1.30
T10	0.2	3427	756	1.24
	0.4	3236	797	1.31
	0.6	3084	838	1.38
	0.8	2955	877	1.44

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2102	495	0.36
	0.4	1906	566	0.41
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	2748	571	0.61
	0.4	2554	627	0.67
	0.6	2337	697	0.75
	0.8	2148	750	0.80
T3	0.2	3336	657	0.96
	0.4	3185	696	1.02
	0.6	3029	750	1.10
	0.8	2862	796	1.17
T4	0.2	3539	693	1.13
	0.4	3419	726	1.18
	0.6	3282	773	1.26
	0.8	3132	816	1.33
T5	0.2	3724	732	1.32
	0.4	3647	757	1.37
	0.6	3525	797	1.44
	0.8	3401	836	1.51
T6**	0.2	2251	512	0.41
	0.4	2052	579	0.46
	0.6	-	-	-
	0.8	-	-	-
T7**	0.2	2784	576	0.63
	0.4	2591	631	0.69
	0.6	2379	699	0.76
	0.8	2190	753	0.82
T8	0.2	3230	639	0.88
	0.4	3066	682	0.94
	0.6	2900	739	1.02
	0.8	2726	787	1.09
T9	0.2	3401	668	1.01
	0.4	3259	705	1.07
	0.6	3109	757	1.15
	0.8	2947	802	1.22
T10	0.2	3552	696	1.14
	0.4	3435	728	1.20
	0.6	3299	774	1.27
	0.8	3151	817	1.34

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

7.5 Ton • 225 MBH Gas Heat Exchanger • Medium Static Direct Drive
 Models: DHG0903LH, DHG0904LH, DHG0907LH

DOWN FLOW					HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP	SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	1954	552	0.40	T1**	0.2	2102	495	0.36
	0.4	-	-	-		0.4	1906	566	0.41
	0.6	-	-	-		0.6	-	-	-
	0.8	-	-	-		0.8	-	-	-
	1.0	-	-	-		1.0	-	-	-
	1.2	-	-	-		1.2	-	-	-
	1.4	-	-	-		1.4	-	-	-
T2**	0.2	3059	695	0.95	T2**	0.2	3208	636	0.87
	0.4	2877	741	1.01		0.4	3043	680	0.93
	0.6	2714	788	1.08		0.6	2874	737	1.01
	0.8	2558	831	1.14		0.8	2699	785	1.07
	1.0	2412	870	1.19		1.0	2519	829	1.13
	1.2	2218	922	1.26		1.2	2312	884	1.21
	1.4	2028	965	1.32		1.4	2103	948	1.30
T3	0.2	3194	716	1.05	T3	0.2	3336	657	0.96
	0.4	3010	760	1.11		0.4	3185	696	1.02
	0.6	2852	805	1.18		0.6	3029	750	1.10
	0.8	2705	847	1.24		0.8	2862	796	1.17
	1.0	2542	885	1.30		1.0	2699	840	1.23
	1.2	2360	934	1.37		1.2	2509	893	1.31
	1.4	-	-	-		1.4	2320	954	1.40
T4	0.2	-	-	-	T4	0.2	-	-	-
	0.4	3622	874	1.77		0.4	-	-	-
	0.6	3458	907	1.83		0.6	-	-	-
	0.8	3380	940	1.90		0.8	3693	861	1.74
	1.0	3265	975	1.97		1.0	3575	905	1.83
	1.2	3138	1008	2.04		1.2	3461	941	1.90
	1.4	2994	1043	2.11		1.4	3345	991	2.00
T5	0.2	-	-	-	T5	0.2	-	-	-
	0.4	3725	901	1.94		0.4	-	-	-
	0.6	3549	931	2.00		0.6	-	-	-
	0.8	3492	961	2.07		0.8	-	-	-
	1.0	3423	996	2.15		1.0	3737	920	1.98
	1.2	3307	1026	2.21		1.2	3633	952	2.05
	1.4	3180	1059	2.28		1.4	3524	999	2.15
T6**	0.2	2231	516	0.50	T6**	0.2	2410	585	0.57
	0.4	2028	649	0.63		0.4	2385	610	0.59
	0.6	1835	696	0.68		0.6	2243	664	0.65
	0.8	-	-	-		0.8	1983	748	0.73
	1.0	-	-	-		1.0	-	-	-
	1.2	-	-	-		1.2	-	-	-
	1.4	-	-	-		1.4	-	-	-
T7**	0.2	2987	684	0.90	T7**	0.2	3139	625	0.83
	0.4	2806	731	0.96		0.4	2967	671	0.89
	0.6	2639	779	1.03		0.6	2791	730	0.96
	0.8	2479	823	1.09		0.8	2613	779	1.03
	1.0	2344	862	1.14		1.0	2424	823	1.09
	1.2	2144	915	1.21		1.2	2207	880	1.16
	1.4	1953	959	1.27		1.4	1987	944	1.25
T8	0.2	3456	761	1.27	T8	0.2	3578	701	1.17
	0.4	3264	801	1.34		0.4	3467	732	1.22
	0.6	3112	842	1.40		0.6	3333	778	1.30
	0.8	2986	881	1.47		0.8	3188	820	1.37
	1.0	2812	918	1.53		1.0	3051	863	1.44
	1.2	2652	961	1.60		1.2	2894	910	1.52
	1.4	2476	1001	1.67		1.4	2739	967	1.61
T9	0.2	3569	838	1.66	T9	0.2	3868	769	1.52
	0.4	3500	874	1.73		0.4	3839	787	1.55
	0.6	3434	910	1.80		0.6	3727	820	1.62
	0.8	3325	947	1.87		0.8	3631	856	1.69
	1.0	3240	982	1.94		1.0	3513	900	1.78
	1.2	3128	1013	2.00		1.2	3394	937	1.85
	1.4	3040	1049	2.07		1.4	3274	987	1.95
T10	0.2	3893	882	1.99	T10	0.2	4122	792	1.79
	0.4	3766	916	2.07		0.4	4001	828	1.87
	0.6	3687	945	2.14		0.6	3881	865	1.96
	0.8	3584	977	2.21		0.8	3800	910	2.06
	1.0	3501	1006	2.28		1.0	3594	930	2.10
	1.2	3392	1042	2.36		1.2	3519	974	2.20
	1.4	3289	1068	2.42		1.4	3391	1007	2.28

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

7.5 Ton • 225 MBH Gas Heat Exchanger • High Static Direct Drive

Models: DHG0903WH, DHG0904WH, DHG0907WH

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	1954	552	0.40
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T2**	0.2	3527	774	1.34
	0.4	3332	814	1.40
	0.6	3180	853	1.47
	0.8	3061	891	1.54
	1.0	2889	927	1.60
	1.2	2735	969	1.67
	1.4	2563	1008	1.74
	1.6	2392	1050	1.81
	1.8	2237	1086	1.87
2.0	2077	1119	1.93	
T3	0.2	3194	716	1.05
	0.4	3010	760	1.11
	0.6	2852	805	1.18
	0.8	2705	847	1.24
	1.0	2542	885	1.30
	1.2	2360	934	1.37
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T4	0.2	-	-	-
	0.4	-	-	-
	0.6	3769	961	2.22
	0.8	3645	1000	2.32
	1.0	3496	1042	2.42
	1.2	3398	1073	2.49
	1.4	3293	1099	2.55
	1.6	3065	1137	2.64
	1.8	2958	1163	2.70
2.0	2810	1208	2.80	
T5	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	3754	1063	2.66
	1.2	3662	1090	2.73
	1.4	3578	1115	2.80
	1.6	3519	1137	2.84
	1.8	3325	1166	2.91
2.0	3161	1203	3.01	
T6**	0.2	2569	626	0.66
	0.4	2389	678	0.72
	0.6	2194	732	0.78
	0.8	2015	780	0.83
	1.0	1974	821	0.87
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2102	495	0.36
	0.4	1906	566	0.41
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T2**	0.2	3642	714	1.23
	0.4	3544	743	1.28
	0.6	3415	786	1.36
	0.8	3278	827	1.43
	1.0	3147	870	1.50
	1.2	2998	915	1.58
	1.4	2852	971	1.68
	1.6	2666	1010	1.74
	1.8	2482	1060	1.83
2.0	2323	1096	1.89	
T3	0.2	3336	657	0.96
	0.4	3185	696	1.02
	0.6	3029	750	1.10
	0.8	2862	796	1.17
	1.0	2699	840	1.23
	1.2	2509	893	1.31
	1.4	2320	954	1.40
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T4	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	3674	995	2.31
	1.4	3566	1035	2.40
	1.6	3459	1067	2.48
	1.8	3361	1097	2.55
2.0	3261	1134	2.63	
T5	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	3795	1047	2.62
	1.6	3706	1077	2.69
	1.8	3641	1114	2.79
2.0	3565	1145	2.86	
T6**	0.2	2728	568	0.60
	0.4	2533	625	0.66
	0.6	2314	695	0.74
	0.8	2125	749	0.79
	1.0	1875	792	0.84
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

7.5 Ton • 225 MBH Gas Heat Exchanger • High Static Direct Drive
 Models: DHG0903WH, DHG0904WH, DHG0907WH

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	-	-	-
	0.4	3048	766	1.14
	0.6	2892	811	1.21
	0.8	2747	852	1.27
	1.0	2581	890	1.33
	1.2	2402	938	1.40
	1.4	2216	980	1.46
	1.6	2043	1023	1.53
	1.8	1893	1062	1.58
	2.0	-	-	-
T8	0.2	3744	819	1.58
	0.4	3536	854	1.64
	0.6	3378	889	1.71
	0.8	3286	924	1.78
	1.0	3144	960	1.85
	1.2	3009	995	1.92
	1.4	2855	1031	1.99
	1.6	2687	1072	2.06
	1.8	2526	1107	2.13
	2.0	-	-	-
T9	0.2	3998	907	2.14
	0.4	3905	939	2.22
	0.6	3812	972	2.29
	0.8	3693	1005	2.37
	1.0	3617	1041	2.46
	1.2	3539	1069	2.52
	1.4	3478	1098	2.59
	1.6	3376	1127	2.66
	1.8	3271	1162	2.74
	2.0	3111	1208	2.85
T10	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	4156	1104	3.08
	1.2	4032	1128	3.14
	1.4	3908	1151	3.21
	1.6	3784	1175	3.27
	1.8	3660	1198	3.34
	2.0	3536	1222	3.40

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	-	-	-
	0.4	-	-	-
	0.6	3074	754	1.13
	0.8	2910	800	1.19
	1.0	2751	843	1.26
	1.2	2566	895	1.34
	1.4	2382	956	1.43
	1.6	2200	998	1.49
	1.8	2005	1047	1.56
	2.0	1836	1083	1.62
T8	0.2	3828	758	1.46
	0.4	3784	778	1.50
	0.6	3669	813	1.57
	0.8	3564	850	1.64
	1.0	3444	894	1.72
	1.2	3320	933	1.80
	1.4	3197	984	1.89
	1.6	3023	1020	1.96
	1.8	2852	1071	2.06
	2.0	2703	1107	2.13
T9	0.2	-	-	-
	0.4	-	-	-
	0.6	4100	872	2.06
	0.8	4086	901	2.12
	1.0	3955	944	2.23
	1.2	3864	970	2.29
	1.4	3758	1013	2.39
	1.6	3659	1042	2.46
	1.8	3525	1096	2.59
	2.0	3406	1132	2.67
T10	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	4040	1074	2.99
	1.6	4023	1106	3.08
	1.8	3859	1138	3.17
	2.0	3812	1167	3.25

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

8.5 Ton • 130 MBH Gas Heat Exchanger • Standard Static Direct Drive
 Models: DHG1023DL, DHG1024DL, DHG1027DL

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	1714	496	0.32
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	2365	599	0.61
	0.4	2208	649	0.66
	0.6	2048	695	0.70
	0.8	-	-	-
T3	0.2	2798	671	0.88
	0.4	2687	713	0.93
	0.6	-	-	-
	0.8	-	-	-
T4	0.2	3522	795	1.51
	0.4	3389	828	1.58
	0.6	3240	865	1.65
	0.8	3083	898	1.71
T5	0.2	3830	847	1.83
	0.4	3702	881	1.90
	0.6	3563	915	1.97
	0.8	3399	946	2.04
T6**	0.2	1889	528	0.38
	0.4	1827	589	0.43
	0.6	1445	667	0.48
	0.8	-	-	-
T7**	0.2	2193	571	0.53
	0.4	2090	635	0.59
	0.6	1959	698	0.64
	0.8	1704	763	0.70
T8	0.2	2489	616	0.69
	0.4	2351	679	0.76
	0.6	2235	729	0.82
	0.8	2050	780	0.87
T9	0.2	2860	679	0.94
	0.4	2699	735	1.02
	0.6	2554	774	1.07
	0.8	2446	817	1.13
T10	0.2	3182	743	1.22
	0.4	3041	788	1.30
	0.6	2953	821	1.35
	0.8	2797	868	1.43

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	1856	423	0.27
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	2671	503	0.51
	0.4	2492	568	0.57
	0.6	2335	628	0.64
	0.8	2027	690	0.70
T3	0.2	3144	564	0.74
	0.4	3005	607	0.79
	0.6	2824	671	0.88
	0.8	2661	722	0.95
T4	0.2	3921	655	1.25
	0.4	3775	700	1.33
	0.6	3630	745	1.42
	0.8	3449	786	1.50
T5	0.2	4210	694	1.49
	0.4	4071	737	1.59
	0.6	3942	777	1.67
	0.8	3746	819	1.76
T6**	0.2	2056	443	0.32
	0.4	1887	522	0.38
	0.6	1702	591	0.43
	0.8	1327	707	0.51
T7**	0.2	2445	487	0.45
	0.4	2283	556	0.51
	0.6	2098	617	0.57
	0.8	1828	688	0.64
T8	0.2	2760	545	0.61
	0.4	2630	587	0.66
	0.6	2487	641	0.72
	0.8	2264	701	0.79
T9	0.2	3234	581	0.80
	0.4	3043	626	0.87
	0.6	2866	675	0.93
	0.8	2677	729	1.01
T10	0.2	3655	604	0.99
	0.4	3427	663	1.09
	0.6	3210	714	1.17
	0.8	3066	759	1.25

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

8.5 Ton • 130 MBH Gas Heat Exchanger • Medium Static Direct Drive
Models: DHG1023LL, DHG1024LL, DHG1027LL

DOWN FLOW					HORIZONTAL FLOW					
SPEED TAP	ESP	CFM	RPM	BHP	SPEED TAP	ESP	CFM	RPM	BHP	
T1**	0.2	1714	496	0.32	T1**	0.2	1856	423	0.27	
	0.4	-	-	-		0.4	-	-	-	-
	0.6	-	-	-		0.6	-	-	-	-
	0.8	-	-	-		0.8	-	-	-	-
	1.0	-	-	-		1.0	-	-	-	-
	1.2	-	-	-		1.2	-	-	-	-
T2**	0.2	3114	722	1.12	T2**	0.2	3458	603	0.93	
	0.4	2977	761	1.18		0.4	3292	658	1.02	
	0.6	2825	800	1.24		0.6	3155	700	1.08	
	0.8	2634	846	1.31		0.8	3007	747	1.16	
	1.0	2474	878	1.36		1.0	2844	797	1.23	
	1.2	2236	931	1.44		1.2	2681	836	1.29	
T3	0.2	2798	671	0.88	T3	0.2	3144	564	0.74	
	0.4	2687	713	0.93		0.4	3005	607	0.79	
	0.6	-	-	-		0.6	2824	671	0.88	
	0.8	-	-	-		0.8	2661	722	0.95	
	1.0	-	-	-		1.0	-	-	-	
	1.2	-	-	-		1.2	-	-	-	
T4	0.2	3997	874	1.99	T4	0.2	-	-	-	
	0.4	3869	909	2.07		0.4	4200	754	1.71	
	0.6	3740	942	2.14		0.6	4070	791	1.80	
	0.8	3578	975	2.22		0.8	3879	838	1.91	
	1.0	3417	1009	2.29		1.0	3699	874	1.99	
	1.2	3257	1039	2.36		1.2	3535	923	2.10	
T5	0.2	4125	958	2.46	T5	0.2	-	-	-	
	0.4	3997	992	2.55		0.4	-	-	-	
	0.6	3806	1021	2.63		0.6	-	-	-	
	0.8	3701	1056	2.72		0.8	4194	863	2.22	
	1.0	3547	1081	2.78		1.0	4012	898	2.31	
	1.2	3374	1101	2.83		1.2	3879	955	2.45	
T6**	0.2	1863	520	0.37	T6**	0.2	2029	440	0.31	
	0.4	1748	587	0.42		0.4	1855	519	0.37	
	0.6	1403	671	0.48		0.6	1666	593	0.42	
	0.8	-	-	-		0.8	-	-	-	
	1.0	-	-	-		1.0	-	-	-	
	1.2	-	-	-		1.2	-	-	-	
T7**	0.2	2398	602	0.64	T7**	0.2	2645	528	0.56	
	0.4	2270	665	0.70		0.4	2515	577	0.61	
	0.6	2161	719	0.76		0.6	2360	634	0.67	
	0.8	1948	774	0.82		0.8	2137	694	0.74	
	1.0	1818	821	0.87		1.0	1801	757	0.80	
	1.2	1520	901	0.95		1.2	1532	814	0.86	
T8	0.2	2398	602	0.64	T8	0.2	2645	528	0.56	
	0.4	2270	665	0.70		0.4	2515	577	0.61	
	0.6	2161	719	0.76		0.6	2360	634	0.67	
	0.8	1948	774	0.82		0.8	2137	694	0.74	
	1.0	1818	821	0.87		1.0	1801	757	0.80	
	1.2	-	-	-		1.2	-	-	-	
T9	0.2	3203	753	1.25	T9	0.2	3664	603	1.01	
	0.4	3097	795	1.32		0.4	3429	666	1.11	
	0.6	2992	833	1.39		0.6	3240	718	1.20	
	0.8	2871	874	1.46		0.8	3088	761	1.27	
	1.0	2716	917	1.53		1.0	2883	808	1.35	
	1.2	2580	951	1.59		1.2	2651	857	1.43	
T10	0.2	3879	753	1.72	T10	0.2	-	-	-	
	0.4	3777	802	1.83		0.4	-	-	-	
	0.6	3658	923	2.11		0.6	-	-	-	
	0.8	3532	980	2.24		0.8	-	-	-	
	1.0	3416	1008	2.30		1.0	3711	872	1.99	
	1.2	3280	1038	2.37		1.2	3501	907	2.07	
	1.4	3152	1071	2.45	1.4	2986	951	2.17		

shaded speed tap - Gas heating airflow.
**(T1) (T2) and (T6)(T7) are part load only.

8.5 Ton • 130 MBH Gas Heat Exchanger • High Static Direct Drive
 Models: DHG1023WL, DHG1024WL, DHG1027WL

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	1714	496	0.32
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T2**	0.2	3674	820	1.66
	0.4	3544	853	1.73
	0.6	3402	889	1.80
	0.8	3235	920	1.86
	1.0	3055	956	1.94
	1.2	2891	986	2.00
	1.4	2708	1011	2.05
	1.6	2499	1071	2.17
	1.8	2307	1103	2.23
2.0	2054	1146	2.32	
T3	0.2	2798	671	0.88
	0.4	2687	713	0.93
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T4	0.2	4166	907	2.22
	0.4	4029	939	2.30
	0.6	3906	969	2.37
	0.8	3717	1003	2.45
	1.0	3544	1037	2.54
	1.2	3394	1064	2.60
	1.4	3219	1092	2.67
	1.6	3060	1121	2.74
	1.8	2887	1148	2.81
2.0	2721	1176	2.88	
T5	0.2	-	-	-
	0.4	-	-	-
	0.6	4221	1022	2.85
	0.8	4047	1052	2.93
	1.0	3889	1084	3.02
	1.2	3734	1109	3.09
	1.4	3555	1133	3.16
	1.6	3396	1162	3.24
	1.8	3210	1186	3.30
2.0	3041	1211	3.37	
T6**	0.2	2398	602	0.64
	0.4	2270	665	0.70
	0.6	2161	719	0.76
	0.8	1948	774	0.82
	1.0	1818	821	0.87
	1.2	1520	901	0.95
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	1856	423	0.27
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T2**	0.2	4061	675	1.37
	0.4	3919	720	1.46
	0.6	3792	761	1.54
	0.8	3610	802	1.62
	1.0	3427	845	1.71
	1.2	3261	894	1.81
	1.4	3042	919	1.86
	1.6	2865	962	1.95
	1.8	2649	1020	2.06
2.0	2487	1041	2.11	
T3	0.2	3144	564	0.74
	0.4	3005	607	0.79
	0.6	2824	671	0.88
	0.8	2661	722	0.95
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T4	0.2	-	-	-
	0.4	-	-	-
	0.6	4261	812	1.99
	0.8	4051	849	2.08
	1.0	3857	885	2.17
	1.2	3718	922	2.25
	1.4	3536	957	2.34
	1.6	3369	993	2.43
	1.8	3199	1028	2.52
2.0	3048	1064	2.60	
T5	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	4145	950	2.65
	1.4	3925	986	2.75
	1.6	3783	1018	2.84
	1.8	3606	1051	2.93
2.0	3415	1085	3.02	
T6**	0.2	2645	528	0.56
	0.4	2515	577	0.61
	0.6	2360	634	0.67
	0.8	2137	694	0.74
	1.0	1801	757	0.80
	1.2	1532	814	0.86
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

8.5 Ton • 130 MBH Gas Heat Exchanger • High Static Direct Drive

Models: DHG1023WL, DHG1024WL, DHG1027WL

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	-	-	-
	0.4	2729	741	1.06
	0.6	2574	789	1.13
	0.8	2447	824	1.18
	1.0	2310	847	1.21
	1.2	2126	857	1.22
	1.4	1858	948	1.35
	1.6	1746	1021	1.46
	1.8	1577	1075	1.54
2.0	1420	1111	1.59	
T8	0.2	2947	695	1.01
	0.4	2787	749	1.09
	0.6	2649	786	1.14
	0.8	2539	829	1.20
	1.0	2287	872	1.26
	1.2	2202	917	1.33
	1.4	1896	972	1.41
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T9	0.2	3704	751	1.59
	0.4	3606	786	1.67
	0.6	3491	903	1.92
	0.8	3366	951	2.02
	1.0	3247	981	2.08
	1.2	3108	1015	2.15
	1.4	2970	1050	2.23
	1.6	2833	1082	2.30
	1.8	2661	1117	2.37
2.0	2477	1179	2.50	
T10	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	3867	1078	3.00
	1.2	3743	1109	3.09
	1.4	3606	1138	3.17
	1.6	3474	1165	3.25
	1.8	3340	1193	3.32
2.0	3204	1219	3.40	

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	2767	734	1.05
	1.0	2539	781	1.12
	1.2	2280	837	1.20
	1.4	2083	892	1.27
	1.6	1834	946	1.35
	1.8	1477	1014	1.45
2.0	-	-	-	
T8	0.2	3354	587	0.85
	0.4	3145	635	0.92
	0.6	2952	685	0.99
	0.8	2776	736	1.07
	1.0	2573	785	1.14
	1.2	2318	840	1.22
	1.4	2119	896	1.30
	1.6	1875	950	1.38
	1.8	-	-	-
2.0	-	-	-	
T9	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	3761	817	1.73
	1.0	3588	854	1.81
	1.2	3342	894	1.90
	1.4	3145	938	1.99
	1.6	2888	981	2.08
	1.8	2688	1022	2.17
2.0	2433	1065	2.26	
T10	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	3767	1022	2.85
	1.8	3581	1060	2.95
2.0	3370	1096	3.05	

shaded speed tap - Gas heating airflow.

** (T1) (T2) and (T6)(T7) are part load only.

8.5 Ton • 180 MBH Gas Heat Exchanger • Standard Static Direct Drive
 Models: DHG1023DM, DHG1024DM, DHG1027DM

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	1902	520	0.37
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	2365	599	0.61
	0.4	2208	649	0.66
	0.6	2048	695	0.70
	0.8	1892	736	0.74
T3	0.2	3026	709	1.06
	0.4	2905	748	1.11
	0.6	2735	788	1.17
	0.8	2593	831	1.24
T4	0.2	3522	795	1.51
	0.4	3389	828	1.58
	0.6	3240	865	1.65
	0.8	3083	898	1.71
T5	0.2	3830	847	1.83
	0.4	3702	881	1.90
	0.6	3563	915	1.97
	0.8	3399	946	2.04
T6**	0.2	1539	469	0.27
	0.4	1317	556	0.31
	0.6	994	634	0.36
	0.8	-	-	-
T7**	0.2	2327	591	0.60
	0.4	2207	655	0.66
	0.6	2098	712	0.72
	0.8	1865	770	0.78
T8	0.2	2266	588	0.56
	0.4	2126	638	0.61
	0.6	1989	694	0.66
	0.8	1747	765	0.73
T9	0.2	2743	658	0.85
	0.4	2585	717	0.93
	0.6	2443	759	0.99
	0.8	-	-	-
T10	0.2	3182	743	1.22
	0.4	3041	788	1.30
	0.6	2953	821	1.35
	0.8	2797	868	1.43

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2029	440	0.31
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	2671	503	0.51
	0.4	2492	568	0.57
	0.6	2335	628	0.64
	0.8	2027	690	0.70
T3	0.2	3391	593	0.88
	0.4	3245	641	0.95
	0.6	3095	693	1.03
	0.8	2948	739	1.10
T4	0.2	3921	655	1.25
	0.4	3775	700	1.33
	0.6	3630	745	1.42
	0.8	3449	786	1.50
T5	0.2	4210	694	1.49
	0.4	4071	737	1.59
	0.6	3942	777	1.67
	0.8	3746	819	1.76
T6**	0.2	1650	405	0.23
	0.4	1369	515	0.29
	0.6	1105	589	0.33
	0.8	-	-	-
T7**	0.2	2571	513	0.52
	0.4	2433	570	0.58
	0.6	2261	630	0.64
	0.8	2042	690	0.70
T8	0.2	2491	493	0.47
	0.4	2318	560	0.53
	0.6	2125	625	0.60
	0.8	1918	683	0.65
T9	0.2	3073	572	0.74
	0.4	2909	613	0.80
	0.6	2751	663	0.86
	0.8	2547	719	0.93
T10	0.2	3655	604	0.99
	0.4	3427	663	1.09
	0.6	3210	714	1.17
	0.8	3066	759	1.25

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

8.5 Ton • 180 MBH Gas Heat Exchanger • Medium Static Direct Drive

Models: DHG1023LM, DHG1024LM, DHG1027LM

DOWN FLOW					HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP	SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	1863	520	0.37	T1**	0.2	2029	440	0.31
	0.4	-	-	-		0.4	1855	519	0.37
	0.6	-	-	-		0.6	-	-	-
	0.8	-	-	-		0.8	-	-	-
	1.0	-	-	-		1.0	-	-	-
	1.2	-	-	-		1.2	-	-	-
	1.4	-	-	-		1.4	-	-	-
T2**	0.2	3114	722	1.12	T2**	0.2	3458	603	0.93
	0.4	2977	761	1.18		0.4	3292	658	1.02
	0.6	2825	800	1.24		0.6	3155	700	1.08
	0.8	2634	846	1.31		0.8	3007	747	1.16
	1.0	2474	878	1.36		1.0	2844	797	1.23
	1.2	2236	931	1.44		1.2	2681	836	1.29
	1.4	1990	986	1.53		1.4	2469	885	1.37
T3	0.2	3026	709	1.06	T3	0.2	3391	593	0.88
	0.4	2905	748	1.11		0.4	3245	641	0.95
	0.6	2735	788	1.17		0.6	3095	693	1.03
	0.8	2593	831	1.24		0.8	2948	739	1.10
	1.0	-	-	-		1.0	2789	789	1.17
	1.2	-	-	-		1.2	2614	847	1.26
	1.4	-	-	-		1.4	-	-	-
T4	0.2	3997	874	1.99	T4	0.2	-	-	-
	0.4	3869	909	2.07		0.4	4200	754	1.71
	0.6	3740	942	2.14		0.6	4070	791	1.80
	0.8	3578	975	2.22		0.8	3879	838	1.91
	1.0	3417	1009	2.29		1.0	3699	874	1.99
	1.2	3257	1039	2.36		1.2	3535	923	2.10
	1.4	3091	1069	2.43		1.4	3341	946	2.15
T5	0.2	-	-	-	T5	0.2	-	-	-
	0.4	4125	958	2.46		0.4	-	-	-
	0.6	3997	992	2.55		0.6	-	-	-
	0.8	3806	1021	2.63		0.8	4194	863	2.22
	1.0	3701	1056	2.72		1.0	4012	898	2.31
	1.2	3547	1081	2.78		1.2	3879	955	2.45
	1.4	3374	1101	2.83		1.4	3683	967	2.49
T6**	0.2	2137	563	0.50	T6**	0.2	2382	479	0.42
	0.4	2041	626	0.56		0.4	2229	549	0.49
	0.6	1888	692	0.61		0.6	2053	611	0.54
	0.8	-	-	-		0.8	-	-	-
	1.0	-	-	-		1.0	-	-	-
	1.2	-	-	-		1.2	-	-	-
	1.4	-	-	-		1.4	-	-	-
T7**	0.2	2948	681	0.97	T7**	0.2	3346	591	0.84
	0.4	2729	741	1.06		0.4	3123	632	0.90
	0.6	2574	789	1.13		0.6	2931	681	0.97
	0.8	2447	824	1.18		0.8	2767	734	1.05
	1.0	2310	847	1.21		1.0	2539	781	1.12
	1.2	2126	857	1.22		1.2	2280	837	1.20
	1.4	1858	948	1.35		1.4	2083	892	1.27
T8	0.2	3256	760	1.30	T8	0.2	3734	613	1.05
	0.4	3128	802	1.37		0.4	3520	673	1.15
	0.6	3059	834	1.42		0.6	3311	723	1.24
	0.8	2885	884	1.51		0.8	3172	767	1.31
	1.0	2779	916	1.6		1.0	2951	811	1.39
	1.2	2619	955	1.63		1.2	2724	859	1.47
	1.4	2449	1000	1.71		1.4	2547	909	1.55
T9	0.2	3571	777	1.55	T9	0.2	3992	669	1.34
	0.4	3475	815	1.63		0.4	3881	710	1.42
	0.6	3364	887	1.77		0.6	3776	756	1.51
	0.8	3239	920	1.84		0.8	3631	804	1.61
	1.0	3115	957	1.91		1.0	3474	841	1.68
	1.2	2974	997	2.00		1.2	3329	884	1.77
	1.4	2825	1031	2.06		1.4	3125	928	1.86
T10	0.2	3879	753	1.72	T10	0.2	4350	708	1.62
	0.4	3777	802	1.83		0.4	4212	747	1.71
	0.6	3658	923	2.11		0.6	4054	789	1.80
	0.8	3532	980	2.24		0.8	3912	834	1.91
	1.0	3416	1008	2.30		1.0	3711	872	1.99
	1.2	3280	1038	2.37		1.2	3501	907	2.07
	1.4	3152	1071	2.45		1.4	2986	951	2.17

shaded speed tap - Gas heating airflow.

** (T1) (T2) and (T6)(T7) are part load only.

8.5 Ton • 180 MBH Gas Heat Exchanger • High Static Direct Drive

Models: DHG1023WM, DHG1024WM, DHG1027WM

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	1863	520	0.37
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-
T2**	0.2	3674	820	1.66
	0.4	3544	853	1.73
	0.6	3402	889	1.80
	0.8	3235	920	1.86
	1.0	3055	956	1.94
	1.2	2891	986	2.00
	1.4	2708	1011	2.05
	1.6	2499	1071	2.17
	1.8	2307	1103	2.23
	2.0	2054	1146	2.32
T3	0.2	3026	709	1.06
	0.4	2905	748	1.11
	0.6	2735	788	1.17
	0.8	2593	831	1.24
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-
T4	0.2	4166	907	2.22
	0.4	4029	939	2.30
	0.6	3906	969	2.37
	0.8	3717	1003	2.45
	1.0	3544	1037	2.54
	1.2	3394	1064	2.60
	1.4	3219	1092	2.67
	1.6	3060	1121	2.74
	1.8	2887	1148	2.81
	2.0	2721	1176	2.88
T5	0.2	-	-	-
	0.4	-	-	-
	0.6	4221	1022	2.85
	0.8	4047	1052	2.93
	1.0	3889	1084	3.02
	1.2	3734	1109	3.09
	1.4	3555	1133	3.16
	1.6	3396	1162	3.24
	1.8	3210	1186	3.30
	2.0	3041	1211	3.37
T6**	0.2	2464	612	0.68
	0.4	2329	675	0.75
	0.6	2215	727	0.80
	0.8	2022	778	0.86
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2029	440	0.31
	0.4	1855	519	0.37
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-
T2**	0.2	4061	675	1.37
	0.4	3919	720	1.46
	0.6	3792	761	1.54
	0.8	3610	802	1.62
	1.0	3427	845	1.71
	1.2	3261	894	1.81
	1.4	3042	919	1.86
	1.6	2865	962	1.95
	1.8	2649	1020	2.06
	2.0	2487	1041	2.11
T3	0.2	3391	593	0.88
	0.4	3245	641	0.95
	0.6	3095	693	1.03
	0.8	2948	739	1.10
	1.0	2789	789	1.17
	1.2	2614	847	1.26
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-
T4	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	4051	849	2.08
	1.0	3857	885	2.17
	1.2	3718	922	2.25
	1.4	3536	957	2.34
	1.6	3369	993	2.43
	1.8	3199	1028	2.52
	2.0	3048	1064	2.60
T5	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	4145	950	2.65
	1.4	3925	986	2.75
	1.6	3783	1018	2.84
	1.8	3606	1051	2.93
	2.0	3415	1085	3.02
T6**	0.2	2719	539	0.60
	0.4	2590	584	0.64
	0.6	2444	638	0.70
	0.8	2221	699	0.77
	1.0	1930	759	0.84
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

8.5 Ton • 180 MBH Gas Heat Exchanger • High Static Direct Drive
 Models: DHG1023WM, DHG1024WM, DHG1027WM

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	3302	768	1.35
	0.4	3209	847	1.49
	0.6	3103	851	1.50
	0.8	2979	886	1.56
	1.0	2840	930	1.64
	1.2	2696	964	1.70
	1.4	2513	1027	1.81
	1.6	2312	1039	1.83
	1.8	2123	1102	1.94
T8	2.0	1895	1155	2.03
	0.2	3392	853	1.57
	0.4	3298	852	1.57
	0.6	3191	864	1.59
	0.8	3066	864	1.59
	1.0	2933	915	1.68
	1.2	2790	975	1.79
	1.4	2620	1002	1.84
	1.6	-	-	-
T9	1.8	-	-	-
	2.0	-	-	-
	0.2	3912	757	1.75
	0.4	3808	816	1.89
	0.6	3689	927	2.15
	0.8	3562	984	2.28
	1.0	3447	1012	2.35
	1.2	3312	1042	2.41
	1.4	3185	1075	2.49
T10	1.6	3063	1106	2.56
	1.8	2903	1126	2.61
	2.0	2773	1181	2.74
	0.2	4380	941	2.62
	0.4	4256	977	2.72
	0.6	4126	1012	2.82
	0.8	3991	1046	2.91
	1.0	3867	1078	3.00
	1.2	3743	1109	3.09
T10	1.4	3606	1138	3.17
	1.6	3474	1165	3.25
	1.8	3340	1193	3.32
	2.0	3204	1219	3.40

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	3734	626	1.10
	0.4	3574	679	1.20
	0.6	3431	729	1.28
	0.8	3283	775	1.37
	1.0	3115	817	1.44
	1.2	2941	865	1.52
	1.4	2747	908	1.60
	1.6	2425	958	1.69
	1.8	2211	1011	1.78
	2.0	1860	1086	1.91
T8	0.2	3835	638	1.17
	0.4	3695	691	1.27
	0.6	3544	739	1.36
	0.8	3402	784	1.44
	1.0	3228	826	1.52
	1.2	3034	870	1.60
	1.4	2840	920	1.69
	1.6	2615	962	1.77
	1.8	-	-	-
	2.0	-	-	-
T9	0.2	4388	712	1.65
	0.4	4245	751	1.74
	0.6	4081	792	1.84
	0.8	3940	837	1.94
	1.0	3734	875	2.03
	1.2	3539	910	2.11
	1.4	3317	953	2.21
	1.6	3092	995	2.31
	1.8	2880	1030	2.39
	2.0	2653	1068	2.48
T10	0.2	4802	776	2.16
	0.4	4695	811	2.26
	0.6	4585	847	2.36
	0.8	4462	883	2.46
	1.0	4315	922	2.57
	1.2	4153	952	2.65
	1.4	3975	989	2.76
	1.6	3767	1022	2.85
	1.8	3581	1060	2.95
	2.0	3370	1096	3.05

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

8.5 Ton • 225 MBH Gas Heat Exchanger • Standard Static Direct Drive

Models: DHG1023DH, DHG1024DH, DHG1027DH

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	1902	520	0.37
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	2365	599	0.61
	0.4	2208	649	0.66
	0.6	2048	695	0.70
	0.8	1892	736	0.74
T3	0.2	3026	709	1.06
	0.4	2905	748	1.11
	0.6	2735	788	1.17
	0.8	2593	831	1.24
T4	0.2	3522	795	1.51
	0.4	3389	828	1.58
	0.6	3240	865	1.65
	0.8	3083	898	1.71
T5	0.2	3830	847	1.83
	0.4	3702	881	1.90
	0.6	3563	915	1.97
	0.8	3399	946	2.04
T6**	0.2	2024	546	0.44
	0.4	1928	606	0.48
	0.6	-	-	-
	0.8	-	-	-
T7**	0.2	2398	602	0.64
	0.4	2270	665	0.70
	0.6	2161	719	0.76
	0.8	1948	774	0.82
T8	0.2	2774	663	0.88
	0.4	2615	722	0.95
	0.6	2471	763	1.01
	0.8	-	-	-
T9	0.2	2988	703	1.04
	0.4	2829	756	1.12
	0.6	2697	792	1.17
	0.8	2583	835	1.24
T10	0.2	3182	743	1.22
	0.4	3041	788	1.30
	0.6	2953	821	1.35
	0.8	2797	868	1.43

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2029	440	0.31
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	2671	503	0.51
	0.4	2492	568	0.57
	0.6	2335	628	0.64
	0.8	2027	690	0.70
T3	0.2	3391	593	0.88
	0.4	3245	641	0.95
	0.6	3095	693	1.03
	0.8	2948	739	1.10
T4	0.2	3921	655	1.25
	0.4	3775	700	1.33
	0.6	3630	745	1.42
	0.8	3449	786	1.50
T5	0.2	4210	694	1.49
	0.4	4071	737	1.59
	0.6	3942	777	1.67
	0.8	3746	819	1.76
T6**	0.2	2216	459	0.37
	0.4	2066	533	0.43
	0.6	1894	599	0.48
	0.8	-	-	-
T7**	0.2	2645	528	0.56
	0.4	2515	577	0.61
	0.6	2360	634	0.67
	0.8	2137	694	0.74
T8	0.2	3116	575	0.76
	0.4	2944	616	0.81
	0.6	2782	666	0.88
	0.8	2582	722	0.95
T9	0.2	3410	589	0.87
	0.4	3193	640	0.95
	0.6	2993	690	1.02
	0.8	2823	740	1.10
T10	0.2	3655	604	0.99
	0.4	3427	663	1.09
	0.6	3210	714	1.17
	0.8	3066	759	1.25

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

8.5 Ton • 225 MBH Gas Heat Exchanger • Medium Static Direct Drive

Models: DHG1023LH, DHG1024LH, DHG1027LH

DOWN FLOW					HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP	SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	1863	520	0.37	T1**	0.2	2029	440	0.31
	0.4	-	-	-		0.4	1855	519	0.37
	0.6	-	-	-		0.6	-	-	-
	0.8	-	-	-		0.8	-	-	-
	1.0	-	-	-		1.0	-	-	-
	1.2	-	-	-		1.2	-	-	-
	1.4	-	-	-		1.4	-	-	-
T2**	0.2	3114	722	1.12	T2**	0.2	3458	603	0.93
	0.4	2977	761	1.18		0.4	3292	658	1.02
	0.6	2825	800	1.24		0.6	3155	700	1.08
	0.8	2634	846	1.31		0.8	3007	747	1.16
	1.0	2474	878	1.36		1.0	2844	797	1.23
	1.2	2236	931	1.44		1.2	2681	836	1.29
	1.4	1990	986	1.53		1.4	2469	885	1.37
T3	0.2	3026	709	1.06	T3	0.2	3391	593	0.88
	0.4	2905	748	1.11		0.4	3245	641	0.95
	0.6	2735	788	1.17		0.6	3095	693	1.03
	0.8	2593	831	1.24		0.8	2948	739	1.10
	1.0	-	-	-		1.0	2789	789	1.17
	1.2	-	-	-		1.2	2614	847	1.26
	1.4	-	-	-		1.4	-	-	-
T4	0.2	3997	874	1.99	T4	0.2	-	-	-
	0.4	3869	909	2.07		0.4	4200	754	1.71
	0.6	3740	942	2.14		0.6	4070	791	1.80
	0.8	3578	975	2.22		0.8	3879	838	1.91
	1.0	3417	1009	2.29		1.0	3699	874	1.99
	1.2	3257	1039	2.36		1.2	3535	923	2.10
	1.4	3091	1069	2.43		1.4	3341	946	2.15
T5	0.2	-	-	-	T5	0.2	-	-	-
	0.4	4125	958	2.46		0.4	-	-	-
	0.6	3997	992	2.55		0.6	-	-	-
	0.8	3806	1021	2.63		0.8	4194	863	2.22
	1.0	3701	1056	2.72		1.0	4012	898	2.31
	1.2	3547	1081	2.78		1.2	3879	955	2.45
	1.4	3374	1101	2.83		1.4	3683	967	2.49
T6**	0.2	2202	572	0.53	T6**	0.2	2455	488	0.45
	0.4	2098	636	0.59		0.4	2291	558	0.52
	0.6	1969	698	0.65		0.6	2105	618	0.57
	0.8	-	-	-		0.8	1842	688	0.64
	1.0	-	-	-		1.0	-	-	-
	1.2	-	-	-		1.2	-	-	-
	1.4	-	-	-		1.4	-	-	-
T7**	0.2	2948	681	0.97	T7**	0.2	-	-	-
	0.4	2729	741	1.06		0.4	3123	632	0.90
	0.6	2574	789	1.13		0.6	2931	681	0.97
	0.8	2447	824	1.18		0.8	2767	734	1.05
	1.0	2310	847	1.21		1.0	2539	781	1.12
	1.2	2126	857	1.22		1.2	2280	837	1.20
	1.4	1858	948	1.35		1.4	2083	892	1.27
T8	0.2	3256	760	1.30	T8	0.2	3734	613	1.05
	0.4	3128	802	1.37		0.4	3520	673	1.15
	0.6	3059	834	1.42		0.6	3311	723	1.24
	0.8	2885	884	1.51		0.8	3172	767	1.31
	1.0	2779	916	1.6		1.0	2951	811	1.39
	1.2	2619	955	1.63		1.2	2724	859	1.47
	1.4	2449	1000	1.71		1.4	2547	909	1.55
T9	0.2	3571	777	1.55	T9	0.2	3992	669	1.34
	0.4	3475	815	1.63		0.4	3881	710	1.42
	0.6	3364	887	1.77		0.6	3776	756	1.51
	0.8	3239	920	1.84		0.8	3631	804	1.61
	1.0	3115	957	1.91		1.0	3474	841	1.68
	1.2	2974	997	2.00		1.2	3329	884	1.77
	1.4	2825	1031	2.06		1.4	3125	928	1.86
T10	0.2	3879	753	1.72	T10	0.2	-	-	-
	0.4	3777	802	1.83		0.4	-	-	-
	0.6	3658	923	2.11		0.6	4054	789	1.80
	0.8	3532	980	2.24		0.8	3912	834	1.91
	1.0	3416	1008	2.30		1.0	3711	872	1.99
	1.2	3280	1038	2.37		1.2	3501	907	2.07
	1.4	3152	1071	2.45		1.4	2986	951	2.17

shaded speed tap - Gas heating airflow.

** (T1) (T2) and (T6) (T7) are part load only.

8.5 Ton • 225 MBH Gas Heat Exchanger • High Static Direct Drive

Models: DHG1023WH, DHG1024WH, DHG1027WH

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	1863	520	0.37
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-
T2**	0.2	3674	820	1.66
	0.4	3544	853	1.73
	0.6	3402	889	1.80
	0.8	3235	920	1.86
	1.0	3055	956	1.94
	1.2	2891	986	2.00
	1.4	2708	1011	2.05
	1.6	2499	1071	2.17
	1.8	2307	1103	2.23
	2.0	2054	1146	2.32
T3	0.2	3026	709	1.06
	0.4	2905	748	1.11
	0.6	2735	788	1.17
	0.8	2593	831	1.24
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-
T4	0.2	4166	907	2.22
	0.4	4029	939	2.30
	0.6	3906	969	2.37
	0.8	3717	1003	2.45
	1.0	3544	1037	2.54
	1.2	3394	1064	2.60
	1.4	3219	1092	2.67
	1.6	3060	1121	2.74
	1.8	2887	1148	2.81
	2.0	2721	1176	2.88
T5	0.2	-	-	-
	0.4	-	-	-
	0.6	4221	1022	2.85
	0.8	4047	1052	2.93
	1.0	3889	1084	3.02
	1.2	3734	1109	3.09
	1.4	3555	1133	3.16
	1.6	3396	1162	3.24
	1.8	3210	1186	3.30
	2.0	3041	1211	3.37
T6**	0.2	2522	621	0.71
	0.4	2381	684	0.78
	0.6	2261	733	0.84
	0.8	2087	783	0.89
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2029	440	0.31
	0.4	1855	519	0.37
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-
T2**	0.2	4061	675	1.37
	0.4	3919	720	1.46
	0.6	3792	761	1.54
	0.8	3610	802	1.62
	1.0	3427	845	1.71
	1.2	3261	894	1.81
	1.4	3042	919	1.86
	1.6	2865	962	1.95
	1.8	2649	1020	2.06
	2.0	2487	1041	2.11
T3	0.2	3391	593	0.88
	0.4	3245	641	0.95
	0.6	3095	693	1.03
	0.8	2948	739	1.10
	1.0	2789	789	1.17
	1.2	2614	847	1.26
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-
T4	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	4051	849	2.08
	1.0	3857	885	2.17
	1.2	3718	922	2.25
	1.4	3536	957	2.34
	1.6	3369	993	2.43
	1.8	3199	1028	2.52
	2.0	3048	1064	2.60
T5	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	4145	950	2.65
	1.4	3925	986	2.75
	1.6	3783	1018	2.84
	1.8	3606	1051	2.93
	2.0	3415	1085	3.02
T6**	0.2	2787	548	0.63
	0.4	2656	590	0.67
	0.6	2514	643	0.73
	0.8	2292	703	0.80
	1.0	2032	762	0.87
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-

shaded speed tap - Gas heating airflow.

** (T1) (T2) and (T6)(T7) are part load only.

8.5 Ton • 225 MBH Gas Heat Exchanger • High Static Direct Drive
 Models: DHG1023WH, DHG1024WH, DHG1027WH

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	-	-	-
	0.4	-	-	-
	0.6	3103	851	1.50
	0.8	2979	886	1.56
	1.0	2840	930	1.64
	1.2	2696	964	1.70
	1.4	2513	1027	1.81
	1.6	2312	1039	1.83
	1.8	2123	1102	1.94
2.0	1895	1155	2.03	
T8	0.2	3531	789	1.55
	0.4	3436	825	1.62
	0.6	3325	882	1.73
	0.8	3201	910	1.79
	1.0	3075	948	1.86
	1.2	2934	992	1.95
	1.4	2780	1025	2.01
	1.6	2620	1063	2.09
	1.8	2441	1111	2.18
2.0	-	-	-	
T9	0.2	3999	765	1.82
	0.4	3878	856	2.04
	0.6	3755	928	2.21
	0.8	3630	990	2.36
	1.0	3505	1020	2.43
	1.2	3378	1051	2.50
	1.4	3246	1083	2.58
	1.6	3113	1114	2.65
	1.8	2981	1138	2.71
2.0	2846	1172	2.79	
T10	0.2	-	-	-
	0.4	-	-	-
	0.6	4126	1012	2.82
	0.8	3991	1046	2.91
	1.0	3867	1078	3.00
	1.2	3743	1109	3.09
	1.4	3606	1138	3.17
	1.6	3474	1165	3.25
	1.8	3340	1193	3.32
2.0	3204	1219	3.40	

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	3115	817	1.44
	1.2	2941	865	1.52
	1.4	2747	908	1.60
	1.6	2425	958	1.69
	1.8	2211	1011	1.78
2.0	1860	1086	1.91	
T8	0.2	3949	663	1.30
	0.4	3837	705	1.39
	0.6	3733	752	1.48
	0.8	3588	800	1.57
	1.0	3433	837	1.65
	1.2	3129	881	1.73
	1.4	3097	925	1.82
	1.6	2817	970	1.90
	1.8	2577	1016	2.00
2.0	-	-	-	
T9	0.2	-	-	-
	0.4	-	-	-
	0.6	4157	801	1.91
	0.8	4013	842	2.01
	1.0	3816	885	2.11
	1.2	3618	913	2.17
	1.4	3417	958	2.28
	1.6	3179	997	2.37
	1.8	2971	1036	2.47
2.0	2740	1075	2.56	
T10	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	4153	952	2.65
	1.4	3975	989	2.76
	1.6	3767	1022	2.85
	1.8	3581	1060	2.95
2.0	3370	1096	3.05	

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

10 Ton • 130 MBH Gas Heat Exchanger • Standard Static Direct Drive

Models: DHG1203DL, DHG1204DL, DHG1207DL

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2255	553	0.42
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	2910	654	0.78
	0.4	2702	687	0.82
	0.6	2410	753	0.90
	0.8	2250	827	0.98
T3	0.2	3293	675	1.04
	0.4	3137	725	1.12
	0.6	3010	766	1.19
	0.8	-	-	-
T4	0.2	3940	774	1.62
	0.4	3827	812	1.70
	0.6	3696	850	1.78
	0.8	3571	892	1.87
T5	0.2	4126	802	1.82
	0.4	4022	838	1.91
	0.6	3889	877	1.99
	0.8	3808	908	2.07
T6**	0.2	1756	460	0.24
	0.4	1547	535	0.29
	0.6	1338	599	0.34
	0.8	-	-	-
T7**	0.2	2111	508	0.38
	0.4	1917	575	0.43
	0.6	1742	634	0.48
	0.8	1585	688	0.52
T8	0.2	2443	554	0.53
	0.4	2264	612	0.58
	0.6	2109	669	0.64
	0.8	-	-	-
T9	0.2	3440	692	1.12
	0.4	3308	734	1.19
	0.6	3158	782	1.27
	0.8	3012	827	1.34
T10	0.2	3575	710	1.23
	0.4	3469	749	1.29
	0.6	3293	798	1.38
	0.8	3170	840	1.45

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2267	492	0.37
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	2942	562	0.67
	0.4	2760	613	0.73
	0.6	2431	706	0.84
	0.8	2350	802	0.95
T3	0.2	3464	626	0.97
	0.4	3294	683	1.06
	0.6	3139	730	1.13
	0.8	-	-	-
T4	0.2	4159	707	1.48
	0.4	4062	742	1.56
	0.6	3880	794	1.66
	0.8	3722	844	1.77
T5	0.2	4366	732	1.66
	0.4	4177	786	1.79
	0.6	4097	817	1.86
	0.8	3973	854	1.94
T6**	0.2	1853	430	0.24
	0.4	1379	522	0.29
	0.6	1363	845	0.47
	0.8	-	-	-
T7**	0.2	2222	470	0.36
	0.4	1895	550	0.42
	0.6	1755	611	0.46
	0.8	1510	726	0.55
T8	0.2	2574	509	0.48
	0.4	2344	577	0.55
	0.6	2128	654	0.62
	0.8	1856	738	0.70
T9	0.2	3639	629	1.02
	0.4	3491	672	1.09
	0.6	3267	768	1.24
	0.8	3045	789	1.28
T10	0.2	3794	646	1.12
	0.4	3620	688	1.19
	0.6	3421	745	1.29
	0.8	3224	800	1.38

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

10 Ton • 130 MBH Gas Heat Exchanger • Medium Static Direct Drive

Models: DHG1203LL, DHG1204LL, DHG1207LL

DOWN FLOW					HORIZONTAL FLOW					
SPEED TAP	ESP	CFM	RPM	BHP	SPEED TAP	ESP	CFM	RPM	BHP	
T1**	0.2	2255	553	0.42	T1**	0.2	2267	492	0.37	
	0.4	-	-	-		0.4	-	-	-	-
	0.6	-	-	-		0.6	-	-	-	-
	0.8	-	-	-		0.8	-	-	-	-
	1.0	-	-	-		1.0	-	-	-	-
	1.2	-	-	-		1.2	-	-	-	-
	1.4	-	-	-		1.4	-	-	-	-
T2**	0.2	3293	675	1.04	T2**	0.2	3464	626	0.97	
	0.4	3137	725	1.12		0.4	3294	683	1.06	
	0.6	3010	766	1.19		0.6	3139	730	1.13	
	0.8	2781	825	1.28		0.8	2859	807	1.25	
	1.0	2580	876	1.36		1.0	2544	884	1.37	
	1.2	2426	913	1.41		1.2	2387	920	1.42	
	1.4	2241	954	1.48		1.4	2208	963	1.49	
T3	0.2	3293	675	1.04	T3	0.2	3464	626	0.97	
	0.4	3137	725	1.12		0.4	3294	683	1.06	
	0.6	3010	766	1.19		0.6	3139	730	1.13	
	0.8	-	-	-		0.8	-	-	-	-
	1.0	-	-	-		1.0	-	-	-	-
	1.2	-	-	-		1.2	-	-	-	-
	1.4	-	-	-		1.4	-	-	-	-
T4	0.2	4426	847	2.17	T4	0.2	4671	773	1.98	
	0.4	4311	880	2.25		0.4	4596	820	2.10	
	0.6	4180	916	2.34		0.6	4420	854	2.19	
	0.8	4102	944	2.42		0.8	4250	894	2.29	
	1.0	3957	982	2.51		1.0	4119	928	2.38	
	1.2	3858	1013	2.59		1.2	3987	960	2.46	
	1.4	3742	1047	2.68		1.4	3873	1008	2.58	
T5	0.2	4628	878	2.45	T5	0.2	4896	802	2.23	
	0.4	4516	912	2.54		0.4	4771	839	2.34	
	0.6	4402	945	2.63		0.6	4646	878	2.45	
	0.8	4295	978	2.72		0.8	4510	915	2.55	
	1.0	4186	1011	2.82		1.0	4378	950	2.65	
	1.2	4076	1042	2.90		1.2	4242	992	2.76	
	1.4	3969	1073	2.99		1.4	4093	1035	2.88	
T6**	0.2	1955	487	0.32	T6**	0.2	2060	453	0.30	
	0.4	1755	557	0.36		0.4	1674	537	0.36	
	0.6	1567	619	0.41		0.6	1582	627	0.42	
	0.8	-	-	-		0.8	1359	721	0.48	
	1.0	-	-	-		1.0	-	-	-	
	1.2	-	-	-		1.2	-	-	-	
	1.4	-	-	-		1.4	-	-	-	
T7**	0.2	2628	581	0.62	T7**	0.2	2741	534	0.57	
	0.4	2464	636	0.68		0.4	2519	599	0.64	
	0.6	2300	691	0.74		0.6	2296	665	0.71	
	0.8	2136	745	0.80		0.8	2074	731	0.78	
	1.0	1972	800	0.86		1.0	1852	797	0.85	
	1.2	1807	855	0.92		1.2	1629	863	0.92	
	1.4	1643	910	0.97		1.4	1407	929	1.00	
T8	0.2	2691	588	0.65	T8	0.2	2834	538	0.59	
	0.4	2523	641	0.71		0.4	2651	599	0.66	
	0.6	2376	696	0.77		0.6	2405	806	0.89	
	0.8	2017	782	0.86		0.8	2128	748	0.83	
	1.0	-	-	-		1.0	-	-	-	
	1.2	-	-	-		1.2	-	-	-	
	1.4	-	-	-		1.4	-	-	-	
T9	0.2	3575	710	1.23	T9	0.2	3794	646	1.12	
	0.4	3469	749	1.29		0.4	3620	688	1.19	
	0.6	3293	798	1.38		0.6	3421	745	1.29	
	0.8	3170	840	1.45		0.8	3224	800	1.38	
	1.0	3046	880	1.52		1.0	3047	854	1.47	
	1.2	2786	939	1.62		1.2	2743	927	1.60	
	1.4	2545	995	1.72		1.4	2406	998	1.72	
T10	0.2	3848	750	1.46	T10	0.2	-	-	-	
	0.4	3737	790	1.54		0.4	-	-	-	
	0.6	3579	833	1.62		0.6	3752	817	1.59	
	0.8	3471	872	1.70		0.8	3588	820	1.60	
	1.0	3357	912	1.78		1.0	3437	871	1.70	
	1.2	3145	958	1.87		1.2	3191	941	1.83	
	1.4	2952	1009	1.97		1.4	2911	970	1.89	

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

10 Ton • 130 MBH Gas Heat Exchanger • High Static Direct Drive

Models: DHG1203WL, DHG1204WL, DHG1207WL

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2248	535	0.44
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T2**	0.2	3814	761	1.35
	0.4	3709	802	1.42
	0.6	3534	839	1.49
	0.8	3399	887	1.57
	1.0	3265	919	1.63
	1.2	3012	967	1.72
	1.4	2779	1027	1.82
	1.6	2643	1042	1.85
	1.8	2509	1060	1.88
2.0	2383	1120	1.99	
T3	0.2	3814	761	1.35
	0.4	3709	802	1.42
	0.6	3534	839	1.49
	0.8	3399	887	1.57
	1.0	3265	919	1.63
	1.2	3012	967	1.72
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T4	0.2	4790	914	2.55
	0.4	4674	948	2.64
	0.6	4565	982	2.74
	0.8	4440	1013	2.82
	1.0	4321	1046	2.91
	1.2	4211	1076	3.00
	1.4	4094	1104	3.08
	1.6	3988	1135	3.16
	1.8	3884	1163	3.24
2.0	3770	1192	3.32	
T5	0.2	4976	948	2.83
	0.4	4866	979	2.93
	0.6	4763	1010	3.02
	0.8	4634	1040	3.11
	1.0	4520	1071	3.20
	1.2	4408	1099	3.28
	1.4	4288	1128	3.37
	1.6	4187	1157	3.46
	1.8	4078	1182	3.53
2.0	3976	1214	3.63	
T6**	0.2	2306	543	0.46
	0.4	2069	595	0.50
	0.6	1774	631	0.53
	0.8	1416	649	0.55
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2312	493	0.40
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T2**	0.2	3815	680	1.21
	0.4	3705	721	1.28
	0.6	3514	777	1.38
	0.8	3367	823	1.46
	1.0	3222	867	1.54
	1.2	2937	938	1.66
	1.4	2670	1004	1.78
	1.6	2522	1040	1.84
	1.8	2375	1072	1.90
2.0	2222	1107	1.96	
T3	0.2	3815	680	1.21
	0.4	3705	721	1.28
	0.6	3514	777	1.38
	0.8	3367	823	1.46
	1.0	3222	867	1.54
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T4	0.2	4915	830	2.31
	0.4	4789	872	2.43
	0.6	4659	905	2.52
	0.8	4533	959	2.67
	1.0	4420	980	2.73
	1.2	4278	1050	2.93
	1.4	4139	1055	2.94
	1.6	4024	1145	3.19
	1.8	3892	1125	3.13
2.0	3778	1150	3.20	
T5	0.2	-	-	-
	0.4	4972	891	2.66
	0.6	4843	925	2.76
	0.8	4720	964	2.88
	1.0	4607	1002	2.99
	1.2	4471	1036	3.09
	1.4	4338	1070	3.20
	1.6	4223	1105	3.30
	1.8	4095	1140	3.41
2.0	3983	1170	3.50	
T6**	0.2	2376	500	0.42
	0.4	2175	571	0.48
	0.6	2024	657	0.56
	0.8	1884	689	0.58
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

10 Ton • 130 MBH Gas Heat Exchanger • High Static Direct Drive
 Models: DHG1203WL, DHG1204WL, DHG1207WL

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	-	-	-
	0.4	-	-	-
	0.6	2830	761	1.05
	0.8	2693	809	1.12
	1.0	2457	864	1.19
	1.2	2219	921	1.27
	1.4	1937	970	1.34
	1.6	1778	1006	1.39
	1.8	1574	1055	1.45
T8	2.0	1365	1149	1.58
	0.2	3229	678	0.97
	0.4	3107	723	1.03
	0.6	2907	770	1.10
	0.8	2778	816	1.17
	1.0	2557	869	1.24
	1.2	2308	925	1.32
	1.4	2032	976	1.39
	1.6	-	-	-
T9	1.8	-	-	-
	2.0	-	-	-
	0.2	3706	750	1.34
	0.4	3596	786	1.40
	0.6	3413	835	1.49
	0.8	3273	874	1.56
	1.0	3132	913	1.63
	1.2	2874	973	1.74
	1.4	2641	1027	1.83
T10	1.6	2501	1063	1.90
	1.8	2366	1097	1.96
	2.0	2226	1129	2.02
	0.2	-	-	-
	0.4	3836	832	1.68
	0.6	3714	873	1.77
	0.8	3576	905	1.83
	1.0	3432	948	1.92
	1.2	3323	986	2.00
T10	1.4	3177	1020	2.06
	1.6	2956	1075	2.18
	1.8	2690	1127	2.28
	2.0	2560	1156	2.34

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	2759	766	1.06
	1.0	2540	834	1.15
	1.2	2250	898	1.24
	1.4	1983	958	1.32
	1.6	1840	1013	1.40
	1.8	1627	1073	1.48
T8	2.0	1413	1132	1.56
	0.2	3335	613	0.87
	0.4	3188	668	0.95
	0.6	3021	720	1.03
	0.8	2855	770	1.10
	1.0	2641	836	1.19
	1.2	2345	902	1.29
	1.4	2073	963	1.38
	1.6	-	-	-
T9	1.8	-	-	-
	2.0	-	-	-
	0.2	3819	670	1.20
	0.4	3711	712	1.27
	0.6	3519	770	1.38
	0.8	3377	821	1.47
	1.0	3230	870	1.55
	1.2	2945	944	1.69
	1.4	2687	1015	1.81
T10	1.6	2525	1055	1.88
	1.8	2361	1089	1.94
	2.0	2232	1128	2.01
	0.2	-	-	-
	0.4	-	-	-
	0.6	3841	805	1.63
	0.8	3710	845	1.71
	1.0	3546	895	1.81
	1.2	3410	941	1.91
T10	1.4	3285	980	1.98
	1.6	3028	1045	2.12
	1.8	2732	1110	2.25
	2.0	2549	1152	2.33

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

10 Ton • 180 MBH Gas Heat Exchanger • Standard Static Direct Drive
 Models: DHG1203DM, DHG1204DM, DHG1207DM

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2184	520	0.43
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	2910	654	0.78
	0.4	2702	687	0.82
	0.6	2410	753	0.90
	0.8	2250	792	0.94
T3	0.2	3669	734	1.36
	0.4	3556	775	1.44
	0.6	3428	816	1.52
	0.8	3274	859	1.60
T4	0.2	3940	774	1.62
	0.4	3827	812	1.70
	0.6	3696	850	1.78
	0.8	3571	892	1.87
T5	0.2	4126	802	1.82
	0.4	4022	838	1.91
	0.6	3889	877	1.99
	0.8	3808	908	2.07
T6**	0.2	1938	485	0.31
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T7**	0.2	2621	582	0.62
	0.4	2465	637	0.68
	0.6	2300	690	0.74
	0.8	2136	745	0.80
T8	0.2	2731	593	0.67
	0.4	2564	646	0.73
	0.6	-	-	-
	0.8	-	-	-
T9	0.2	3555	708	1.21
	0.4	3428	749	1.28
	0.6	3275	796	1.36
	0.8	3145	838	1.43
T10	0.2	4200	800	1.82
	0.4	4081	842	1.91
	0.6	3956	882	2.01
	0.8	3855	919	2.09

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2286	486	0.41
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	2942	562	0.67
	0.4	2760	613	0.73
	0.6	2431	706	0.84
	0.8	2350	802	0.95
T3	0.2	3874	673	1.25
	0.4	3699	713	1.32
	0.6	3560	769	1.43
	0.8	3438	820	1.52
T4	0.2	4159	707	1.48
	0.4	4062	742	1.56
	0.6	3880	794	1.66
	0.8	3722	844	1.77
T5	0.2	4366	732	1.66
	0.4	4177	786	1.79
	0.6	4097	817	1.86
	0.8	3973	854	1.94
T6**	0.2	2042	451	0.30
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T7**	0.2	2751	534	0.57
	0.4	2525	595	0.64
	0.6	2291	668	0.71
	0.8	2074	731	0.78
T8	0.2	2876	543	0.61
	0.4	2699	602	0.68
	0.6	2450	657	0.74
	0.8	-	-	-
T9	0.2	3765	643	1.10
	0.4	3610	684	1.17
	0.6	3402	681	1.16
	0.8	3195	797	1.36
T10	0.2	4468	726	1.65
	0.4	4258	766	1.74
	0.6	4175	811	1.84
	0.8	4056	851	1.93

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

10 Ton • 180 MBH Gas Heat Exchanger • Medium Static Direct Drive

Models: DHG1203LM, DHG1204LM, DHG1207LM

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2184	520	0.43
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
T2**	0.2	3293	675	1.04
	0.4	3137	725	1.12
	0.6	3010	766	1.19
	0.8	2781	825	1.28
	1.0	2580	876	1.36
	1.2	2426	913	1.41
	1.4	2241	954	1.48
T3	0.2	3669	734	1.36
	0.4	3556	775	1.44
	0.6	3428	816	1.52
	0.8	3274	859	1.60
	1.0	3171	892	1.66
	1.2	-	-	-
	1.4	-	-	-
T4	0.2	4426	847	2.17
	0.4	4311	880	2.25
	0.6	4180	916	2.34
	0.8	4102	944	2.42
	1.0	3957	982	2.51
	1.2	3858	1013	2.59
	1.4	3742	1047	2.68
T5	0.2	4628	878	2.45
	0.4	4516	912	2.54
	0.6	4402	945	2.63
	0.8	4295	978	2.72
	1.0	4186	1011	2.82
	1.2	4076	1042	2.90
	1.4	3969	1073	2.99
T6**	0.2	2516	564	0.56
	0.4	2340	621	0.62
	0.6	2188	677	0.67
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
T7**	0.2	3329	682	1.08
	0.4	3186	728	1.15
	0.6	3056	770	1.22
	0.8	2852	823	1.30
	1.0	2679	876	1.38
	1.2	2500	911	1.44
	1.4	2290	959	1.51
T8	0.2	4018	786	1.70
	0.4	3911	823	1.78
	0.6	3776	862	1.87
	0.8	3674	899	1.95
	1.0	3529	973	2.1
	1.2	3391	975	2.11
	1.4	3222	1014	2.20
T9	0.2	4343	835	2.07
	0.4	4237	869	2.16
	0.6	4109	905	2.25
	0.8	4022	938	2.33
	1.0	3530	973	2.41
	1.2	3771	1008	2.50
	1.4	3639	1038	2.57
T10	0.2	4628	878	2.45
	0.4	4516	912	2.54
	0.6	4402	945	2.63
	0.8	4295	978	2.72
	1.0	4186	1011	2.82
	1.2	4076	1042	2.90
	1.4	3969	1073	2.99

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2286	486	0.41
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
T2**	0.2	3464	626	0.97
	0.4	3294	683	1.06
	0.6	3139	730	1.13
	0.8	2859	807	1.25
	1.0	2544	884	1.37
	1.2	2387	920	1.42
	1.4	2208	963	1.49
T3	0.2	3874	673	1.25
	0.4	3699	713	1.32
	0.6	3560	769	1.43
	0.8	3438	820	1.52
	1.0	3243	870	1.62
	1.2	-	-	-
	1.4	-	-	-
T4	0.2	4671	773	1.98
	0.4	4596	820	2.10
	0.6	4420	854	2.19
	0.8	4250	894	2.29
	1.0	4119	928	2.38
	1.2	3987	960	2.46
	1.4	3873	1008	2.58
T5	0.2	4896	802	2.23
	0.4	4771	839	2.34
	0.6	4646	878	2.45
	0.8	4510	915	2.55
	1.0	4378	950	2.65
	1.2	4242	992	2.76
	1.4	4093	1035	2.88
T6**	0.2	2648	517	0.51
	0.4	2434	583	0.58
	0.6	2208	647	0.64
	0.8	1933	741	0.74
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
T7**	0.2	3582	622	0.98
	0.4	3436	666	1.05
	0.6	3206	812	1.28
	0.8	2978	785	1.24
	1.0	2769	842	1.33
	1.2	2454	913	1.44
	1.4	2144	957	1.51
T8	0.2	4359	712	1.54
	0.4	4170	749	1.62
	0.6	4044	821	1.78
	0.8	3910	842	1.82
	1.0	3732	890	1.93
	1.2	3574	945	2.0
	1.4	3379	977	2.1
T9	0.2	4707	754	1.87
	0.4	4534	792	1.97
	0.6	4425	828	2.05
	0.8	4306	877	2.18
	1.0	4102	919	2.28
	1.2	4026	954	2.37
	1.4	3925	995	2.47
T10	0.2	5018	794	2.21
	0.4	4884	834	2.32
	0.6	4750	875	2.44
	0.8	4613	912	2.54
	1.0	4481	950	2.65
	1.2	4339	990	2.76
	1.4	4187	1030	2.87

shaded speed tap - Gas heating airflow.

** (T1) (T2) and (T6) (T7) are part load only.

10 Ton • 180 MBH Gas Heat Exchanger • High Static Direct Drive

Models: DHG1203WM, DHG1204WM, DHG1207WM

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2248	535	0.44
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T2**	0.2	3814	761	1.35
	0.4	3709	802	1.42
	0.6	3534	839	1.49
	0.8	3399	887	1.57
	1.0	3265	919	1.63
	1.2	3012	967	1.72
	1.4	2779	1027	1.82
	1.6	2643	1042	1.85
	1.8	2509	1060	1.88
2.0	2383	1120	1.99	
T3	0.2	3814	761	1.35
	0.4	3709	802	1.42
	0.6	3534	839	1.49
	0.8	3399	887	1.57
	1.0	3265	919	1.63
	1.2	3012	967	1.72
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T4	0.2	4790	914	2.55
	0.4	4674	948	2.64
	0.6	4565	982	2.74
	0.8	4440	1013	2.82
	1.0	4321	1046	2.91
	1.2	4211	1076	3.00
	1.4	4094	1104	3.08
	1.6	3988	1135	3.16
	1.8	3884	1163	3.24
2.0	3770	1192	3.32	
T5	0.2	4976	948	2.83
	0.4	4866	979	2.93
	0.6	4763	1010	3.02
	0.8	4634	1040	3.11
	1.0	4520	1071	3.20
	1.2	4408	1099	3.28
	1.4	4288	1128	3.37
	1.6	4187	1157	3.46
	1.8	4078	1182	3.53
2.0	3976	1214	3.63	
T6**	0.2	3493	718	1.16
	0.4	3374	758	1.23
	0.6	3189	805	1.30
	0.8	3053	847	1.37
	1.0	2899	890	1.44
	1.2	2628	949	1.54
	1.4	2393	1001	1.62
	1.6	2242	1050	1.70
	1.8	2059	1094	1.77
2.0	1897	1131	1.83	

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2312	493	0.40
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T2**	0.2	3815	680	1.21
	0.4	3705	721	1.28
	0.6	3514	777	1.38
	0.8	3367	823	1.46
	1.0	3222	867	1.54
	1.2	2937	938	1.66
	1.4	2670	1004	1.78
	1.6	2522	1040	1.84
	1.8	2375	1072	1.90
2.0	2222	1107	1.96	
T3	0.2	3815	680	1.21
	0.4	3705	721	1.28
	0.6	3514	777	1.38
	0.8	3367	823	1.46
	1.0	3222	867	1.54
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T4	0.2	4915	830	2.31
	0.4	4789	872	2.43
	0.6	4659	905	2.52
	0.8	4533	959	2.67
	1.0	4420	980	2.73
	1.2	4278	1050	2.93
	1.4	4139	1055	2.94
	1.6	4024	1145	3.19
	1.8	3892	1125	3.13
2.0	3778	1150	3.20	
T5	0.2	-	-	-
	0.4	4972	891	2.66
	0.6	4843	925	2.76
	0.8	4720	964	2.88
	1.0	4607	1002	2.99
	1.2	4471	1036	3.09
	1.4	4338	1070	3.20
	1.6	4223	1105	3.30
	1.8	4095	1140	3.41
2.0	3983	1170	3.50	
T6**	0.2	3603	644	1.04
	0.4	3478	693	1.12
	0.6	3301	750	1.21
	0.8	3171	791	1.28
	1.0	2993	853	1.38
	1.2	2691	919	1.49
	1.4	2418	988	1.60
	1.6	2278	1035	1.68
	1.8	2123	1070	1.73
2.0	1933	1128	1.83	

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

10 Ton • 180 MBH Gas Heat Exchanger • High Static Direct Drive
 Models: DHG1203WM, DHG1204WM, DHG1207WM

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	4026	791	1.57
	0.4	3913	831	1.65
	0.6	3757	870	1.73
	0.8	3628	912	1.81
	1.0	3496	946	1.88
	1.2	3294	988	1.96
	1.4	3104	1037	2.06
	1.6	2975	1060	2.11
	1.8	2855	1083	2.15
T8	2.0	2725	1130	2.25
	0.2	4384	845	1.99
	0.4	4265	884	2.08
	0.6	4134	922	2.17
	0.8	4010	958	2.26
	1.0	3884	992	2.34
	1.2	3744	1027	2.42
	1.4	3604	1062	2.50
	1.6	3486	1092	2.57
T9	1.8	3381	1121	2.64
	2.0	3252	1154	2.72
	0.2	4973	947	3.02
	0.4	4862	978	3.12
	0.6	4760	1010	3.22
	0.8	4629	1039	3.31
	1.0	4509	1067	3.40
	1.2	4402	1098	3.50
	1.4	4287	1128	3.60
T10	1.6	4181	1156	3.69
	1.8	4069	1184	3.78
	2.0	3972	1214	3.87
	0.2	-	-	-
	0.4	5379	1069	4.11
	0.6	5276	1093	4.20
	0.8	5157	1107	4.26
	1.0	5049	1140	4.38
	1.2	4938	1164	4.47

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	-	-	-
	0.4	3920	745	1.48
	0.6	3770	792	1.57
	0.8	3640	844	1.68
	1.0	3485	889	1.77
	1.2	3319	948	1.88
	1.4	3206	1000	1.99
	1.6	2907	1053	2.09
	1.8	2667	1104	2.19
T8	2.0	2502	1138	2.26
	0.2	4497	759	1.79
	0.4	4356	804	1.89
	0.6	4237	845	1.99
	0.8	4115	889	2.09
	1.0	3977	930	2.19
	1.2	3878	975	2.30
	1.4	3717	1015	2.39
	1.6	3536	1071	2.52
T9	1.8	3290	1117	2.63
	2.0	3024	1165	2.74
	0.2	5130	839	2.60
	0.4	5013	884	2.74
	0.6	4877	916	2.84
	0.8	4774	956	2.96
	1.0	4665	991	3.07
	1.2	4527	1030	3.19
	1.4	4462	1073	3.33
T10	1.6	4301	1108	3.43
	1.8	4187	1154	3.58
	2.0	4105	1128	3.50
	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	5281	1019	3.92
	1.0	5155	1049	4.03
	1.2	5040	1083	4.16

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

10 Ton • 240 MBH Gas Heat Exchanger • Standard Static Direct Drive
 Models: DHG1203DH, DHG1204DH, DHG1207DH

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2184	520	0.43
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	2910	654	0.78
	0.4	2702	687	0.82
	0.6	2410	753	0.90
	0.8	2250	792	0.94
T3	0.2	3669	734	1.36
	0.4	3556	775	1.44
	0.6	3428	816	1.52
	0.8	3274	859	1.60
T4	0.2	3940	774	1.62
	0.4	3827	812	1.70
	0.6	3696	850	1.78
	0.8	3571	892	1.87
T5	0.2	4126	802	1.82
	0.4	4022	838	1.91
	0.6	3889	877	1.99
	0.8	3808	908	2.07
T6**	0.2	2223	524	0.43
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T7**	0.2	3023	634	0.84
	0.4	2870	681	0.90
	0.6	2725	733	0.97
	0.8	2486	795	1.05
T8	0.2	3720	732	1.35
	0.4	3602	772	1.42
	0.6	3446	817	1.50
	0.8	3331	857	1.58
T9	0.2	3979	769	1.59
	0.4	3875	809	1.67
	0.6	3717	850	1.76
	0.8	3611	890	1.84
T10	0.2	4200	800	1.82
	0.4	4081	842	1.91
	0.6	3956	882	2.01
	0.8	3855	919	2.09

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2286	486	0.41
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	2942	562	0.67
	0.4	2760	613	0.73
	0.6	2431	706	0.84
	0.8	2317	733	0.87
T3	0.2	3874	673	1.25
	0.4	3699	713	1.32
	0.6	3560	769	1.43
	0.8	3438	820	1.52
T4	0.2	4159	707	1.48
	0.4	4062	742	1.56
	0.6	3880	794	1.66
	0.8	3722	844	1.77
T5	0.2	4366	732	1.66
	0.4	4177	786	1.79
	0.6	4097	817	1.86
	0.8	3973	854	1.94
T6**	0.2	2340	483	0.40
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T7**	0.2	3187	577	0.76
	0.4	3038	629	0.83
	0.6	2783	664	0.88
	0.8	2519	764	1.01
T8	0.2	3947	664	1.22
	0.4	3781	703	1.29
	0.6	3599	816	1.50
	0.8	3416	1002	1.84
T9	0.2	4237	698	1.44
	0.4	4053	734	1.52
	0.6	3912	819	1.69
	0.8	3765	831	1.72
T10	0.2	4468	726	1.65
	0.4	4258	766	1.74
	0.6	4175	811	1.84
	0.8	4056	851	1.93

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

10 Ton • 240 MBH Gas Heat Exchanger • Medium Static Direct Drive

Models: DHG1203LH, DHG1204LH, DHG1207LH

DOWN FLOW					HORIZONTAL FLOW					
SPEED TAP	ESP	CFM	RPM	BHP	SPEED TAP	ESP	CFM	RPM	BHP	
T1**	0.2	2184	520	0.43	T1**	0.2	2286	486	0.41	
	0.4	-	-	-		0.4	-	-	-	-
	0.6	-	-	-		0.6	-	-	-	-
	0.8	-	-	-		0.8	-	-	-	-
	1.0	-	-	-		1.0	-	-	-	-
	1.2	-	-	-		1.2	-	-	-	-
	1.4	-	-	-		1.4	-	-	-	-
T2**	0.2	3293	675	1.04	T2**	0.2	3464	626	0.97	
	0.4	3137	725	1.12		0.4	3294	683	1.06	
	0.6	3010	766	1.19		0.6	3139	730	1.13	
	0.8	2781	825	1.28		0.8	2859	807	1.25	
	1.0	2580	876	1.36		1.0	2544	884	1.37	
	1.2	2426	913	1.41		1.2	2387	920	1.42	
	1.4	2241	954	1.48		1.4	2208	963	1.49	
T3	0.2	3669	734	1.36	T3	0.2	3874	673	1.25	
	0.4	3556	775	1.44		0.4	3699	713	1.32	
	0.6	3428	816	1.52		0.6	3560	769	1.43	
	0.8	3274	859	1.60		0.8	3438	820	1.52	
	1.0	3171	892	1.66		1.0	3243	870	1.62	
	1.2	-	-	-		1.2	-	-	-	-
	1.4	-	-	-		1.4	-	-	-	-
T4	0.2	4426	847	2.17	T4	0.2	4671	773	1.98	
	0.4	4311	880	2.25		0.4	4596	820	2.10	
	0.6	4180	916	2.34		0.6	4420	854	2.19	
	0.8	4102	944	2.42		0.8	4250	894	2.29	
	1.0	3957	982	2.51		1.0	4119	928	2.38	
	1.2	3858	1013	2.59		1.2	3987	960	2.46	
	1.4	3742	1047	2.68		1.4	3873	1008	2.58	
T5	0.2	4628	878	2.45	T5	0.2	4896	802	2.23	
	0.4	4516	912	2.54		0.4	4771	839	2.34	
	0.6	4402	945	2.63		0.6	4646	878	2.45	
	0.8	4295	978	2.72		0.8	4510	915	2.55	
	1.0	4186	1011	2.82		1.0	4378	950	2.65	
	1.2	4076	1042	2.90		1.2	4242	992	2.76	
	1.4	3969	1073	2.99		1.4	4093	1035	2.88	
T6**	0.2	2827	607	0.73	T6**	0.2	2978	554	0.66	
	0.4	2665	658	0.79		0.4	2813	611	0.73	
	0.6	2520	711	0.85		0.6	2559	849	1.01	
	0.8	-	-	-		0.8	2285	754	0.90	
	1.0	-	-	-		1.0	-	-	-	
	1.2	-	-	-		1.2	-	-	-	
	1.4	-	-	-		1.4	-	-	-	
T7**	0.2	3558	709	1.21	T7**	0.2	3768	643	1.10	
	0.4	3431	750	1.28		0.4	3613	684	1.17	
	0.6	3279	796	1.36		0.6	3406	701	1.20	
	0.8	3149	839	1.43		0.8	3199	797	1.36	
	1.0	3016	880	1.50		1.0	3035	852	1.46	
	1.2	2761	934	1.60		1.2	2723	928	1.59	
	1.4	2527	991	1.69		1.4	2396	962	1.64	
T8	0.2	4151	794	1.77	T8	0.2	4433	721	1.61	
	0.4	4057	834	1.86		0.4	4243	757	1.69	
	0.6	3904	874	1.95		0.6	4125	822	1.83	
	0.8	3795	914	2.04		0.8	3997	849	1.89	
	1.0	3678	951	2.1		1.0	3809	896	2.00	
	1.2	3551	984	2.19		1.2	3675	946	2.1	
	1.4	3421	1024	2.28		1.4	3505	980	2.2	
T9	0.2	4414	832	2.11	T9	0.2	4741	758	1.91	
	0.4	4338	877	2.20		0.4	4572	797	2.00	
	0.6	4206	912	2.29		0.6	4461	828	2.08	
	0.8	4092	952	2.39		0.8	4341	881	2.21	
	1.0	3969	988	2.48		1.0	4140	922	2.32	
	1.2	3895	1012	2.54		1.2	4065	956	2.40	
	1.4	3803	1044	2.62		1.4	3966	998	2.51	
T10	0.2	4726	877	2.44	T10	0.2	5018	794	2.21	
	0.4	4606	914	2.55		0.4	4884	834	2.32	
	0.6	4488	948	2.64		0.6	4750	875	2.44	
	0.8	4382	980	2.73		0.8	4613	912	2.54	
	1.0	4264	1017	2.83		1.0	4481	950	2.65	
	1.2	4158	1046	2.91		1.2	4339	990	2.76	
	1.4	4051	1080	3.01		1.4	4187	1030	2.87	

shaded speed tap - Gas heating airflow.

** (T1) (T2) and (T6)(T7) are part load only.

10 Ton • 240 MBH Gas Heat Exchanger • High Static Direct Drive

Models: DHG1203WH, DHG1204WH, DHG1207WH

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2248	535	0.44
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T2**	0.2	3814	761	1.35
	0.4	3709	802	1.42
	0.6	3534	839	1.49
	0.8	3399	887	1.57
	1.0	3265	919	1.63
	1.2	3012	967	1.72
	1.4	2779	1027	1.82
	1.6	2643	1042	1.85
	1.8	2509	1060	1.88
2.0	2383	1120	1.99	
T3	0.2	3814	761	1.35
	0.4	3709	802	1.42
	0.6	3534	839	1.49
	0.8	3399	887	1.57
	1.0	3265	919	1.63
	1.2	3012	967	1.72
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T4	0.2	4790	914	2.55
	0.4	4674	948	2.64
	0.6	4565	982	2.74
	0.8	4440	1013	2.82
	1.0	4321	1046	2.91
	1.2	4211	1076	3.00
	1.4	4094	1104	3.08
	1.6	3988	1135	3.16
	1.8	3884	1163	3.24
2.0	3770	1192	3.32	
T5	0.2	4976	948	2.83
	0.4	4866	979	2.93
	0.6	4763	1010	3.02
	0.8	4634	1040	3.11
	1.0	4520	1071	3.20
	1.2	4408	1099	3.28
	1.4	4288	1128	3.37
	1.6	4187	1157	3.46
	1.8	4078	1182	3.53
2.0	3976	1214	3.63	
T6**	0.2	3158	668	0.92
	0.4	3033	713	0.98
	0.6	2830	761	1.05
	0.8	2693	809	1.12
	1.0	2457	864	1.19
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2312	493	0.40
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T2**	0.2	3815	680	1.21
	0.4	3705	721	1.28
	0.6	3514	777	1.38
	0.8	3367	823	1.46
	1.0	3222	867	1.54
	1.2	2937	938	1.66
	1.4	2670	1004	1.78
	1.6	2522	1040	1.84
	1.8	2375	1072	1.90
2.0	2222	1107	1.96	
T3	0.2	3815	680	1.21
	0.4	3705	721	1.28
	0.6	3514	777	1.38
	0.8	3367	823	1.46
	1.0	3222	867	1.54
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T4	0.2	4915	830	2.31
	0.4	4789	872	2.43
	0.6	4659	905	2.52
	0.8	4533	959	2.67
	1.0	4420	980	2.73
	1.2	4278	1050	2.93
	1.4	4139	1055	2.94
	1.6	4024	1145	3.19
	1.8	3892	1125	3.13
2.0	3778	1150	3.20	
T5	0.2	-	-	-
	0.4	4972	891	2.66
	0.6	4843	925	2.76
	0.8	4720	964	2.88
	1.0	4607	1002	2.99
	1.2	4471	1036	3.09
	1.4	4338	1070	3.20
	1.6	4223	1105	3.30
	1.8	4095	1140	3.41
2.0	3983	1170	3.50	
T6**	0.2	3265	605	0.83
	0.4	3112	661	0.91
	0.6	2944	713	0.98
	0.8	2759	766	1.06
	1.0	2540	834	1.15
	1.2	2250	898	1.24
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

10 Ton • 240 MBH Gas Heat Exchanger • High Static Direct Drive

Models: DHG1203WH, DHG1204WH, DHG1207WH

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	3926	777	1.46
	0.4	3816	817	1.54
	0.6	3651	855	1.61
	0.8	3520	900	1.70
	1.0	3387	933	1.76
	1.2	3162	978	1.84
	1.4	2953	1032	1.95
	1.6	2820	1051	1.98
	1.8	2694	1072	2.02
2.0	2566	1125	2.12	
T8	0.2	4420	851	2.04
	0.4	4301	890	2.13
	0.6	4173	927	2.22
	0.8	4049	963	2.30
	1.0	3923	997	2.39
	1.2	3788	1032	2.47
	1.4	3652	1066	2.55
	1.6	3535	1096	2.62
	1.8	3430	1125	2.69
2.0	3302	1157	2.77	
T9	0.2	4973	947	3.02
	0.4	4862	978	3.12
	0.6	4760	1010	3.22
	0.8	4629	1039	3.31
	1.0	4509	1067	3.40
	1.2	4402	1098	3.50
	1.4	4287	1128	3.60
	1.6	4181	1156	3.69
	1.8	4069	1184	3.78
2.0	3972	1214	3.87	
T10	0.2	5486	1024	3.94
	0.4	5379	1069	4.11
	0.6	5276	1093	4.20
	0.8	5157	1107	4.26
	1.0	5049	1140	4.38
	1.2	4938	1164	4.47
	1.4	4824	1190	4.57
	1.6	4720	1219	4.68
	1.8	4609	1246	4.79
2.0	4509	1273	4.89	

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	3932	685	1.29
	0.4	3813	730	1.38
	0.6	3645	782	1.47
	0.8	3511	829	1.56
	1.0	3357	879	1.66
	1.2	3137	941	1.77
	1.4	2982	998	1.88
	1.6	2729	1048	1.98
	1.8	2521	1095	2.07
2.0	2372	1127	2.13	
T8	0.2	4542	765	1.83
	0.4	4402	809	1.94
	0.6	4283	851	2.04
	0.8	4162	893	2.14
	1.0	4027	934	2.24
	1.2	3927	977	2.34
	1.4	3761	1017	2.43
	1.6	3596	1073	2.57
	1.8	3376	1110	2.66
2.0	3089	1165	2.79	
T9	0.2	5135	840	2.62
	0.4	5018	884	2.76
	0.6	4882	916	2.86
	0.8	4780	957	2.99
	1.0	4670	992	3.09
	1.2	4535	1031	3.22
	1.4	4464	1075	3.35
	1.6	4305	1109	3.46
	1.8	4188	1154	3.60
2.0	4102	1128	3.52	
T10	0.2	5656	926	3.56
	0.4	5524	956	3.67
	0.6	5386	985	3.78
	0.8	5281	1019	3.92
	1.0	5155	1049	4.03
	1.2	5040	1083	4.16
	1.4	4940	1117	4.29
	1.6	4800	1148	4.41
	1.8	4678	1188	4.57
2.0	4557	1209	4.65	

shaded speed tap - Gas heating airflow.

** (T1) (T2) and (T6)(T7) are part load only.

12.5 Ton • 130 MBH Gas Heat Exchanger • Standard Static Direct Drive
 Models: DHG1503DL, DHG1504DL, DHG1507DL

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2377	559	0.52
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	3178	662	0.93
	0.4	3007	705	0.99
	0.6	2856	751	1.05
	0.8	2533	822	1.16
T3	0.2	3944	784	1.59
	0.4	3783	823	1.67
	0.6	-	-	-
	0.8	-	-	-
T4	0.2	4435	842	2.08
	0.4	4287	886	2.19
	0.6	4153	922	2.28
	0.8	4025	952	2.36
T5	0.2	4719	897	2.50
	0.4	4587	929	2.59
	0.6	4458	962	2.68
	0.8	4329	993	2.77
T6**	0.2	1828	480	0.30
	0.4	1418	565	0.35
	0.6	-	-	-
	0.8	-	-	-
T7**	0.2	2150	527	0.42
	0.4	1867	601	0.48
	0.6	1628	666	0.53
	0.8	1400	724	0.58
T8	0.2	2454	570	0.56
	0.4	2253	635	0.62
	0.6	2022	698	0.68
	0.8	-	-	-
T9	0.2	2634	596	0.64
	0.4	2464	655	0.71
	0.6	2245	716	0.77
	0.8	1963	785	0.85
T10	0.2	2801	625	0.74
	0.4	2646	676	0.81
	0.6	2488	730	0.87
	0.8	2145	805	0.96

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2478	525	0.49
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	3261	616	0.87
	0.4	3134	667	0.94
	0.6	3011	717	1.01
	0.8	2786	779	1.09
T3	0.2	4019	720	1.46
	0.4	3926	756	1.53
	0.6	3807	805	1.63
	0.8	-	-	-
T4	0.2	4484	786	1.95
	0.4	4364	830	2.05
	0.6	4287	863	2.14
	0.8	4194	899	2.23
T5	0.2	4777	830	2.31
	0.4	4680	865	2.41
	0.6	4581	901	2.51
	0.8	4485	934	2.60
T6**	0.2	1946	462	0.29
	0.4	1869	607	0.38
	0.6	-	-	-
	0.8	-	-	-
T7**	0.2	2256	499	0.40
	0.4	1980	532	0.43
	0.6	1756	654	0.52
	0.8	1432	725	0.58
T8	0.2	2552	534	0.52
	0.4	2287	549	0.54
	0.6	2199	672	0.65
	0.8	1853	746	0.73
T9	0.2	2728	556	0.60
	0.4	2519	587	0.63
	0.6	2428	683	0.74
	0.8	2154	755	0.82
T10	0.2	2900	577	0.69
	0.4	2744	638	0.76
	0.6	2586	702	0.84
	0.8	2435	756	0.90

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

12.5 Ton • 130 MBH Gas Heat Exchanger • Medium Static Direct Drive

Models: DHG1503LL, DHG1504LL, DHG1507LL

DOWN FLOW					HORIZONTAL FLOW					
SPEED TAP	ESP	CFM	RPM	BHP	SPEED TAP	ESP	CFM	RPM	BHP	
T1**	0.2	2377	559	0.52	T1**	0.2	2478	525	0.49	
	0.4	-	-	-		0.4	-	-	-	-
	0.6	-	-	-		0.6	-	-	-	-
	0.8	-	-	-		0.8	-	-	-	-
	1.0	-	-	-		1.0	-	-	-	-
	1.2	-	-	-		1.2	-	-	-	-
	1.4	-	-	-		1.4	-	-	-	-
T2**	0.2	3655	740	1.32	T2**	0.2	3743	682	1.22	
	0.4	3495	782	1.40		0.4	3661	715	1.28	
	0.6	3361	820	1.46		0.6	3519	772	1.38	
	0.8	3231	857	1.53		0.8	3457	814	1.45	
	1.0	2967	915	1.63		1.0	3294	858	1.53	
	1.2	2685	969	1.73		1.2	3051	924	1.65	
	1.4	2550	1001	1.79		1.4	2667	995	1.78	
T3	0.2	3944	784	1.59	T3	0.2	4019	720	1.46	
	0.4	3783	823	1.67		0.4	3926	756	1.53	
	0.6	-	-	-		0.6	3807	805	1.63	
	0.8	-	-	-		0.8	-	-	-	-
	1.0	-	-	-		1.0	-	-	-	-
	1.2	-	-	-		1.2	-	-	-	-
	1.4	-	-	-		1.4	-	-	-	-
T4	0.2	4536	878	2.30	T4	0.2	4609	807	2.11	
	0.4	4407	910	2.38		0.4	4517	843	2.21	
	0.6	4304	939	2.46		0.6	4424	882	2.31	
	0.8	4176	974	2.55		0.8	4323	915	2.40	
	1.0	4066	1004	2.63		1.0	4216	951	2.49	
	1.2	3946	1036	2.71		1.2	4115	989	2.59	
	1.4	3826	1067	2.79		1.4	4010	1025	2.68	
T5	0.2	4719	897	2.50	T5	0.2	4777	830	2.31	
	0.4	4587	929	2.59		0.4	4680	865	2.41	
	0.6	4458	962	2.68		0.6	4581	901	2.51	
	0.8	4329	993	2.77		0.8	4485	934	2.60	
	1.0	4211	1025	2.86		1.0	4387	970	2.70	
	1.2	4087	1057	2.94		1.2	4285	1005	2.80	
	1.4	3975	1087	3.03		1.4	4184	1039	2.89	
T6**	0.2	2072	515	0.39	T6**	0.2	2181	490	0.37	
	0.4	1763	592	0.45		0.4	1930	540	0.41	
	0.6	1524	658	0.50		0.6	1632	649	0.49	
	0.8	-	-	-		0.8	1355	719	0.54	
	1.0	-	-	-		1.0	-	-	-	-
	1.2	-	-	-		1.2	-	-	-	-
	1.4	-	-	-		1.4	-	-	-	-
T7**	0.2	2712	607	0.69	T7**	0.2	2806	565	0.64	
	0.4	2553	665	0.75		0.4	2623	608	0.69	
	0.6	2339	724	0.82		0.6	2520	688	0.78	
	0.8	2056	793	0.90		0.8	2285	758	0.86	
	1.0	1860	839	0.95		1.0	2051	818	0.93	
	1.2	1712	895	1.01		1.2	1803	886	1.00	
	1.4	1479	904	1.02		1.4	1651	957	1.08	
T8	0.2	2940	640	0.82	T8	0.2	3033	593	0.76	
	0.4	2797	691	0.88		0.4	2898	651	0.83	
	0.6	2603	746	0.95		0.6	2749	702	0.90	
	0.8	2325	813	1.04		0.8	2619	766	0.98	
	1.0	2109	864	1.1		1.0	2313	815	1.04	
	1.2	1975	914	1.17		1.2	2042	873	1.1	
	1.4	1797	944	1.21		1.4	1798	909	1.2	
T9	0.2	3281	688	1.04	T9	0.2	3379	636	0.96	
	0.4	3136	733	1.11		0.4	3177	687	1.04	
	0.6	2976	779	1.18		0.6	3045	725	1.10	
	0.8	2731	838	1.27		0.8	2914	782	1.19	
	1.0	2505	892	1.35		1.0	2687	819	1.24	
	1.2	2356	933	1.41		1.2	2461	867	1.31	
	1.4	2107	944	1.43		1.4	2235	933	1.41	
T10	0.2	3586	732	1.28	T10	0.2	3697	677	1.19	
	0.4	3419	772	1.35		0.4	3487	722	1.27	
	0.6	3288	811	1.42		0.6	3346	758	1.33	
	0.8	3089	858	1.50		0.8	3228	812	1.42	
	1.0	2878	909	1.59		1.0	3136	862	1.51	
	1.2	2754	948	1.66		1.2	2969	911	1.60	
	1.4	2404	1009	1.77		1.4	2739	979	1.72	

shaded speed tap - Gas heating airflow.

** (T1) (T2) and (T6) (T7) are part load only.

12.5 Ton • 130 MBH Gas Heat Exchanger • High Static Direct Drive

Models: DHG1503WL, DHG1504WL, DHG1507WL

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2511	639	0.63
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-
T2**	0.2	3737	894	1.97
	0.4	3699	919	2.03
	0.6	3604	952	2.10
	0.8	3476	990	2.18
	1.0	3276	1035	2.28
	1.2	3052	1082	2.38
	1.4	2890	1120	2.47
	1.6	2738	1154	2.54
	1.8	2584	1186	2.61
	2.0	2499	1207	2.66
T3	0.2	3953	863	1.80
	0.4	3837	903	1.88
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-
T4	0.2	4964	1024	3.47
	0.4	4909	1046	3.55
	0.6	4808	1079	3.66
	0.8	4764	1096	3.72
	1.0	4626	1123	3.81
	1.2	4507	1167	3.96
	1.4	4409	1207	4.10
	1.6	4137	1257	4.26
	1.8	3878	1311	4.45
	2.0	3835	1332	4.52
T5	0.2	5128	1078	3.88
	0.4	5061	1102	3.96
	0.6	4965	1131	4.07
	0.8	4899	1154	4.15
	1.0	4779	1182	4.25
	1.2	4668	1214	4.37
	1.4	4583	1242	4.47
	1.6	4367	1283	4.61
	1.8	4137	1330	4.78
	2.0	4015	1356	4.88
T6**	0.2	2308	613	0.61
	0.4	2028	682	0.68
	0.6	1744	739	0.73
	0.8	1619	784	0.78
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2735	543	0.54
	0.4	2600	606	0.60
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-
T2**	0.2	4297	761	1.68
	0.4	4168	801	1.76
	0.6	4081	844	1.86
	0.8	4030	856	1.89
	1.0	3939	926	2.04
	1.2	3789	966	2.13
	1.4	3553	1033	2.27
	1.6	3290	1090	2.40
	1.8	3097	1158	2.55
	2.0	2906	1192	2.63
T3	0.2	4165	735	1.53
	0.4	4089	772	1.61
	0.6	3985	824	1.72
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-
T4	0.2	5300	888	3.01
	0.4	5215	918	3.12
	0.6	5121	951	3.23
	0.8	5044	979	3.32
	1.0	4957	1015	3.44
	1.2	4861	1040	3.53
	1.4	4769	1082	3.67
	1.6	4665	1099	3.73
	1.8	4563	1150	3.90
	2.0	4455	1181	4.01
T5	0.2	5478	900	3.05
	0.4	5390	936	3.17
	0.6	5309	971	3.29
	0.8	5216	1003	3.40
	1.0	5127	1036	3.52
	1.2	5046	1067	3.62
	1.4	4954	1096	3.72
	1.6	4872	1128	3.83
	1.8	4794	1156	3.92
	2.0	4681	1188	4.03
T6**	0.2	2644	545	0.54
	0.4	2483	620	0.61
	0.6	2299	683	0.68
	0.8	1979	773	0.77
	1.0	1758	817	0.81
	1.2	1558	877	0.87
	1.4	1448	920	0.91
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

12.5 Ton • 130 MBH Gas Heat Exchanger • High Static Direct Drive

Models: DHG1503WL, DHG1504WL, DHG1507WL

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	-	-	-
	0.4	2903	798	1.24
	0.6	2673	845	1.31
	0.8	2525	888	1.37
	1.0	2282	933	1.44
	1.2	1982	972	1.50
	1.4	1803	1007	1.56
	1.6	1671	1031	1.60
	1.8	1475	1065	1.65
	2.0	1335	1097	1.70
T8	0.2	3136	755	1.22
	0.4	3006	812	1.32
	0.6	2794	858	1.39
	0.8	2632	901	1.46
	1.0	2409	945	1.53
	1.2	2114	984	1.59
	1.4	1963	1025	1.66
	1.6	1854	1046	1.70
	1.8	-	-	-
	2.0	-	-	-
T9	0.2	3308	785	1.39
	0.4	3202	839	1.48
	0.6	3028	883	1.56
	0.8	2838	925	1.63
	1.0	2655	967	1.71
	1.2	2380	1007	1.78
	1.4	2257	1056	1.86
	1.6	2164	1076	1.90
	1.8	1994	1113	1.97
	2.0	1914	1139	2.01
T10	0.2	3472	814	1.56
	0.4	3384	865	1.65
	0.6	3244	907	1.73
	0.8	3032	948	1.81
	1.0	2886	989	1.89
	1.2	2639	1029	1.97
	1.4	2515	1083	2.07
	1.6	2411	1105	2.11
	1.8	2255	1141	2.18
	2.0	2192	1165	2.22

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	-	-	-
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	2716	928	1.44
	1.4	2495	989	1.53
	1.6	2298	1033	1.60
	1.8	2137	1076	1.66
	2.0	2078	1101	1.70
T8	0.2	3602	665	1.08
	0.4	3491	707	1.15
	0.6	3379	759	1.23
	0.8	3205	818	1.33
	1.0	3052	874	1.42
	1.2	2852	932	1.51
	1.4	2617	995	1.61
	1.6	2401	1045	1.69
	1.8	2234	1092	1.77
	2.0	2196	1112	1.80
T9	0.2	3793	691	1.22
	0.4	3667	731	1.29
	0.6	3566	780	1.38
	0.8	3441	827	1.46
	1.0	3306	887	1.57
	1.2	3114	939	1.66
	1.4	2858	1006	1.78
	1.6	2608	1066	1.88
	1.8	2426	1123	1.98
	2.0	2404	1132	2.00
T10	0.2	-	-	-
	0.4	3835	756	1.44
	0.6	3741	801	1.53
	0.8	3656	835	1.60
	1.0	3536	900	1.72
	1.2	3355	947	1.81
	1.4	3092	1015	1.94
	1.6	2821	1080	2.06
	1.8	2627	1152	2.20
	2.0	2584	1152	2.20

shaded speed tap - Gas heating airflow.

** (T1) (T2) and (T6)(T7) are part load only.

12.5 Ton • 180 MBH Gas Heat Exchanger • Standard Static Direct Drive
 Models: DHG1503DM, DHG1504DM, DHG1507DM

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2377	559	0.52
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	3178	662	0.93
	0.4	3007	705	0.99
	0.6	2856	751	1.05
	0.8	2533	822	1.16
T3	0.2	3944	784	1.59
	0.4	3783	823	1.67
	0.6	-	-	-
	0.8	-	-	-
T4	0.2	4435	842	2.08
	0.4	4287	886	2.19
	0.6	4153	922	2.28
	0.8	4025	952	2.36
T5	0.2	4719	897	2.50
	0.4	4587	929	2.59
	0.6	4458	962	2.68
	0.8	4329	993	2.77
T6**	0.2	2072	515	0.39
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T7**	0.2	2634	596	0.64
	0.4	2464	655	0.71
	0.6	2245	716	0.77
	0.8	1963	785	0.85
T8	0.2	3004	649	0.86
	0.4	2863	699	0.92
	0.6	2675	752	0.99
	0.8	-	-	-
T9	0.2	3250	684	1.02
	0.4	3106	729	1.09
	0.6	2943	776	1.16
	0.8	2694	836	1.25
T10	0.2	3474	714	1.19
	0.4	3314	759	1.27
	0.6	3178	799	1.33
	0.8	3035	841	1.40

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2478	525	0.49
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	3261	616	0.87
	0.4	3134	667	0.94
	0.6	3011	717	1.01
	0.8	2786	779	1.09
T3	0.2	4019	720	1.46
	0.4	3926	756	1.53
	0.6	3807	805	1.63
	0.8	-	-	-
T4	0.2	4484	786	1.95
	0.4	4364	830	2.05
	0.6	4287	863	2.14
	0.8	4194	899	2.23
T5	0.2	4777	830	2.31
	0.4	4680	865	2.41
	0.6	4581	901	2.51
	0.8	4485	934	2.60
T6**	0.2	2181	490	0.37
	0.4	1930	540	0.41
	0.6	-	-	-
	0.8	-	-	-
T7**	0.2	2728	556	0.60
	0.4	2519	587	0.63
	0.6	2428	683	0.74
	0.8	2154	755	0.82
T8	0.2	3097	601	0.79
	0.4	2961	712	0.94
	0.6	2776	707	0.93
	0.8	2632	763	1.01
T9	0.2	3347	632	0.94
	0.4	3147	684	1.02
	0.6	3015	723	1.08
	0.8	2882	780	1.16
T10	0.2	3605	663	1.10
	0.4	3377	708	1.18
	0.6	3240	746	1.24
	0.8	3121	801	1.34

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

12.5 Ton • 180 MBH Gas Heat Exchanger • Medium Static Direct Drive

Models: DHG1503LM, DHG1504LM, DHG1507LM

DOWN FLOW					HORIZONTAL FLOW					
SPEED TAP	ESP	CFM	RPM	BHP	SPEED TAP	ESP	CFM	RPM	BHP	
T1**	0.2	2377	559	0.52	T1**	0.2	2478	525	0.49	
	0.4	-	-	-		0.4	-	-	-	-
	0.6	-	-	-		0.6	-	-	-	-
	0.8	-	-	-		0.8	-	-	-	-
	1.0	-	-	-		1.0	-	-	-	-
	1.2	-	-	-		1.2	-	-	-	-
	1.4	-	-	-		1.4	-	-	-	-
T2**	0.2	3655	740	1.32	T2**	0.2	3743	682	1.22	
	0.4	3495	782	1.40		0.4	3661	715	1.28	
	0.6	3361	820	1.46		0.6	3519	772	1.38	
	0.8	3231	857	1.53		0.8	3457	814	1.45	
	1.0	2967	915	1.63		1.0	3294	858	1.53	
	1.2	2685	969	1.73		1.2	3051	924	1.65	
	1.4	2550	1001	1.79		1.4	2667	995	1.78	
T3	0.2	3944	784	1.59	T3	0.2	4019	720	1.46	
	0.4	3783	823	1.67		0.4	3926	756	1.53	
	0.6	-	-	-		0.6	3807	805	1.63	
	0.8	-	-	-		0.8	-	-	-	-
	1.0	-	-	-		1.0	-	-	-	-
	1.2	-	-	-		1.2	-	-	-	-
	1.4	-	-	-		1.4	-	-	-	-
T4	0.2	4536	878	2.30	T4	0.2	4609	807	2.11	
	0.4	4407	910	2.38		0.4	4517	843	2.21	
	0.6	4304	939	2.46		0.6	4424	882	2.31	
	0.8	4176	974	2.55		0.8	4323	915	2.40	
	1.0	4066	1004	2.63		1.0	4216	951	2.49	
	1.2	3946	1036	2.71		1.2	4115	989	2.59	
	1.4	3826	1067	2.79		1.4	4010	1025	2.68	
T5	0.2	4719	897	2.50	T5	0.2	4777	830	2.31	
	0.4	4587	929	2.59		0.4	4680	865	2.41	
	0.6	4458	962	2.68		0.6	4581	901	2.51	
	0.8	4329	993	2.77		0.8	4485	934	2.60	
	1.0	4211	1025	2.86		1.0	4387	970	2.70	
	1.2	4087	1057	2.94		1.2	4285	1005	2.80	
	1.4	3975	1087	3.03		1.4	4184	1039	2.89	
T6**	0.2	2379	559	0.52	T6**	0.2	2478	525	0.49	
	0.4	2161	626	0.58		0.4	2198	539	0.50	
	0.6	1927	690	0.64		0.6	2096	668	0.62	
	0.8	-	-	-		0.8	-	-	-	-
	1.0	-	-	-		1.0	-	-	-	-
	1.2	-	-	-		1.2	-	-	-	-
	1.4	-	-	-		1.4	-	-	-	-
T7**	0.2	3161	672	0.96	T7**	0.2	3256	621	0.89	
	0.4	2995	722	1.03		0.4	3060	673	0.96	
	0.6	2866	762	1.09		0.6	2927	713	1.02	
	0.8	2551	840	1.20		0.8	2787	773	1.10	
	1.0	2392	878	1.25		1.0	2516	807	1.15	
	1.2	2198	923	1.32		1.2	2205	837	1.20	
	1.4	2034	961	1.37		1.4	2046	919	1.31	
T8	0.2	3310	692	1.06	T8	0.2	3409	640	0.98	
	0.4	3163	736	1.13		0.4	3206	690	1.06	
	0.6	3006	782	1.20		0.6	3073	727	1.12	
	0.8	2765	840	1.29		0.8	2943	785	1.21	
	1.0	2540	894	1.37		1.0	2731	823	1.26	
	1.2	-	-	-		1.2	2519	873	1.3	
	1.4	-	-	-		1.4	-	-	-	-
T9	0.2	3586	732	1.28	T9	0.2	3697	677	1.19	
	0.4	3419	772	1.35		0.4	3487	722	1.27	
	0.6	3288	811	1.42		0.6	3346	758	1.33	
	0.8	3089	858	1.50		0.8	3228	812	1.42	
	1.0	2878	909	1.59		1.0	3136	862	1.51	
	1.2	2754	948	1.66		1.2	2969	911	1.60	
	1.4	-	-	-		1.4	2739	979	1.72	
T10	0.2	3834	767	1.51	T10	0.2	3963	713	1.40	
	0.4	3647	805	1.59		0.4	3752	752	1.48	
	0.6	3528	839	1.65		0.6	3607	787	1.55	
	0.8	3369	876	1.73		0.8	3497	839	1.65	
	1.0	3183	923	1.82		1.0	3398	881	1.74	
	1.2	3149	962	1.90		1.2	3217	925	1.82	
	1.4	2667	1024	2.02		1.4	3004	994	1.96	

shaded speed tap - Gas heating airflow.

** (T1) (T2) and (T6) (T7) are part load only.

12.5 Ton • 180 MBH Gas Heat Exchanger • High Static Direct Drive

Models: DHG1503WM, DHG1504WM, DHG1507WM

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2511	639	0.63
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-
T2**	0.2	3737	894	1.97
	0.4	3699	919	2.03
	0.6	3604	952	2.10
	0.8	3476	990	2.18
	1.0	3276	1035	2.28
	1.2	3052	1082	2.38
	1.4	2890	1120	2.47
	1.6	2738	1154	2.54
	1.8	2584	1186	2.61
	2.0	2499	1207	2.66
T3	0.2	3953	863	1.80
	0.4	3837	903	1.88
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-
T4	0.2	4964	1024	3.47
	0.4	4909	1046	3.55
	0.6	4808	1079	3.66
	0.8	4764	1096	3.72
	1.0	4626	1123	3.81
	1.2	4507	1167	3.96
	1.4	4409	1207	4.10
	1.6	4137	1257	4.26
	1.8	3878	1311	4.45
	2.0	3835	1332	4.52
T5	0.2	5128	1078	3.88
	0.4	5061	1102	3.96
	0.6	4965	1131	4.07
	0.8	4899	1154	4.15
	1.0	4779	1182	4.25
	1.2	4668	1214	4.37
	1.4	4583	1242	4.47
	1.6	4367	1283	4.61
	1.8	4137	1330	4.78
	2.0	4015	1356	4.88
T6**	0.2	2642	670	0.83
	0.4	2424	734	0.91
	0.6	2138	787	0.97
	0.8	2032	831	1.03
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2735	543	0.54
	0.4	2600	606	0.60
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-
T2**	0.2	4297	761	1.68
	0.4	4168	801	1.76
	0.6	4081	844	1.86
	0.8	4030	856	1.89
	1.0	3939	926	2.04
	1.2	3789	966	2.13
	1.4	3553	1033	2.27
	1.6	3290	1090	2.40
	1.8	3097	1158	2.55
	2.0	2906	1192	2.63
T3	0.2	4165	735	1.53
	0.4	4089	772	1.61
	0.6	3985	824	1.72
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-
T4	0.2	5300	888	3.01
	0.4	5215	918	3.12
	0.6	5121	951	3.23
	0.8	5044	979	3.32
	1.0	4957	1015	3.44
	1.2	4861	1040	3.53
	1.4	4769	1082	3.67
	1.6	4665	1099	3.73
	1.8	4563	1150	3.90
	2.0	4455	1181	4.01
T5	0.2	5478	900	3.05
	0.4	5390	936	3.17
	0.6	5309	971	3.29
	0.8	5216	1003	3.40
	1.0	5127	1036	3.52
	1.2	5046	1067	3.62
	1.4	4954	1096	3.72
	1.6	4872	1128	3.83
	1.8	4794	1156	3.92
	2.0	4681	1188	4.03
T6**	0.2	3038	593	0.73
	0.4	2944	646	0.80
	0.6	2790	708	0.87
	0.8	2484	795	0.98
	1.0	2287	839	1.03
	1.2	2082	906	1.12
	1.4	1935	956	1.18
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

12.5 Ton • 180 MBH Gas Heat Exchanger • High Static Direct Drive

Models: DHG1503WM, DHG1504WM, DHG1507WM

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	3338	800	1.43
	0.4	3257	846	1.51
	0.6	3135	889	1.59
	0.8	2997	928	1.66
	1.0	2772	977	1.75
	1.2	2524	1027	1.83
	1.4	2381	1057	1.89
	1.6	2249	1086	1.94
	1.8	2096	1121	2.00
2.0	2026	1147	2.05	
T8	0.2	3731	860	1.85
	0.4	3658	907	1.95
	0.6	3568	945	2.03
	0.8	3334	985	2.12
	1.0	3233	1023	2.20
	1.2	3041	1063	2.29
	1.4	2883	1118	2.41
	1.6	2729	1147	2.47
	1.8	2587	1180	2.54
2.0	2525	1203	2.59	
T9	0.2	3877	887	2.04
	0.4	3804	930	2.14
	0.6	3734	966	2.22
	0.8	3502	1005	2.31
	1.0	3416	1042	2.39
	1.2	3255	1082	2.49
	1.4	3070	1135	2.61
	1.6	2883	1168	2.68
	1.8	2743	1199	2.75
2.0	2669	1223	2.81	
T10	0.2	4016	912	2.23
	0.4	3936	952	2.33
	0.6	3878	987	2.41
	0.8	3659	1025	2.50
	1.0	3577	1060	2.59
	1.2	3443	1100	2.69
	1.4	3235	1150	2.81
	1.6	3020	1185	2.89
	1.8	2878	1215	2.97
2.0	2786	1242	3.03	

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	3805	695	1.24
	0.4	3702	740	1.32
	0.6	3604	785	1.40
	0.8	3490	833	1.49
	1.0	3390	879	1.57
	1.2	3220	935	1.67
	1.4	2939	1006	1.80
	1.6	2663	1072	1.91
	1.8	2474	1119	2.00
	2.0	2431	1134	2.03
T8	0.2	4243	753	1.62
	0.4	4111	794	1.71
	0.6	4023	836	1.80
	0.8	3970	852	1.83
	1.0	3875	921	1.98
	1.2	3719	962	2.07
	1.4	3475	1030	2.22
	1.6	3204	1090	2.35
	1.8	3009	1171	2.52
	2.0	2852	1185	2.55
T9	0.2	4392	774	1.78
	0.4	4274	814	1.87
	0.6	4186	857	1.97
	0.8	4133	864	1.98
	1.0	4050	934	2.15
	1.2	3912	974	2.24
	1.4	3695	1037	2.38
	1.6	3449	1089	2.50
	1.8	3265	1140	2.62
	2.0	3008	1205	2.77
T10	0.2	4530	794	1.94
	0.4	4433	832	2.03
	0.6	4343	875	2.14
	0.8	4276	878	2.14
	1.0	4202	947	2.31
	1.2	4083	986	2.41
	1.4	3904	1045	2.55
	1.6	3697	1085	2.65
	1.8	3534	1128	2.75
	2.0	3172	1224	2.99

shaded speed tap - Gas heating airflow.

** (T1) (T2) and (T6)(T7) are part load only.

12.5 Ton • 240 MBH Gas Heat Exchanger • Standard Static Direct Drive
 Models: DHG1503DH, DHG1504DH, DHG1507DH

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2377	559	0.52
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	3178	662	0.93
	0.4	3007	705	0.99
	0.6	2856	751	1.05
	0.8	2533	822	1.16
T3	0.2	3944	784	1.59
	0.4	3783	823	1.67
	0.6	-	-	-
	0.8	-	-	-
T4	0.2	4435	842	2.08
	0.4	4287	886	2.19
	0.6	4153	922	2.28
	0.8	4025	952	2.36
T5	0.2	4719	897	2.50
	0.4	4587	929	2.59
	0.6	4458	962	2.68
	0.8	4329	993	2.77
T6**	0.2	2227	538	0.45
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T7**	0.2	2737	611	0.70
	0.4	2580	667	0.77
	0.6	2368	726	0.83
	0.8	2085	795	0.91
T8	0.2	3190	675	0.98
	0.4	3049	722	1.05
	0.6	2880	770	1.12
	0.8	-	-	-
T9	0.2	3714	750	1.40
	0.4	3536	788	1.47
	0.6	3412	825	1.54
	0.8	3235	867	1.61
T10	0.2	4133	809	1.84
	0.4	3953	848	1.93
	0.6	3812	881	2.00
	0.8	3676	912	2.07

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2478	525	0.49
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T2**	0.2	3261	616	0.87
	0.4	3134	667	0.94
	0.6	3011	717	1.01
	0.8	2786	779	1.09
T3	0.2	4019	720	1.46
	0.4	3926	756	1.53
	0.6	3807	805	1.63
	0.8	-	-	-
T4	0.2	4484	786	1.95
	0.4	4364	830	2.05
	0.6	4287	863	2.14
	0.8	4194	899	2.23
T5	0.2	4777	830	2.31
	0.4	4680	865	2.41
	0.6	4581	901	2.51
	0.8	4485	934	2.60
T6**	0.2	2330	508	0.43
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T7**	0.2	2831	568	0.65
	0.4	2655	616	0.71
	0.6	2547	689	0.79
	0.8	2325	759	0.87
T8	0.2	3286	625	0.91
	0.4	3092	677	0.98
	0.6	2952	716	1.04
	0.8	2818	775	1.12
T9	0.2	3833	695	1.29
	0.4	3618	737	1.37
	0.6	3479	771	1.44
	0.8	3366	825	1.54
T10	0.2	4297	759	1.73
	0.4	4107	793	1.80
	0.6	3960	842	1.92
	0.8	3859	876	1.99

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

12.5 Ton • 240 MBH Gas Heat Exchanger • Medium Static Direct Drive

Models: DHG1503LH, DHG1504LH, DHG1507LH

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2377	559	0.52
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
T2**	0.2	3655	740	1.32
	0.4	3495	782	1.40
	0.6	3361	820	1.46
	0.8	3231	857	1.53
	1.0	2967	915	1.63
	1.2	2685	969	1.73
	1.4	2550	1001	1.79
T3	0.2	3944	784	1.59
	0.4	3783	823	1.67
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
T4	0.2	4536	878	2.30
	0.4	4407	910	2.38
	0.6	4304	939	2.46
	0.8	4176	974	2.55
	1.0	4066	1004	2.63
	1.2	3946	1036	2.71
	1.4	3826	1067	2.79
T5	0.2	4719	897	2.50
	0.4	4587	929	2.59
	0.6	4458	962	2.68
	0.8	4329	993	2.77
	1.0	4211	1025	2.86
	1.2	4087	1057	2.94
	1.4	3975	1087	3.03
T6**	0.2	2669	601	0.66
	0.4	2504	659	0.73
	0.6	2287	719	0.79
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
T7**	0.2	3310	692	1.06
	0.4	3163	736	1.13
	0.6	3006	782	1.20
	0.8	2765	840	1.29
	1.0	2540	894	1.37
	1.2	2390	935	1.44
	1.4	2163	988	1.52
T8	0.2	3834	767	1.51
	0.4	3647	805	1.59
	0.6	3528	839	1.65
	0.8	3369	876	1.73
	1.0	3183	923	1.82
	1.2	3149	962	1.90
	1.4	-	-	-
T9	0.2	4218	823	1.96
	0.4	4046	860	2.05
	0.6	3902	895	2.13
	0.8	3774	927	2.21
	1.0	3631	963	2.29
	1.2	3485	1000	2.38
	1.4	3327	1032	2.46
T10	0.2	4537	901	2.51
	0.4	4382	931	2.59
	0.6	4251	961	2.68
	0.8	4142	989	2.75
	1.0	4026	1019	2.84
	1.2	3906	1046	2.91
	1.4	3763	1078	3.00

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2478	525	0.49
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
T2**	0.2	3743	682	1.22
	0.4	3661	715	1.28
	0.6	3519	772	1.38
	0.8	3457	814	1.45
	1.0	3294	858	1.53
	1.2	3051	924	1.65
	1.4	2667	995	1.78
T3	0.2	4019	720	1.46
	0.4	3926	756	1.53
	0.6	3807	805	1.63
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
T4	0.2	4609	807	2.11
	0.4	4517	843	2.21
	0.6	4424	882	2.31
	0.8	4323	915	2.40
	1.0	4216	951	2.49
	1.2	4115	989	2.59
	1.4	4010	1025	2.68
T5	0.2	4777	830	2.31
	0.4	4680	865	2.41
	0.6	4581	901	2.51
	0.8	4485	934	2.60
	1.0	4387	970	2.70
	1.2	4285	1005	2.80
	1.4	4184	1039	2.89
T6**	0.2	2763	560	0.62
	0.4	2565	596	0.66
	0.6	2469	685	0.76
	0.8	2212	756	0.83
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
T7**	0.2	3409	640	0.98
	0.4	3206	690	1.06
	0.6	3073	727	1.12
	0.8	2943	785	1.21
	1.0	2731	823	1.26
	1.2	2519	873	1.34
	1.4	2284	938	1.44
T8	0.2	3963	713	1.40
	0.4	3752	752	1.48
	0.6	3607	787	1.55
	0.8	3497	839	1.65
	1.0	3398	881	1.74
	1.2	3217	925	1.8
	1.4	3004	994	2.0
T9	0.2	4404	775	1.84
	0.4	4224	807	1.92
	0.6	4087	852	2.03
	0.8	3989	888	2.11
	1.0	3865	925	2.20
	1.2	3723	963	2.29
	1.4	3608	999	2.38
T10	0.2	4777	830	2.31
	0.4	5442	854	2.38
	0.6	4581	901	2.51
	0.8	4322	934	2.60
	1.0	4387	970	2.70
	1.2	4080	1002	2.79
	1.4	3916	1037	2.89

shaded speed tap - Gas heating airflow.

** (T1) (T2) and (T6) (T7) are part load only.

12.5 Ton • 240 MBH Gas Heat Exchanger • High Static Direct Drive

Models: DHG1503WH, DHG1504WH, DHG1507WH

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2511	639	0.63
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T2**	0.2	3737	894	1.97
	0.4	3699	919	2.03
	0.6	3604	952	2.10
	0.8	3476	990	2.18
	1.0	3276	1035	2.28
	1.2	3052	1082	2.38
	1.4	2890	1120	2.47
	1.6	2738	1154	2.54
	1.8	2584	1186	2.61
2.0	2499	1207	2.66	
T3	0.2	3953	863	1.80
	0.4	3837	903	1.88
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	
T4	0.2	4964	1024	3.47
	0.4	4909	1046	3.55
	0.6	4808	1079	3.66
	0.8	4764	1096	3.72
	1.0	4626	1123	3.81
	1.2	4507	1167	3.96
	1.4	4409	1207	4.10
	1.6	4137	1257	4.26
	1.8	3878	1311	4.45
2.0	3835	1332	4.52	
T5	0.2	5128	1078	3.88
	0.4	5061	1102	3.96
	0.6	4965	1131	4.07
	0.8	4899	1154	4.15
	1.0	4779	1182	4.25
	1.2	4668	1214	4.37
	1.4	4583	1242	4.47
	1.6	4367	1283	4.61
	1.8	4137	1330	4.78
2.0	4015	1356	4.88	
T6**	0.2	2833	703	0.97
	0.4	2651	764	1.05
	0.6	2386	815	1.12
	0.8	2266	858	1.18
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
2.0	-	-	-	

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T1**	0.2	2735	543	0.54
	0.4	2600	606	0.60
	0.6	-	-	-
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-
T2**	0.2	-	-	-
	0.4	4168	801	1.76
	0.6	4081	844	1.86
	0.8	4030	856	1.89
	1.0	3939	926	2.04
	1.2	3789	966	2.13
	1.4	3553	1033	2.27
	1.6	3290	1090	2.40
	1.8	3097	1158	2.55
	2.0	2906	1192	2.63
T3	0.2	4165	735	1.53
	0.4	4089	772	1.61
	0.6	3985	824	1.72
	0.8	-	-	-
	1.0	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-
T4	0.2	-	-	-
	0.4	5215	918	3.12
	0.6	5121	951	3.23
	0.8	5044	979	3.32
	1.0	4957	1015	3.44
	1.2	4861	1040	3.53
	1.4	4769	1082	3.67
	1.6	4665	1099	3.73
	1.8	4563	1150	3.90
	2.0	4455	1181	4.01
T5	0.2	5478	900	3.05
	0.4	5390	936	3.17
	0.6	5309	971	3.29
	0.8	5216	1003	3.40
	1.0	5127	1036	3.52
	1.2	5046	1067	3.62
	1.4	4954	1096	3.72
	1.6	4872	1128	3.83
	1.8	4794	1156	3.92
	2.0	4681	1188	4.03
T6**	0.2	3259	621	0.86
	0.4	3169	667	0.92
	0.6	3032	726	1.00
	0.8	2769	805	1.11
	1.0	2588	852	1.17
	1.2	2383	918	1.27
	1.4	2201	973	1.34
	1.6	-	-	-
	1.8	-	-	-
	2.0	-	-	-

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

12.5 Ton • 240 MBH Gas Heat Exchanger • High Static Direct Drive

Models: DHG1503WH, DHG1504WH, DHG1507WH

DOWN FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	3533	825	1.62
	0.4	3449	875	1.72
	0.6	3322	916	1.80
	0.8	3103	957	1.88
	1.0	2969	997	1.96
	1.2	2734	1037	2.04
	1.4	2605	1092	2.14
	1.6	2492	1115	2.19
	1.8	2340	1151	2.26
2.0	2281	1174	2.31	
T8	0.2	3830	878	1.97
	0.4	3757	922	2.07
	0.6	3682	959	2.16
	0.8	3448	999	2.25
	1.0	3358	1036	2.33
	1.2	3188	1076	2.42
	1.4	3011	1130	2.54
	1.6	2835	1162	2.61
	1.8	-	-	-
2.0	-	-	-	
T9	0.2	4169	940	2.45
	0.4	4075	977	2.55
	0.6	4019	1009	2.63
	0.8	3828	1046	2.73
	1.0	3739	1080	2.82
	1.2	3628	1119	2.92
	1.4	3405	1164	3.04
	1.6	3171	1200	3.13
	1.8	3021	1230	3.21
2.0	2903	1262	3.30	
T10	0.2	4464	995	2.96
	0.4	4325	1025	3.05
	0.6	4238	1053	3.13
	0.8	4143	1088	3.23
	1.0	4001	1118	3.32
	1.2	3910	1155	3.43
	1.4	3708	1187	3.53
	1.6	3493	1213	3.60
	1.8	3312	1251	3.72
2.0	3137	1299	3.86	

HORIZONTAL FLOW				
SPEED TAP	ESP	CFM	RPM	BHP
T7**	0.2	-	-	-
	0.4	-	-	-
	0.6	3807	809	1.59
	0.8	3732	839	1.65
	1.0	3619	905	1.78
	1.2	3443	950	1.87
	1.4	3180	1019	2.00
	1.6	2905	1084	2.13
	1.8	2709	1161	2.28
2.0	2647	1160	2.28	
T8	0.2	4345	768	1.73
	0.4	4221	808	1.82
	0.6	4134	850	1.91
	0.8	4082	860	1.93
	1.0	3995	930	2.09
	1.2	3851	970	2.18
	1.4	3624	1035	2.33
	1.6	3368	1090	2.45
	1.8	3179	1148	2.58
2.0	2956	1199	2.70	
T9	0.2	4675	815	2.13
	0.4	4607	850	2.22
	0.6	4514	895	2.34
	0.8	4421	896	2.34
	1.0	4355	962	2.51
	1.2	4255	1001	2.61
	1.4	4126	1052	2.75
	1.6	3975	1077	2.81
	1.8	3843	1128	2.95
2.0	3566	1206	3.15	
T10	0.2	4935	851	2.53
	0.4	4889	876	2.61
	0.6	4793	927	2.76
	0.8	4667	943	2.80
	1.0	4603	993	2.95
	1.2	4527	1028	3.06
	1.4	4465	1067	3.17
	1.6	4399	1067	3.17
	1.8	4327	1145	3.40
2.0	4181	1168	3.47	

shaded speed tap - Gas heating airflow.
 **(T1) (T2) and (T6)(T7) are part load only.

7.5 Ton MODELS : DHG0903D, DHG0904D & DHG0907D with DDC Controls • Standard Static to 2.4 HP (0.2 ~ 0.8 Esp) • Down Flow

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1800	519	22	0.39	584	24	0.50	643	26	0.55	717	27	0.73	-	-	-
2000	554	26	0.46	618	27	0.58	676	29	0.63	747	31	0.84	-	-	-
2200	589	29	0.53	653	31	0.69	709	33	0.72	777	35	0.97	-	-	-
2400	624	33	0.63	687	35	0.81	743	37	0.83	807	39	1.11	-	-	-
2600	659	36	0.74	721	38	0.95	776	40	0.96	838	42	1.28	-	-	-
2800	693	40	0.86	756	42	1.11	809	44	1.10	868	46	1.47	-	-	-
3000	728	43	1.01	790	46	1.30	842	48	1.26	898	50	1.69	-	-	-
3200	763	47	1.19	824	49	1.53	875	51	1.45	928	53	1.94	-	-	-
3400	798	50	1.40	859	53	1.79	908	55	1.67	959	57	2.24	-	-	-
3600	833	53	1.64	893	57	2.10	941	59	1.92				-	-	-

Shaded area indicates air flow below 2250 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.

Valid motor operating range for DDC% setting is 20 - 90.

HORIZONTAL FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1800	456	21	0.31	541	22	0.38	610	23	0.50	684	25	0.57	-	-	-
2000	486	24	0.37	568	25	0.44	636	27	0.58	706	29	0.64	-	-	-
2200	516	27	0.43	595	29	0.50	661	30	0.66	729	32	0.72	-	-	-
2400	546	31	0.51	622	32	0.58	687	34	0.76	751	36	0.81	-	-	-
2600	576	34	0.59	649	36	0.67	712	38	0.88	774	39	0.91	-	-	-
2800	606	38	0.70	676	39	0.77	737	41	1.01	796	43	1.03	-	-	-
3000	636	41	0.82	703	43	0.88	763	45	1.16	818	47	1.16	-	-	-
3200	666	45	0.96	730	46	1.02	788	48	1.33	841	50	1.31	-	-	-
3400	696	48	1.13	757	50	1.17	814	52	1.53	863	54	1.48	-	-	-
3600	726	52	1.32	784	53	1.34	839	55	1.76	886	57	1.66	-	-	-
3800	756	55	1.55	811	57	1.55	865	59	2.03	908	61	1.88	-	-	-

Shaded area indicates air flow below 2250 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.

Valid motor operating range for DDC% setting is 20 - 90.

7.5 Ton Models : DHG0903L, DHG0904L & DHG0907L with DDC Controls • Medium Static to 2.4 HP (0.2 ~ 1.4 ESP) • Down Flow

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1400	449	16	0.28	516	17	0.36	577	18	0.41	656	20	0.55	742	24	0.66
1600	484	19	0.33	550	20	0.42	610	22	0.47	686	24	0.63	767	27	0.73
1800	519	22	0.39	584	24	0.50	643	26	0.55	717	27	0.73	793	31	0.80
2000	554	26	0.46	618	27	0.58	676	29	0.63	747	31	0.84	818	34	0.89
2200	589	29	0.53	653	31	0.69	709	33	0.72	777	35	0.97	844	38	0.98
2400	624	33	0.63	687	35	0.81	743	37	0.83	807	39	1.11	869	41	1.08
2600	659	36	0.74	721	38	0.95	776	40	0.96	838	42	1.28	895	45	1.20
2800	693	40	0.86	756	42	1.11	809	44	1.10	868	46	1.47	920	48	1.32
3000	728	43	1.01	790	46	1.30	842	48	1.26	898	50	1.69	946	52	1.46
3200	763	47	1.19	824	49	1.53	875	51	1.45	928	53	1.94	971	55	1.62
3400	798	50	1.40	859	53	1.79	908	55	1.67	959	57	2.24	997	58	1.79
3600	833	53	1.64	893	57	2.10	941	59	1.92	989	61	2.57	1022	62	1.97
3800	868	57	1.92	927	60	2.47	975	62	2.21	1019	63	2.96			

THE TABLES ARE PROVIDED FOR REFERENCE ONLY TO SHOW DDC CONTROL SETTINGS RELATIONSHIP TO UNIT CFM. BLOWER SPEED SETTINGS MUST BE SET TO MEET THE MINIMUM REQUIRED CFM OF THEIR STAGES.

DOWNFLOW

CFM	1.2			1.4			1.6			1.8			2.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1400	853	27	0.87	853	29	0.96	-	-	-	-	-	-	-	-	-
1600	871	30	0.96	876	32	1.04	-	-	-	-	-	-	-	-	-
1800	890	34	1.06	899	36	1.12	-	-	-	-	-	-	-	-	-
2000	908	37	1.17	922	39	1.22	-	-	-	-	-	-	-	-	-
2200	926	40	1.30	945	42	1.32	-	-	-	-	-	-	-	-	-
2400	945	44	1.43	968	46	1.43	-	-	-	-	-	-	-	-	-
2600	963	47	1.58	991	49	1.55	-	-	-	-	-	-	-	-	-
2800	981	50	1.75	1015	53	1.68	-	-	-	-	-	-	-	-	-
3000	1000	54	1.94	1038	56	1.82	-	-	-	-	-	-	-	-	-
3200	1018	57	2.14	1061	59	1.97	-	-	-	-	-	-	-	-	-
3400	1036	61	2.36	1084	63	2.13	-	-	-	-	-	-	-	-	-
3600	1055	63	2.61				-	-	-	-	-	-	-	-	-
3800							-	-	-	-	-	-	-	-	-

Shaded area indicates air flow below 2250 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

HORIZONTAL FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1400	396	14	0.23	487	15	0.29	559	16	0.38	639	18	0.44	702	21	0.58
1600	426	17	0.27	514	18	0.33	585	20	0.44	661	22	0.50	724	25	0.64
1800	456	21	0.31	541	22	0.38	610	23	0.50	684	25	0.57	745	28	0.70
2000	486	24	0.37	568	25	0.44	636	27	0.58	706	29	0.64	766	31	0.78
2200	516	27	0.43	595	29	0.50	661	30	0.66	729	32	0.72	787	35	0.86
2400	546	31	0.51	622	32	0.58	687	34	0.76	751	36	0.81	809	38	0.95
2600	576	34	0.59	649	36	0.67	712	38	0.88	774	39	0.91	830	42	1.05
2800	606	38	0.70	676	39	0.77	737	41	1.01	796	43	1.03	851	45	1.16
3000	636	41	0.82	703	43	0.88	763	45	1.16	818	47	1.16	872	49	1.28
3200	666	45	0.96	730	46	1.02	788	48	1.33	841	50	1.31	894	52	1.41
3400	696	48	1.13	757	50	1.17	814	52	1.53	863	54	1.48	915	55	1.56
3600	726	52	1.32	784	53	1.34	839	55	1.76	886	57	1.66	936	59	1.73
3800	756	55	1.55	811	57	1.55	865	59	2.03	908	61	1.88	957	62	1.91

CFM	1.2			1.4			1.6			1.8			2.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1400	754	25	0.85	825	27	0.93	-	-	-	-	-	-	-	-	-
1600	774	28	0.93	843	30	1.01	-	-	-	-	-	-	-	-	-
1800	795	31	1.03	862	34	1.10	-	-	-	-	-	-	-	-	-
2000	816	34	1.14	880	37	1.19	-	-	-	-	-	-	-	-	-
2200	836	38	1.26	898	40	1.29	-	-	-	-	-	-	-	-	-
2400	857	41	1.39	917	43	1.39	-	-	-	-	-	-	-	-	-
2600	878	44	1.54	935	46	1.51	-	-	-	-	-	-	-	-	-
2800	899	48	1.70	954	50	1.64	-	-	-	-	-	-	-	-	-
3000	919	51	1.88	972	53	1.77	-	-	-	-	-	-	-	-	-
3200	940	54	2.08	990	56	1.92	-	-	-	-	-	-	-	-	-
3400	961	57	2.30	1009	59	2.08	-	-	-	-	-	-	-	-	-
3600	981	61	2.54	1027	62	2.25	-	-	-	-	-	-	-	-	-
3800	1002	63	2.81				-	-	-	-	-	-	-	-	-

Shaded area indicates air flow below 2250 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

7.5 Ton Models : DHG0903W,DHG0904W & DHG0907W with DDC Controls • High Static to 3.5 HP (0.2 ~ 2.0 ESP) • Down Flow

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1800	519	22	0.39	584	24	0.50	643	26	0.55	717	27	0.73	793	31	0.80
2000	554	26	0.46	618	27	0.58	676	29	0.63	747	31	0.84	818	34	0.89
2200	589	29	0.53	653	31	0.69	709	33	0.72	777	35	0.97	844	38	0.98
2400	624	33	0.63	687	35	0.81	743	37	0.83	807	39	1.11	869	41	1.08
2600	659	36	0.74	721	38	0.95	776	40	0.96	838	42	1.28	895	45	1.20
2800	693	40	0.86	756	42	1.11	809	44	1.10	868	46	1.47	920	48	1.32
3000	728	43	1.01	790	46	1.30	842	48	1.26	898	50	1.69	946	52	1.46
3200	763	47	1.19	824	49	1.53	875	51	1.45	928	53	1.94	971	55	1.62
3400	798	50	1.40	859	53	1.79	908	55	1.67	959	57	2.24	997	58	1.79
3600	833	53	1.64	893	57	2.10	941	59	1.92	989	61	2.57	1022	62	1.97
3800	868	57	1.92	927	60	2.47	975	62	2.21	1019	64	2.96	1048	65	2.18
CFM	1.2			1.4			1.6			1.8			2.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1800	890	34	1.06	899	36	1.12	1023	39	1.42	1077	41	1.64	1129	44	1.90
2000	908	37	1.17	922	39	1.22	1036	42	1.54	1088	44	1.78	1140	47	2.06
2200	926	40	1.30	945	42	1.32	1048	46	1.66	1099	48	1.93	1151	50	2.23
2400	945	44	1.43	968	46	1.43	1060	49	1.80	1110	51	2.09	1161	53	2.41
2600	963	47	1.58	991	49	1.55	1073	52	1.95	1122	54	2.26	1172	57	2.61
2800	981	50	1.75	1015	53	1.68	1085	55	2.12	1133	58	2.45	1183	60	2.83
3000	1000	54	1.94	1038	56	1.82	1097	58	2.29	1144	61	2.65	1194	63	3.07
3200	1018	57	2.14	1061	59	1.97	1110	62	2.48	1155	64	2.87	1204	67	3.32
3400	1036	61	2.36	1084	63	2.13	1122	65	2.69	1166	67	3.11	1215	70	3.60
3600	1055	64	2.61	1107	66	2.31	1134	68	2.91	1178	71	3.37	1226	73	3.90
3800	1073	67	2.89	1130	70	2.50	1147	71	3.16	1189	74	3.65			

Shaded area indicates air flow below 2250 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.

Valid motor operating range for DDC% setting is 20 - 90.

HORIZONTAL FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1800	456	21	0.31	541	22	0.38	610	23	0.50	684	25	0.57	745	28	0.70
2000	486	24	0.37	568	25	0.44	636	27	0.58	706	29	0.64	766	31	0.78
2200	516	27	0.43	595	29	0.50	661	30	0.66	729	32	0.72	787	35	0.86
2400	546	31	0.51	622	32	0.58	687	34	0.76	751	36	0.81	809	38	0.95
2600	576	34	0.59	649	36	0.67	712	38	0.88	774	39	0.91	830	42	1.05
2800	606	38	0.70	676	39	0.77	737	41	1.01	796	43	1.03	851	45	1.16
3000	636	41	0.82	703	43	0.88	763	45	1.16	818	47	1.16	872	49	1.28
3200	666	45	0.96	730	46	1.02	788	48	1.33	841	50	1.31	894	52	1.41
3400	696	48	1.13	757	50	1.17	814	52	1.53	863	54	1.48	915	55	1.56
3600	726	52	1.32	784	53	1.34	839	55	1.76	886	57	1.66	936	59	1.73
3800	756	55	1.55	811	57	1.55	865	59	2.03	908	61	1.88	957	62	1.91
CFM	1.2			1.4			1.6			1.8			2.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1800	795	31	1.03	862	34	1.10	986	38	1.38	1040	41	1.33	1081	43	1.50
2000	816	34	1.14	880	37	1.19	992	41	1.50	1046	44	1.41	1088	46	1.59
2200	836	38	1.26	898	40	1.29	999	44	1.62	1053	47	1.50	1094	49	1.69
2400	857	41	1.39	917	43	1.39	1005	47	1.76	1059	49	1.59	1100	52	1.80
2600	878	44	1.54	935	46	1.51	1011	50	1.90	1066	52	1.69	1106	54	1.91
2800	899	48	1.70	954	50	1.64	1018	53	2.06	1072	55	1.80	1112	57	2.02
3000	919	51	1.88	972	53	1.77	1024	55	2.23	1079	58	1.91	1119	60	2.15
3200	940	54	2.08	990	56	1.92	1030	58	2.42	1085	60	2.02	1125	62	2.28
3400	961	57	2.30	1009	59	2.08	1037	61	2.62	1091	63	2.15	1131	65	2.42
3600	981	61	2.54	1027	62	2.25	1043	64	2.84	1098	66	2.28	1137	68	2.57
3800	1002	64	2.81	1046	66	2.44	1049	67	3.07	1104	69	2.42	1143	70	2.73

Shaded area indicates air flow below 2250 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.

Valid motor operating range for DDC% setting is 20 - 90.

8.5 TON HG1023D,DHG1024D & DHG1027D WITH DDC CONTROLS • STANDARD STATIC TO 2.4 HP (0.2 ~ 0.8 ESP) • DOWN FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1600										678	21	0.55	-	-	-
1800				557	21	0.42	635	23	0.57	702	25	0.62	-	-	-
2000	509	23	0.41	586	25	0.48	661	27	0.66	727	29	0.70	-	-	-
2200	541	26	0.48	615	28	0.55	688	30	0.76	752	32	0.79	-	-	-
2400	572	30	0.56	645	32	0.64	714	34	0.87	776	36	0.89	-	-	-
2600	604	34	0.66	674	36	0.73	740	38	1.00	801	40	1.01	-	-	-
2800	635	37	0.77	703	39	0.84	767	42	1.15	826	44	1.14	-	-	-
3000	667	41	0.91	733	43	0.97	793	45	1.33	850	47	1.28	-	-	-
3200	698	44	1.06	762	47	1.11	820	49	1.52	875	51	1.44	-	-	-
3400	730	48	1.25	791	50	1.28	846	53	1.75	900	55	1.63	-	-	-
3600	761	52	1.47	820	54	1.48	872	57	2.02	924	59	1.83	-	-	-
3800	793	55	1.72	850	58	1.70	899	60	2.32	949	62	2.07	-	-	-

Shaded area indicates air flow below 2550 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

HORIZONTAL FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1600										649	21	0.55	-	-	-
1800	436	20	0.33	521	21	0.41	597	23	0.46	670	25	0.62	-	-	-
2000	463	23	0.39	546	25	0.47	620	27	0.52	691	29	0.69	-	-	-
2200	491	27	0.46	571	28	0.54	642	30	0.59	711	32	0.78	-	-	-
2400	519	30	0.54	596	32	0.62	665	34	0.67	732	36	0.88	-	-	-
2600	547	34	0.63	621	35	0.72	688	37	0.75	753	39	1.00	-	-	-
2800	575	37	0.74	646	39	0.82	710	41	0.85	773	43	1.12	-	-	-
3000	602	40	0.87	671	42	0.95	733	44	0.96	794	46	1.26	-	-	-
3200	630	44	1.02	696	46	1.09	756	48	1.08	815	50	1.43	-	-	-
3400	658	47	1.20	721	49	1.25	778	51	1.21	836	54	1.61	-	-	-
3600	686	51	1.41	746	53	1.44	801	55	1.37	856	57	1.81	-	-	-
3800	714	54	1.65	771	56	1.66	823	58	1.54	877	61	2.04	-	-	-

Shaded area indicates air flow below 2550 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

8.5 Ton Models: DHG1023L,DHG1024L & DHG1027L with DDC Controls • Medium Static to 3.5 HP (0.2 ~1.4 ESP) • Down Flow

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1600										678	21	0.55	757	23	0.73
1800				557	21	0.42	635	23	0.57	702	25	0.62	778	27	0.82
2000	509	23	0.41	586	25	0.48	661	27	0.66	727	29	0.70	799	31	0.93
2200	541	26	0.48	615	28	0.55	688	30	0.76	752	32	0.79	820	35	1.04
2400	572	30	0.56	645	32	0.64	714	34	0.87	776	36	0.89	841	38	1.18
2600	604	34	0.66	674	36	0.73	740	38	1.00	801	40	1.01	862	42	1.33
2800	635	37	0.77	703	39	0.84	767	42	1.15	826	44	1.14	883	46	1.50
3000	667	41	0.91	733	43	0.97	793	45	1.33	850	47	1.28	904	50	1.69
3200	698	44	1.06	762	47	1.11	820	49	1.52	875	51	1.44	925	54	1.90
3400	730	48	1.25	791	50	1.28	846	53	1.75	900	55	1.63	946	57	2.15
3600	761	52	1.47	820	54	1.48	872	57	2.02	924	59	1.83	967	61	2.42
3800	793	55	1.72	850	58	1.70	899	60	2.32	949	62	2.07	988	65	2.73

DOWNFLOW

CFM	1.2			1.4			1.6			1.8			2.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1600	834	25	0.79	799	28	1.04	-	-	-	-	-	-	-	-	-
1800	853	29	0.88	822	32	1.14	-	-	-	-	-	-	-	-	-
2000	873	33	0.97	845	35	1.27	-	-	-	-	-	-	-	-	-
2200	892	37	1.07	868	39	1.40	-	-	-	-	-	-	-	-	-
2400	912	41	1.18	891	42	1.55	-	-	-	-	-	-	-	-	-
2600	932	45	1.31	914	46	1.71	-	-	-	-	-	-	-	-	-
2800	951	49	1.45	937	50	1.89	-	-	-	-	-	-	-	-	-
3000	971	52	1.60	960	53	2.09	-	-	-	-	-	-	-	-	-
3200	991	56	1.77	983	57	2.31	-	-	-	-	-	-	-	-	-
3400	1010	60	1.95	1006	61	2.55	-	-	-	-	-	-	-	-	-
3600	1030	64	2.16	1029	64	2.82	-	-	-	-	-	-	-	-	-
3800	1049	68	2.39	1052	68	3.11	-	-	-	-	-	-	-	-	-

Shaded area indicates air flow below 2550 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

HORIZONTAL FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1600	-	-	-	-	-	-	-	-	-	649	21	0.55	722	23	0.59
1800	436	20	0.33	521	21	0.41	597	23	0.46	670	25	0.62	740	27	0.65
2000	463	23	0.39	546	25	0.47	620	27	0.52	691	29	0.69	758	30	0.72
2200	491	27	0.46	571	28	0.54	642	30	0.59	711	32	0.78	777	34	0.80
2400	519	30	0.54	596	32	0.62	665	34	0.67	732	36	0.88	795	37	0.88
2600	547	34	0.63	621	35	0.72	688	37	0.75	753	39	1.00	814	41	0.97
2800	575	37	0.74	646	39	0.82	710	41	0.85	773	43	1.12	832	45	1.08
3000	602	40	0.87	671	42	0.95	733	44	0.96	794	46	1.26	851	48	1.19
3200	630	44	1.02	696	46	1.09	756	48	1.08	815	50	1.43	869	52	1.31
3400	658	47	1.20	721	49	1.25	778	51	1.21	836	54	1.61	888	56	1.45
3600	686	51	1.41	746	53	1.44	801	55	1.37	856	57	1.81	906	59	1.60
3800	714	54	1.65	771	56	1.66	823	58	1.54	877	61	2.04	925	63	1.77
CFM	1.2			1.4			1.6			1.8			2.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1600	787	25	0.76	830	28	0.92	-	-	-	-	-	-	-	-	-
1800	804	28	0.84	847	32	1.00	-	-	-	-	-	-	-	-	-
2000	820	32	0.93	864	35	1.08	-	-	-	-	-	-	-	-	-
2200	837	36	1.02	881	39	1.17	-	-	-	-	-	-	-	-	-
2400	854	40	1.13	898	42	1.27	-	-	-	-	-	-	-	-	-
2600	870	43	1.25	915	46	1.37	-	-	-	-	-	-	-	-	-
2800	887	47	1.38	932	49	1.49	-	-	-	-	-	-	-	-	-
3000	904	51	1.53	949	53	1.61	-	-	-	-	-	-	-	-	-
3200	920	54	1.69	966	56	1.74	-	-	-	-	-	-	-	-	-
3400	937	58	1.87	983	60	1.89	-	-	-	-	-	-	-	-	-
3600	954	62	2.06	1000	63	2.05	-	-	-	-	-	-	-	-	-
3800	971	65	2.28	1017	67	2.22	-	-	-	-	-	-	-	-	-

Shaded area indicates air flow below 2550 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

8.5 TON MODELS: DHG1023W,DHG1024W & DHG1027W WITH DDC CONTROLS • HIGH STATIC TO 3.5 HP (0.2 ~ 2.0 ESP) • DOWN FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1600										678	21	0.55	757	23	0.73
1800										557	21	0.42	635	23	0.57
2000	509	23	0.41	586	25	0.48	661	27	0.66	727	29	0.70	799	31	0.93
2200	541	26	0.48	615	28	0.55	688	30	0.76	752	32	0.79	820	35	1.04
2400	572	30	0.56	645	32	0.64	714	34	0.87	776	36	0.89	841	38	1.18
2600	604	34	0.66	674	36	0.73	740	38	1.00	801	40	1.01	862	42	1.33
2800	635	37	0.77	703	39	0.84	767	42	1.15	826	44	1.14	883	46	1.50
3000	667	41	0.91	733	43	0.97	793	45	1.33	850	47	1.28	904	50	1.69
3200	698	44	1.06	762	47	1.11	820	49	1.52	875	51	1.44	925	54	1.90
3400	730	48	1.25	791	50	1.28	846	53	1.75	900	55	1.63	946	57	2.15
3600	761	52	1.47	820	54	1.48	872	57	2.02	924	59	1.83	967	61	2.42
3800	793	55	1.72	850	58	1.70	899	60	2.32	949	62	2.07	988	65	2.73
4000	824	59	2.02	879	61	1.95	925	64	2.67	974	66	2.33	1009	69	3.08
4200	856	62	2.37	908	65	2.25	951	68	3.07	998	70	2.63	1030	73	3.47
CFM	1.2			1.4			1.6			1.8			2.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1600	834	25	0.79	799	28	1.04	872	30	1.08	945	33	1.29	1006	32	1.39
1800	853	29	0.88	822	32	1.14	894	34	1.17	965	37	1.40	1025	36	1.51
2000	873	33	0.97	845	35	1.27	916	38	1.26	986	40	1.52	1045	40	1.63
2200	892	37	1.07	868	39	1.40	938	41	1.37	1007	44	1.64	1064	44	1.77
2400	912	41	1.18	891	42	1.55	960	45	1.48	1028	47	1.78	1084	48	1.92
2600	932	45	1.31	914	46	1.71	982	49	1.61	1049	51	1.93	1103	52	2.08
2800	951	49	1.45	937	50	1.89	1004	52	1.74	1070	55	2.09	1122	57	2.25
3000	971	52	1.60	960	53	2.09	1026	56	1.88	1091	58	2.27	1142	61	2.44
3200	991	56	1.77	983	57	2.31	1048	60	2.04	1112	62	2.45	1161	65	2.64
3400	1010	60	1.95	1006	61	2.55	1070	63	2.21	1133	66	2.66	1180	69	2.86
3600	1030	64	2.16	1029	64	2.82	1092	67	2.39	1154	69	2.88	1200	73	3.10
3800	1049	68	2.39	1052	68	3.11	1114	70	2.59	1175	73	3.12			
4000	1069	72	2.64	1075	71	3.44	1136	74	2.81						
4200	1089	74	2.91	1098	74	3.80									

Shaded area indicates air flow below 2550 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

HORIZONTAL FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1600										649	21	0.55	722	23	0.59
1800	436	20	0.33	521	21	0.41	597	23	0.46	670	25	0.62	740	27	0.65
2000	463	23	0.39	546	25	0.47	620	27	0.52	691	29	0.69	758	30	0.72
2200	491	27	0.46	571	28	0.54	642	30	0.59	711	32	0.78	777	34	0.80
2400	519	30	0.54	596	32	0.62	665	34	0.67	732	36	0.88	795	37	0.88
2600	547	34	0.63	621	35	0.72	688	37	0.75	753	39	1.00	814	41	0.97
2800	575	37	0.74	646	39	0.82	710	41	0.85	773	43	1.12	832	45	1.08
3000	602	40	0.87	671	42	0.95	733	44	0.96	794	46	1.26	851	48	1.19
3200	630	44	1.02	696	46	1.09	756	48	1.08	815	50	1.43	869	52	1.31
3400	658	47	1.20	721	49	1.25	778	51	1.21	836	54	1.61	888	56	1.45
3600	686	51	1.41	746	53	1.44	801	55	1.37	856	57	1.81	906	59	1.60
3800	714	54	1.65	771	56	1.66	823	58	1.54	877	61	2.04	925	63	1.77
4000	741	58	1.94	797	60	1.91	846	62	1.74	898	64	2.30	943	67	1.96
4200	769	61	2.27	822	63	2.19	869	65	1.96	918	68	2.60	962	70	2.17
CFM	1.2			1.4			1.6			1.8			2.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1600	787	25	0.76	830	28	0.92	908	31	1.24	950	33	1.27	978	36	1.59
1800	804	28	0.84	847	32	1.00	922	35	1.35	964	37	1.35	993	39	1.69
2000	820	32	0.93	864	35	1.08	936	38	1.46	978	40	1.43	1009	42	1.79
2200	837	36	1.02	881	39	1.17	950	42	1.58	992	44	1.52	1024	46	1.90
2400	854	40	1.13	898	42	1.27	964	45	1.71	1006	47	1.62	1039	49	2.02
2600	870	43	1.25	915	46	1.37	977	48	1.85	1020	51	1.72	1054	53	2.15
2800	887	47	1.38	932	49	1.49	991	52	2.01	1033	54	1.82	1069	56	2.28
3000	904	51	1.53	949	53	1.61	1005	55	2.17	1047	58	1.93	1084	60	2.42
3200	920	54	1.69	966	56	1.74	1019	59	2.36	1061	61	2.05	1099	63	2.57
3400	937	58	1.87	983	60	1.89	1033	62	2.55	1075	65	2.18	1115	67	2.73
3600	954	62	2.06	1000	63	2.05	1047	66	2.76	1089	68	2.32	1130	70	2.90
3800	971	65	2.28	1017	67	2.22	1060	69	2.99	1103	71	2.46	1145	74	3.08
4000	987	69	2.52	1034	70	2.40	1074	73	3.24	1116	74	2.61			
4200	1004	73	2.78	1051	74	2.60									

Shaded area indicates air flow below 2550 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

10 TON MODELS: DHG1203D, DHG1204D & DHG1207D WITH DDC CONTROLS • STANDARD STATIC TO 2.4 HP (0.2 ~ 0.8 ESP) • DOWN FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
2000				582	20	0.55	644	20	0.65	712	21	0.81	-	-	-
2200	533	21	0.43	610	24	0.62	671	25	0.73	737	26	0.91	-	-	-
2400	563	25	0.49	638	28	0.70	699	29	0.82	763	30	1.03	-	-	-
2600	593	29	0.55	666	32	0.79	726	33	0.93	789	35	1.16	-	-	-
2800	622	32	0.62	694	36	0.89	754	37	1.05	814	39	1.31	-	-	-
3000	652	36	0.70	723	40	1.00	781	42	1.18	840	44	1.47	-	-	-
3200	681	40	0.79	751	44	1.13	809	46	1.33	866	48	1.66	-	-	-
3400	711	44	0.89	779	48	1.27	836	50	1.50	891	52	1.87	-	-	-
3600	740	48	1.00	807	52	1.43	864	54	1.69	917	57	2.11	-	-	-
3800	770	52	1.13	835	56	1.61	891	59	1.90	943	61	2.38	-	-	-
4000	800	56	1.27	863	60	1.82	919	63	2.15				-	-	-
4200	829	60	1.44	892	63	2.05							-	-	-

Shaded area indicates air flow below 3000 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

HORIZONTAL FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
2000							607	20	0.60	685	22	0.64	-	-	-
2200	473	19	0.42	552	21	0.48	628	24	0.68	704	26	0.71	-	-	-
2400	499	23	0.49	576	25	0.54	650	28	0.77	723	30	0.78	-	-	-
2600	525	27	0.56	600	29	0.61	671	32	0.86	742	34	0.87	-	-	-
2800	551	31	0.65	623	33	0.69	693	35	0.97	762	38	0.96	-	-	-
3000	578	35	0.74	647	37	0.77	714	39	1.10	781	42	1.06	-	-	-
3200	604	39	0.85	671	41	0.87	736	43	1.24	800	46	1.17	-	-	-
3400	630	43	0.98	695	45	0.98	757	47	1.40	819	50	1.29	-	-	-
3600	656	47	1.13	719	49	1.11	779	51	1.57	839	54	1.43	-	-	-
3800	682	51	1.30	743	53	1.25	800	55	1.78	858	58	1.58	-	-	-
4000	708	55	1.49	767	57	1.41	822	59	2.00	877	62	1.75	-	-	-
4200	734	59	1.72	791	61	1.59	843	63	2.26				-	-	-

Shaded area indicates air flow below 3000 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

10 TON MODELS: DDHG1203L, DHG1204L & DHG1207L WITH DDC CONTROLS • MEDIUM STATIC TO 3.5 HP (0.2 ~ 1.4 ESP) • DOWN FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1800													765	21	0.87
2000	504	17	0.38	582	20	0.55	644	20	0.65	712	21	0.81	788	25	0.97
2200	533	21	0.43	610	24	0.62	671	25	0.73	737	26	0.91	810	30	1.07
2400	563	25	0.49	638	28	0.70	699	29	0.82	763	30	1.03	833	34	1.18
2600	593	29	0.55	666	32	0.79	726	33	0.93	789	35	1.16	856	38	1.30
2800	622	32	0.62	694	36	0.89	754	37	1.05	814	39	1.31	878	42	1.44
3000	652	36	0.70	723	40	1.00	781	42	1.18	840	44	1.47	901	47	1.59
3200	681	40	0.79	751	44	1.13	809	46	1.33	866	48	1.66	923	51	1.76
3400	711	44	0.89	779	48	1.27	836	50	1.50	891	52	1.87	946	55	1.95
3600	740	48	1.00	807	52	1.43	864	54	1.69	917	57	2.11	969	59	2.15
3800	770	52	1.13	835	56	1.61	891	59	1.90	943	61	2.38	991	64	2.38
4000	800	56	1.27	863	60	1.82	919	63	2.15	968	66	2.68	1014	68	2.63
4200	829	60	1.44	892	64	2.05	946	67	2.42	994	70	3.02	1037	72	2.90
4400	859	64	1.62	920	68	2.31	974	72	2.73	1020	74	3.41	1059	74	3.21
4600	888	68	1.82	948	72	2.61	1001	74	3.08						
4800	918	71	2.06	976	74	2.94									
5000	947	74	2.32												

DOWNFLOW

CFM	1.2			1.4			1.6			1.8			2.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1800	867	27	1.00	887	31	1.26	-	-	-	-	-	-	-	-	-
2000	885	31	1.09	906	35	1.37	-	-	-	-	-	-	-	-	-
2200	903	35	1.18	926	38	1.48	-	-	-	-	-	-	-	-	-
2400	921	39	1.28	945	42	1.61	-	-	-	-	-	-	-	-	-
2600	939	43	1.38	965	46	1.74	-	-	-	-	-	-	-	-	-
2800	956	47	1.50	985	50	1.89	-	-	-	-	-	-	-	-	-
3000	974	51	1.62	1004	54	2.04	-	-	-	-	-	-	-	-	-
3200	992	55	1.76	1024	58	2.21	-	-	-	-	-	-	-	-	-
3400	1010	59	1.90	1044	62	2.40	-	-	-	-	-	-	-	-	-
3600	1028	63	2.06	1063	66	2.60	-	-	-	-	-	-	-	-	-
3800	1046	67	2.23	1083	70	2.81	-	-	-	-	-	-	-	-	-
4000	1064	71	2.42	1103	73	3.05	-	-	-	-	-	-	-	-	-
4200	1082	74	2.62				-	-	-	-	-	-	-	-	-
4400							-	-	-	-	-	-	-	-	-
4600							-	-	-	-	-	-	-	-	-
4800							-	-	-	-	-	-	-	-	-
5000							-	-	-	-	-	-	-	-	-

Shaded area indicates air flow below 3000 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

HORIZONTAL FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1800													740	21	0.85
2000	447	15	0.37	528	17	0.42	607	20	0.60	685	22	0.64	758	25	0.94
2200	473	19	0.42	552	21	0.48	628	24	0.68	704	26	0.71	775	29	1.04
2400	499	23	0.49	576	25	0.54	650	28	0.77	723	30	0.78	792	33	1.15
2600	525	27	0.56	600	29	0.61	671	32	0.86	742	34	0.87	809	37	1.27
2800	551	31	0.65	623	33	0.69	693	35	0.97	762	38	0.96	827	41	1.41
3000	578	35	0.74	647	37	0.77	714	39	1.10	781	42	1.06	844	45	1.56
3200	604	39	0.85	671	41	0.87	736	43	1.24	800	46	1.17	861	49	1.72
3400	630	43	0.98	695	45	0.98	757	47	1.40	819	50	1.29	879	53	1.90
3600	656	47	1.13	719	49	1.11	779	51	1.57	839	54	1.43	896	56	2.10
3800	682	51	1.30	743	53	1.25	801	55	1.78	858	58	1.58	913	60	2.32
4000	708	55	1.49	767	57	1.41	822	59	2.00	877	62	1.75	931	64	2.56
4200	734	59	1.72	791	61	1.59	844	63	2.26	896	66	1.93	948	68	2.83
4400	760	63	1.98	814	65	1.79	865	67	2.54	916	70	2.13	965	72	3.13
4600	786	67	2.28	838	69	2.02	887	71	2.87	935	74	2.36	982	74	3.46
4800	812	71	2.62	862	73	2.28	908	74	3.24						
5000	838	74	3.01												
CFM	1.2			1.4			1.6			1.8			2.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1800	810	24	0.95	848	28	1.29	-	-	-	-	-	-	-	-	-
2000	825	28	1.02	863	32	1.40	-	-	-	-	-	-	-	-	-
2200	841	32	1.11	879	36	1.51	-	-	-	-	-	-	-	-	-
2400	856	36	1.20	895	40	1.64	-	-	-	-	-	-	-	-	-
2600	871	39	1.30	910	43	1.77	-	-	-	-	-	-	-	-	-
2800	886	43	1.41	926	47	1.92	-	-	-	-	-	-	-	-	-
3000	902	47	1.53	942	51	2.08	-	-	-	-	-	-	-	-	-
3200	917	51	1.66	957	55	2.26	-	-	-	-	-	-	-	-	-
3400	932	55	1.79	973	58	2.44	-	-	-	-	-	-	-	-	-
3600	948	59	1.94	989	62	2.65	-	-	-	-	-	-	-	-	-
3800	963	63	2.11	1004	66	2.87	-	-	-	-	-	-	-	-	-
4000	978	67	2.28	1020	70	3.11	-	-	-	-	-	-	-	-	-
4200	994	71	2.47	1036	74	3.37	-	-	-	-	-	-	-	-	-
4400	1009	74	2.68				-	-	-	-	-	-	-	-	-
4600							-	-	-	-	-	-	-	-	-
4800							-	-	-	-	-	-	-	-	-
5000							-	-	-	-	-	-	-	-	-

Shaded area indicates air flow below 3000 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

10 TON MODELS: DHG1203W, DHG1204W & DHG1207W WITH DDC CONTROLS • HIGH STATIC TO 5.0 HP (0.2 ~ 2.0 ESP) • DOWN FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1800															
2000	492	20	0.40	538	9	0.48	629	14	0.68	713	17	0.80	772	21	0.79
2200	522	23	0.46	569	13	0.54	657	19	0.76	738	22	0.91	796	25	0.87
2400	552	27	0.53	600	18	0.61	684	23	0.86	763	26	1.02	820	29	0.96
2600	583	30	0.61	631	22	0.69	712	27	0.97	787	30	1.15	844	34	1.06
2800	613	33	0.71	662	27	0.78	740	32	1.10	812	35	1.30	867	38	1.18
3000	643	37	0.81	693	32	0.87	768	36	1.23	837	39	1.47	891	42	1.30
3200	673	40	0.93	724	36	0.99	796	40	1.39	862	43	1.65	915	46	1.44
3400	704	44	1.07	755	41	1.11	823	45	1.57	886	48	1.86	938	51	1.59
3600	734	47	1.24	786	45	1.25	851	49	1.77	911	52	2.10	962	55	1.76
3800	764	51	1.42	817	50	1.41	879	53	2.00	936	56	2.37	986	59	1.94
4000	794	54	1.63	847	55	1.59	907	58	2.25	961	61	2.67	1009	63	2.14
4200	825	57	1.88	878	59	1.80	935	62	2.54	985	65	3.01	1033	68	2.37
4400	855	61	2.16	909	64	2.03	962	66	2.86	1010	69	3.40	1057	72	2.62
4600	885	64	2.49	940	68	2.28	990	71	3.22	1035	74	3.83	1080	76	2.89
4800	915	68	2.86	971	73	2.58	1018	75	3.64	1060	78	4.32	1104	80	3.20
5000	945	71	3.29	1002	78	2.90	1046	80	4.10	1084	82	4.87	1128	85	3.54
CFM	1.2			1.4			1.6			1.8			2.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1800	855	24	1.04	947	29	1.15	962	28	1.16	985	31	1.21	1056	33	1.42
2000	874	28	1.14	961	33	1.25	978	32	1.26	1003	34	1.31	1071	37	1.54
2200	892	32	1.26	976	37	1.35	995	36	1.36	1021	38	1.42	1085	41	1.66
2400	911	35	1.40	991	40	1.47	1012	40	1.47	1038	42	1.54	1100	45	1.80
2600	930	39	1.54	1006	44	1.59	1028	44	1.60	1056	46	1.67	1115	49	1.95
2800	949	43	1.71	1020	48	1.72	1045	48	1.73	1074	50	1.81	1130	52	2.12
3000	968	47	1.89	1035	51	1.86	1061	52	1.87	1092	54	1.96	1145	56	2.29
3200	987	51	2.09	1050	55	2.02	1078	56	2.03	1109	58	2.12	1160	60	2.48
3400	1005	55	2.30	1064	58	2.19	1095	60	2.20	1127	62	2.30	1175	64	2.69
3600	1024	59	2.55	1079	62	2.37	1111	63	2.38	1145	66	2.49	1190	68	2.91
3800	1043	63	2.81	1094	66	2.57	1128	67	2.58	1163	70	2.69	1205	72	3.16
4000	1062	67	3.11	1109	69	2.78	1145	71	2.79	1180	73	2.92	1220	75	3.42
4200	1081	70	3.44	1123	73	3.01	1161	75	3.03	1198	77	3.16	1235	79	3.70
4400	1100	74	3.80	1138	77	3.26	1178	79	3.28	1216	81	3.42	1250	83	4.01
4600	1118	78	4.20	1153	80	3.53	1194	83	3.55	1234	85	3.71	1264	87	4.35
4800	1137	82	4.64	1167	84	3.83	1211	87	3.85	1251	89	4.02	1279	90	4.71
5000	1156	86	5.13	1182	88	4.15	1228	90	4.17						

Shaded area indicates air flow below 3000 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

HORIZONTAL FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1800										662	21	0.64	752	25	0.82
2000	445	18	0.33	509	17	0.50	606	21	0.55	681	24	0.70	769	28	0.91
2200	471	22	0.37	534	20	0.56	629	24	0.61	701	28	0.78	786	32	1.00
2400	497	25	0.42	560	24	0.63	651	28	0.67	721	32	0.86	804	35	1.11
2600	522	29	0.47	585	28	0.72	673	32	0.74	741	35	0.95	821	39	1.22
2800	548	32	0.53	610	32	0.81	695	36	0.82	761	39	1.05	838	42	1.35
3000	574	36	0.60	636	36	0.91	717	39	0.91	781	42	1.16	855	46	1.49
3200	600	39	0.68	661	40	1.03	739	43	1.00	801	46	1.28	873	49	1.65
3400	625	43	0.77	686	44	1.16	761	47	1.11	821	50	1.42	890	53	1.83
3600	651	47	0.86	712	47	1.30	783	51	1.23	841	53	1.56	907	56	2.02
3800	677	50	0.97	737	51	1.47	805	54	1.35	861	57	1.73	924	60	2.23
4000	703	54	1.10	762	55	1.66	827	58	1.50	881	60	1.91	941	63	2.46
4200	728	57	1.24	787	59	1.87	849	62	1.65	901	64	2.11	959	67	2.72
4400	754	61	1.40	813	63	2.11	871	66	1.83	921	68	2.33	976	70	3.01
4600	780	64	1.57	838	67	2.38	893	69	2.02	941	71	2.58	993	74	3.33
4800	806	68	1.77	863	70	2.68	916	73	2.23	961	75	2.85	1010	77	3.68
5000	831	72	2.00	889	74	3.02	938	77	2.47	981	78	3.15	1028	81	4.06
CFM	1.2			1.4			1.6			1.8			2.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
1800	860	31	0.96	942	29	1.24	1012	33	1.45	1050	37	1.60	1105	40	1.63
2000	873	35	1.04	952	33	1.34	1021	37	1.58	1059	40	1.73	1111	43	1.73
2200	886	38	1.13	963	36	1.45	1030	40	1.71	1067	43	1.88	1116	46	1.84
2400	900	41	1.22	973	40	1.57	1039	43	1.85	1076	47	2.03	1122	50	1.95
2600	913	44	1.32	983	43	1.70	1049	47	2.00	1084	50	2.20	1127	53	2.07
2800	926	47	1.43	993	47	1.84	1058	50	2.17	1093	53	2.39	1133	56	2.20
3000	940	50	1.55	1003	50	2.00	1067	54	2.35	1101	56	2.59	1139	59	2.34
3200	953	54	1.68	1013	54	2.16	1076	57	2.55	1110	60	2.80	1144	62	2.48
3400	966	57	1.82	1023	57	2.34	1085	60	2.76	1118	63	3.03	1150	66	2.64
3600	980	60	1.98	1033	61	2.54	1094	64	2.99	1127	66	3.29	1155	69	2.80
3800	993	63	2.14	1043	64	2.75	1103	67	3.24	1135	69	3.56	1161	72	2.97
4000	1006	66	2.32	1053	68	2.98	1112	70	3.51	1144	73	3.86	1166	75	3.16
4200	1019	70	2.51	1063	71	3.23	1122	74	3.80	1152	76	4.18	1172	78	3.35
4400	1033	73	2.72	1073	75	3.49	1131	77	4.12	1161	79	4.53	1177	82	3.56
4600	1046	76	2.95	1083	78	3.79	1140	81	4.46	1169	83	4.90	1183	85	3.78
4800	1059	79	3.19	1094	82	4.10	1149	84	4.83	1178	86	5.31	1188	88	4.01
5000	1073	82	3.46	1104	85	4.44	1158	87	5.23	1186	89	5.76	1194	90	4.26

Shaded area indicates air flow below 3000 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.

Valid motor operating range for DDC% setting is 20 - 90.

12.5 TON MODELS: DHG1503D, DHG1504D & DHG1507D WITH DDC CONTROLS • STANDARD STATIC TO 3.5 HP (0.2 ~ 0.8 ESP) • DOWN FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
2000							601	20	0.62	677	22	0.67	-	-	-
2200	537	21	0.51	595	23	0.66	627	24	0.70	700	27	0.75	-	-	-
2400	561	25	0.58	620	27	0.75	653	28	0.79	724	31	0.85	-	-	-
2600	585	29	0.65	644	31	0.84	680	33	0.89	747	35	0.96	-	-	-
2800	610	33	0.74	668	35	0.95	706	37	1.00	770	39	1.08	-	-	-
3000	634	37	0.83	692	39	1.07	733	41	1.13	793	43	1.22	-	-	-
3200	658	41	0.93	717	43	1.21	759	45	1.28	817	47	1.37	-	-	-
3400	682	45	1.05	741	47	1.36	786	49	1.44	840	51	1.55	-	-	-
3600	707	49	1.19	765	52	1.54	812	54	1.62	863	56	1.74	-	-	-
3800	731	54	1.34	789	56	1.73	838	58	1.83	886	60	1.97	-	-	-
4000	755	58	1.51	814	60	1.96	865	62	2.06	909	64	2.22	-	-	-
4200	779	62	1.70	838	64	2.20	891	66	2.33	933	68	2.50	-	-	-
4400	804	66	1.92	862	68	2.49	918	70	2.62	956	72	2.82	-	-	-
4600	828	70	2.16	886	72	2.80	944	74	2.96	979	74	3.18	-	-	-

Shaded area indicates air flow below 3750 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

HORIZONTAL FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
2000										-	-	-	-	-	-
2200										691	22	0.70	-	-	-
2400	520	23	0.57	577	18	0.62	653	24	0.66	713	26	0.77	-	-	-
2600	547	27	0.65	603	23	0.70	677	29	0.73	736	31	0.85	-	-	-
2800	574	31	0.73	630	28	0.79	700	33	0.81	759	35	0.94	-	-	-
3000	601	36	0.82	657	33	0.89	724	38	0.89	781	40	1.04	-	-	-
3200	629	40	0.93	683	38	1.00	748	42	0.99	804	45	1.15	-	-	-
3400	656	44	1.05	710	43	1.13	772	47	1.09	827	49	1.27	-	-	-
3600	683	48	1.18	736	48	1.27	796	51	1.21	849	54	1.41	-	-	-
3800	710	53	1.33	763	52	1.43	820	56	1.33	872	58	1.56	-	-	-
4000	737	57	1.50	789	57	1.62	844	60	1.47	895	63	1.72	-	-	-
4200	764	61	1.69	816	62	1.82	868	65	1.63	917	67	1.90	-	-	-
4400	791	66	1.91	842	67	2.06	892	70	1.80	940	72	2.10	-	-	-
4600	819	70	2.15	869	72	2.32	916	74	1.99	963	74	2.32	-	-	-
4800	846	74	2.42	896	74	2.61						-	-	-	

Shaded area indicates air flow below 3750 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

12.5 TON MODELS: DHG1503L, DHG1504L & DHG1507L WITH DDC CONTROLS • MEDIUM STATIC TO 3.5 HP (0.2 ~ 1.4 ESP) • DOWN FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
2200	537	21	0.51	595	23	0.66	627	24	0.70	700	27	0.76	764	29	0.87
2400	561	25	0.58	620	27	0.75	653	28	0.79	724	31	0.84	785	33	0.96
2600	585	29	0.65	644	31	0.84	680	33	0.89	747	35	0.93	806	37	1.06
2800	610	33	0.74	668	35	0.95	706	37	1.00	770	39	1.03	827	41	1.18
3000	634	37	0.83	692	39	1.07	733	41	1.13	793	43	1.14	848	45	1.30
3200	658	41	0.93	717	43	1.21	759	45	1.28	817	47	1.26	869	49	1.44
3400	682	45	1.05	741	47	1.36	786	49	1.44	840	51	1.39	890	53	1.59
3600	707	49	1.19	765	52	1.54	812	54	1.62	863	56	1.54	911	58	1.76
3800	731	54	1.34	789	56	1.73	838	58	1.83	886	60	1.70	932	62	1.94
4000	755	58	1.51	814	60	1.96	865	62	2.06	909	64	1.88	953	66	2.14
4200	779	62	1.70	838	64	2.20	891	66	2.33	933	68	2.08	974	70	2.37
4400	804	66	1.92	862	68	2.49	918	70	2.62	956	72	2.30	995	74	2.62
4600	828	70	2.16	886	72	2.80	944	74	2.96	979	74	2.54			
4800	852	74	2.44	911	74	3.16									
5000															
CFM	1.2			1.4			1.6			1.8			2.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
2200	825	31	1.09	938	42	0.93	-	-	-	-	-	-	-	-	-
2400	844	35	1.20	949	45	1.20	-	-	-	-	-	-	-	-	-
2600	863	39	1.33	961	48	1.33	-	-	-	-	-	-	-	-	-
2800	883	43	1.47	972	51	1.47	-	-	-	-	-	-	-	-	-
3000	902	48	1.62	984	54	1.62	-	-	-	-	-	-	-	-	-
3200	921	52	1.79	996	57	1.79	-	-	-	-	-	-	-	-	-
3400	940	56	1.98	1007	60	1.98	-	-	-	-	-	-	-	-	-
3600	959	60	2.19	1019	63	2.19	-	-	-	-	-	-	-	-	-
3800	978	64	2.42	1030	66	2.42	-	-	-	-	-	-	-	-	-
4000	997	68	2.67	1042	69	2.67	-	-	-	-	-	-	-	-	-
4200	1016	72	2.96	1054	72	2.96	-	-	-	-	-	-	-	-	-
4400	1036	74	3.27	1065	74	3.27	-	-	-	-	-	-	-	-	-
4600							-	-	-	-	-	-	-	-	-
4800							-	-	-	-	-	-	-	-	-
5000							-	-	-	-	-	-	-	-	-

Shaded area indicates air flow below 3750 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

HORIZONTAL FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
2200	493	18	0.51	550	13	0.55	629	19	0.60	691	22	0.70	750	23	0.83
2400	520	23	0.57	577	18	0.62	653	24	0.66	713	26	0.77	771	28	0.91
2600	547	27	0.65	603	23	0.70	677	29	0.73	736	31	0.85	793	32	1.01
2800	574	31	0.73	630	28	0.79	700	33	0.81	759	35	0.94	814	37	1.12
3000	601	36	0.82	657	33	0.89	724	38	0.89	781	40	1.04	835	42	1.23
3200	629	40	0.93	683	38	1.00	748	42	0.99	804	45	1.15	857	46	1.36
3400	656	44	1.05	710	43	1.13	772	47	1.09	827	49	1.27	878	51	1.51
3600	683	48	1.18	736	48	1.27	796	51	1.21	849	54	1.41	900	55	1.67
3800	710	53	1.33	763	52	1.43	820	56	1.33	872	58	1.56	921	60	1.84
4000	737	57	1.50	789	57	1.62	844	60	1.47	895	63	1.72	942	65	2.03
4200	764	61	1.69	816	62	1.82	868	65	1.63	917	67	1.90	964	69	2.25
4400	791	66	1.91	842	67	2.06	892	70	1.80	940	72	2.10	985	74	2.48
4600	819	70	2.15	869	72	2.32	916	74	1.99	963	74	2.32			
4800	846	74	2.42	896	74	2.61									
5000															
CFM	1.2			1.4			1.6			1.8			2.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
2200	804	28	1.06	862	27	1.24	-	-	-	-	-	-	-	-	-
2400	825	32	1.17	881	32	1.37	-	-	-	-	-	-	-	-	-
2600	845	36	1.29	900	37	1.52	-	-	-	-	-	-	-	-	-
2800	866	41	1.42	919	41	1.68	-	-	-	-	-	-	-	-	-
3000	887	45	1.57	938	46	1.85	-	-	-	-	-	-	-	-	-
3200	907	49	1.74	957	51	2.05	-	-	-	-	-	-	-	-	-
3400	928	54	1.92	976	55	2.26	-	-	-	-	-	-	-	-	-
3600	948	58	2.13	995	60	2.50	-	-	-	-	-	-	-	-	-
3800	969	62	2.35	1013	65	2.76	-	-	-	-	-	-	-	-	-
4000	989	66	2.60	1032	69	3.05	-	-	-	-	-	-	-	-	-
4200	1010	71	2.87	1051	74	3.38	-	-	-	-	-	-	-	-	-
4400	1030	74	3.17				-	-	-	-	-	-	-	-	-
4600							-	-	-	-	-	-	-	-	-
4800							-	-	-	-	-	-	-	-	-
5000							-	-	-	-	-	-	-	-	-

Shaded area indicates air flow below 3750 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

12.5 TON MODELS: DHG1503W, DHG1504W & DHG1507W WITH DDC CONTROLS • HIGH STATIC TO 5.0 HP (0.2 ~ 2.0 ESP) • DOWN FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
2400	635	29	0.78	732	33	1.02	812	38	1.06	877	41	1.32	945	43	1.45
2600	667	33	0.89	758	37	1.14	835	41	1.18	898	44	1.46	964	46	1.58
2800	699	37	1.03	785	41	1.29	859	45	1.30	919	47	1.61	982	50	1.71
3000	731	41	1.18	811	44	1.45	882	48	1.44	939	51	1.78	1000	53	1.85
3200	763	45	1.36	838	48	1.64	906	52	1.59	960	54	1.97	1018	57	2.00
3400	795	49	1.56	864	52	1.85	929	55	1.75	980	57	2.18	1036	60	2.17
3600	827	53	1.80	891	55	2.09	953	59	1.94	1001	61	2.40	1055	64	2.35
3800	859	57	2.07	917	59	2.35	976	62	2.14	1021	64	2.66	1073	67	2.55
4000	891	61	2.38	944	62	2.65	1000	65	2.37	1042	67	2.94	1091	70	2.76
4200	923	64	2.74	970	66	2.99	1023	69	2.62	1063	71	3.25	1109	74	2.99
4400	955	68	3.15	997	70	3.37	1047	72	2.89	1083	74	3.59	1128	77	3.24
4600	987	72	3.62	1023	73	3.80	1070	76	3.20	1104	77	3.96	1146	81	3.51
4800	1019	76	4.16	1050	77	4.28	1094	79	3.53	1124	81	4.38	1164	84	3.80
5000	1051	80	4.79	1076	81	4.83	1117	83	3.91	1145	84	4.84	1182	88	4.12

DOWNFLOW

CFM	1.2			1.4			1.6			1.8			2.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
2400	1010	47	1.84	1065	50	2.10	1102	52	2.13	1159	55	2.30	1193	56	2.70
2600	1027	51	1.99	1081	53	2.28	1121	55	2.31	1179	58	2.49	1213	60	2.93
2800	1044	54	2.16	1097	56	2.47	1139	59	2.51	1199	62	2.70	1233	63	3.17
3000	1061	57	2.34	1112	59	2.68	1158	62	2.71	1219	65	2.93	1252	66	3.43
3200	1077	60	2.53	1128	62	2.90	1176	65	2.94	1240	68	3.17	1272	70	3.72
3400	1094	63	2.74	1144	65	3.14	1195	68	3.18	1260	72	3.44	1291	73	4.03
3600	1111	66	2.97	1159	69	3.40	1213	72	3.45	1280	75	3.72	1311	76	4.37
3800	1128	70	3.22	1175	72	3.68	1232	75	3.74	1300	78	4.03	1331	80	4.73
4000	1145	73	3.49	1191	75	3.99	1250	78	4.05	1321	82	4.37	1350	83	5.12
4200	1161	76	3.78	1206	78	4.32	1269	81	4.39	1341	85	4.73			
4400	1178	79	4.09	1222	81	4.68	1288	85	4.75	1361	89	5.12			
4600	1195	82	4.43	1238	84	5.07									
4800	1212	85	4.80												
5000															

Shaded area indicates air flow below 3750 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

HORIZONTAL FLOW

CFM	0.2			0.4			0.6			0.8			1.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
2400	509	23	0.44	590	24	0.66	674	27	0.86	767	32	0.98	838	35	0.95
2600	534	26	0.49	613	28	0.74	694	31	0.97	782	36	1.08	851	39	1.03
2800	560	30	0.56	635	32	0.83	714	35	1.10	797	39	1.19	865	42	1.12
3000	586	34	0.63	657	36	0.94	734	39	1.23	811	42	1.32	878	45	1.21
3200	612	38	0.71	680	40	1.06	754	42	1.39	826	46	1.46	891	49	1.31
3400	638	42	0.80	702	44	1.19	774	46	1.57	841	49	1.61	904	52	1.42
3600	664	46	0.90	724	48	1.35	793	50	1.77	856	53	1.78	918	56	1.54
3800	690	50	1.01	747	51	1.52	813	54	2.00	870	56	1.97	931	59	1.67
4000	716	53	1.14	769	55	1.71	833	57	2.25	885	60	2.18	944	62	1.80
4200	742	57	1.29	792	59	1.93	853	61	2.54	900	63	2.40	957	65	1.95
4400	768	61	1.45	814	63	2.18	873	65	2.86	915	67	2.66	971	69	2.12
4600	793	65	1.64	836	67	2.45	893	68	3.22	930	70	2.94	984	72	2.29
4800	819	69	1.85	859	71	2.77	913	72	3.64	944	74	3.25	997	76	2.48
5000	845	73	2.08	881	75	3.12	932	76	4.10	959	77	3.59	1010	79	2.69
5200	871	76	2.35	903	78	3.52	952	80	4.62	974	81	3.96	1024	82	2.92
5400	897	80	2.65	926	82	3.97	972	83	5.21	989	84	4.38	1037	86	3.16
5600	923	84	2.99	948	86	4.47	992	87	5.88	1003	87	4.84	1050	89	3.42
CFM	1.2			1.4			1.6			1.8			2.0		
	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP	RPM	DDC %	BHP
2400	908	38	1.20	979	42	1.45	1053	43	1.59	1114	45	1.86	1134	47	1.87
2600	919	42	1.30	988	45	1.57	1059	47	1.69	1119	49	1.97	1139	50	1.98
2800	929	45	1.41	997	48	1.70	1064	50	1.79	1123	52	2.09	1144	54	2.11
3000	940	48	1.53	1007	51	1.85	1070	53	1.90	1127	55	2.22	1150	57	2.24
3200	951	51	1.66	1016	54	2.00	1075	56	2.02	1131	58	2.36	1155	60	2.37
3400	961	54	1.79	1025	57	2.17	1081	60	2.14	1135	62	2.51	1161	64	2.52
3600	972	58	1.94	1035	61	2.35	1086	63	2.28	1139	65	2.66	1166	67	2.68
3800	983	61	2.11	1044	64	2.54	1092	66	2.42	1143	68	2.83	1172	70	2.84
4000	993	64	2.28	1053	67	2.75	1097	70	2.57	1148	72	3.00	1177	73	3.02
4200	1004	67	2.47	1063	70	2.98	1103	73	2.73	1152	75	3.19	1183	77	3.20
4400	1014	71	2.68	1072	73	3.23	1108	76	2.89	1156	78	3.38	1188	80	3.40
4600	1025	74	2.90	1081	77	3.50	1114	79	3.07	1160	81	3.59	1194	83	3.61
4800	1036	77	3.14	1091	80	3.79	1119	83	3.26	1164	85	3.81	1199	86	3.84
5000	1046	80	3.40	1100	83	4.11	1125	86	3.46	1168	88	4.05	1205	90	4.07
5200	1057	83	3.69	1109	86	4.45	1130	89	3.68						
5400	1068	87	3.99	1119	89	4.82									
5600	1078	90	4.33												

Shaded area indicates air flow below 3750 SCFM (300 SCFM/ton) that is not recommended for High Stage cooling or heating.
Valid motor operating range for DDC% setting is 20 - 90.

Static Pressure

7.5-12.5 TONS		
DOWNFLOW ECONOMIZER PRESSURE DROP		
Cabinet	CFM	SP in.wg.
7.5 Ton	2250	.04"
	3000	.07"
	3750	.11"
8.5 Ton	2550	.06"
	3400	.10"
	4250	.16"
10 Ton	3000	.08"
	4000	.13"
	5000	.22"
12.5 Ton	3750	.14"
	5000	.24"
	6250	.36"

7.5-12.5 TONS		
HORIZONTAL ECONOMIZER PRESSURE DROP		
Cabinet	CFM	SP in.wg.
7.5 Ton	2250	.05"
	3000	.07"
	3750	.13"
8.5 Ton	2550	.07"
	3400	.13"
	4250	.18"
10 Ton	3000	.07"
	4000	.12"
	5000	.19"
12.5 Ton	3750	.09"
	5000	.15"
	6250	.24"

Electrical Data


Model Number	Electrical Rating	Compressor			Outdoor Fan Motor			Indoor Fan Motor			Optional Powered Convenience Outlet	Optional Power Exhaust	Power Supply	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	FLA	FLA	MCA	MOP
DHG0903D	208/230/3/60	2	12.2	120	2	0.33	2.0	1	2.4	8.0	-	-	39.4/39.4	50/50
											9.6/8.7	-	49.0/48.1	60/60
											-	3.3/3.0 (2.4)	42.7/42.4	50/50
DHG0903L	208/230/3/60	2	12.2	120	2	0.33	2.0	1	2.4	8.0	9.6/8.7	-	49.0/48.1	60/60
											-	3.3/3.0 (2.4)	42.7/42.4	50/50
											9.6/8.7	3.3/3.0 (2.4)	52.3/51.1	60/60
DHG0903W	208/230/3/60	2	12.2	120	2	0.33	2.0	1	3.5	10.9	-	-	42.3/42.3	50/50
											9.6/8.7	-	51.9/51.0	60/60
											-	3.3/3.0 (2.4)	45.6/45.3	50/50
DHG0904D	460/3/60	2	5.8	55.1	2	0.33	0.85	1	2.4	5.4	-	-	20.1	25
											4.3	-	24.4	30
											-	1.2 (1.0)	21.3	25
DHG0904L	460/3/60	2	5.8	55.1	2	0.33	0.85	1	2.4	5.4	4.3	-	24.4	30
											-	1.2 (1.0)	21.3	25
											4.3	1.2 (1.0)	25.6	30
DHG0904W	460/3/60	2	5.8	55.1	2	0.33	0.85	1	3.5	7.2	-	-	21.9	25
											4.3	-	26.2	30
											-	1.2 (1.0)	23.1	30
DHG0907D	575/3/60	2	5.8	41.0	2	0.33	0.67	1	2.4	4.0	4.3	1.2 (1.0)	27.4	30
											-	-	18.3	20
											3.5	-	21.8	25
DHG0907L	575/3/60	2	5.8	41.0	2	0.33	0.67	1	2.4	4.0	-	-	18.3	20
											3.5	-	21.8	25
											-	1.3	19.6	25
DHG0907W	575/3/60	2	5.8	41.0	2	0.33	0.67	1	3.5	5.0	3.5	1.3	23.1	25
											-	-	19.3	25
											3.5	-	22.8	25
DHG1023D	208/230/3/60	2	14.1	120	2	0.33	2.0	1	2.4	8.0	-	-	43.7/43.7	50/50
											9.6/8.7	-	53.3/52.4	60/60
											-	3.3/3.0 (2.4)	47.0/46.7	60/60
DHG1023L	208/230/3/60	2	14.1	120	2	0.33	2.0	1	3.5	10.9	9.6/8.7	-	46.6/46.6	60/60
											-	3.3/3.0 (2.4)	49.9/49.6	60/60
											9.6/8.7	3.3/3.0 (2.4)	59.5/58.3	70/70
DHG1023W	208/230/3/60	2	14.1	120	2	0.33	2.0	1	3.5	10.9	-	-	46.6/46.6	60/60
											9.6/8.7	-	56.2/55.3	70/60
											-	3.3/3.0 (2.4)	49.9/49.6	60/60
DHG1024D	460/3/60	2	6.4	55.1	2	0.33	0.85	1	2.4	5.4	9.6/8.7	3.3/3.0 (2.4)	59.5/58.3	70/70
											-	-	21.5	25
											4.3	-	25.8	30
DHG1024L	460/3/60	2	6.4	55.1	2	0.33	0.85	1	3.5	7.2	-	-	23.3	30
											4.3	-	27.6	35
											-	1.2 (1.0)	24.5	30
											4.3	1.2 (1.0)	28.8	35

Electrical Data

Model Number	Electrical Rating	Compressor			Outdoor Fan Motor			Indoor Fan Motor			Optional Powered Convenience Outlet	Optional Power Exhaust	Power Supply	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	FLA	FLA	MCA	MOP
DHG1024W	460/3/60	2	6.4	55.1	2	0.33	0.85	1	3.5	7.2	-	-	23.3	30
											4.3	-	27.6	35
											-	1.2 (1.0)	24.5	30
											4.3	1.2 (1.0)	28.8	35
DHG1027D	575/3/60	2	5.1	41.0	2	0.33	0.67	1	2.4	4.0	-	-	16.9	20
											3.5	-	20.4	25
											-	1.3	18.2	20
											3.5	1.3	21.7	25
DHG1027L	575/3/60	2	5.1	41.0	2	0.33	0.67	1	3.5	5.0	-	-	17.9	20
											3.5	-	21.4	25
											-	1.3	19.2	20
											3.5	1.3	22.7	25
DHG1027W	575/3/60	2	5.1	41.0	2	0.33	0.67	1	3.5	5.0	-	-	17.9	20
											3.5	-	21.4	25
											-	1.3	19.2	20
											3.5	1.3	22.7	25
DHG1203D	208/230/3/60	2	15.4	156	2	0.33	2.0	1	2.4	8.0	-	-	46.6/46.6	60/60
											9.6/8.7	-	56.2/55.3	70/70
											-	3.3/3.0 (2.4)	49.9/49.6	60/60
											9.6/8.7	3.3/3.0 (2.4)	59.5/58.3	70/70
DHG1203L	208/230/3/60	2	15.4	156	2	0.33	2.0	1	3.5	10.9	-	-	49.5/49.5	60/60
											9.6/8.7	-	59.1/58.2	70/70
											-	3.3/3.0 (2.4)	52.8/52.5	60/60
											9.6/8.7	3.3/3.0 (2.4)	62.4/61.2	70/70
DHG1203W	208/230/3/60	2	15.4	156	2	0.33	2.0	1	5.0	14.5	-	-	53.1/53.1	60/60
											9.6/8.7	-	62.7/61.8	70/70
											-	3.3/3.0 (2.4)	56.4/56.1	70/70
											9.6/8.7	3.3/3.0 (2.4)	66.0/64.8	80/80
DHG1204D	460/3/60	2	7.7	69.0	2	0.33	0.85	1	2.4	5.4	-	-	24.4	30
											4.3	-	28.7	35
											-	1.2 (1.0)	25.6	30
											4.3	1.2 (1.0)	29.9	35
DHG1204L	460/3/60	2	7.7	69.0	2	0.33	0.85	1	3.5	7.2	-	-	26.2	30
											4.3	-	30.5	35
											-	1.2 (1.0)	27.4	35
											4.3	1.2 (1.0)	31.7	35
DHG1204W	460/3/60	2	7.7	69.0	2	0.33	0.85	1	5.0	10.6	-	-	29.6	40
											4.3	-	33.9	45
											-	1.2 (1.0)	30.8	40
											4.3	1.2 (1.0)	35.1	45
DHG1207D	575/3/60	2	6.4	47.8	2	0.33	0.67	1	2.4	4.0	-	-	19.7	25
											3.5	-	23.2	25
											-	1.3	21.0	25
											3.5	1.3	24.5	30
DHG1207L	575/3/60	2	6.4	47.8	2	0.33	0.67	1	3.5	5.0	-	-	20.7	25
											3.5	-	24.2	30
											-	1.3	22.0	25
											3.5	1.3	25.5	30
DHG1207W	575/3/60	2	6.4	47.8	2	0.33	0.67	1	5.0	7.2	-	-	22.9	30
											3.5	-	26.4	30
											-	1.3	24.2	30
											3.5	1.3	27.7	35
DHG1503D	208/230/3/60	2	19.2	157	2	0.33	3.5	1	3.5	10.9	-	-	61.1/61.1	80/80
											9.6/8.7	-	70.7/69.8	80/80
											-	3.3/3.0 (2.4)	64.4/64.1	80/80
											9.6/8.7	3.3/3.0 (2.4)	74.0/72.8	90/90

Electrical Data


Model Number	Electrical Rating	Compressor			Outdoor Fan Motor			Indoor Fan Motor			Optional Powered Convenience Outlet	Optional Power Exhaust	Power Supply	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	FLA	FLA	MCA	MOP
DHG1503L	208/230/3/60	2	19.2	157	2	0.33	3.5	1	3.5	10.9	-	-	61.1/61.1	80/80
											9.6/8.7	-	70.7/69.8	80/80
											-	3.3/3.0 (2.4)	64.4/64.1	80/80
											9.6/8.7	3.3/3.0 (2.4)	74.0/72.8	90/90
DHG1503W	208/230/3/60	2	19.2	157	2	0.33	3.5	1	5.0	14.5	-	-	64.7/64.7	80/80
											9.6/8.7	-	74.3/73.4	90/90
											-	3.3/3.0 (2.4)	68.0/67.7	80/80
											9.6/8.7	3.3/3.0 (2.4)	77.6/76.4	90/90
DHG1504D	460/3/60	2	9.0	74.8	2	0.33	1.6	1	3.5	7.2	-	-	30.6	35
											4.3	-	34.9	40
											-	1.2 (1.0)	31.8	40
											4.3	1.2 (1.0)	36.1	40
DHG1504L	460/3/60	2	9.0	74.8	2	0.33	1.6	1	3.5	7.2	-	-	30.6	35
											4.3	-	34.9	40
											-	1.2 (1.0)	31.8	40
											4.3	1.2 (1.0)	36.1	40
DHG1504W	460/3/60	2	9.0	74.8	2	0.33	1.6	1	5.0	10.6	-	-	34.0	40
											4.3	-	38.3	45
											-	1.2 (1.0)	35.2	45
											4.3	1.2 (1.0)	39.5	50
DHG1507D	575/3/60	2	7.0	53.9	2	0.33	1.54	1	3.5	5.0	-	-	23.9	30
											3.5	-	27.4	30
											-	1.3	25.2	30
											3.5	1.3	28.7	35
DHG1507L	575/3/60	2	7.0	53.9	2	0.33	1.54	1	3.5	5.0	-	-	23.9	30
											3.5	-	27.4	30
											-	1.3	25.2	30
											3.5	1.3	28.7	35
DHG1507W	575/3/60	2	7.0	53.9	2	0.33	1.54	1	5.0	7.2	-	-	26.1	30
											3.5	-	29.6	35
											-	1.3	27.4	30
											3.5	1.3	30.9	35

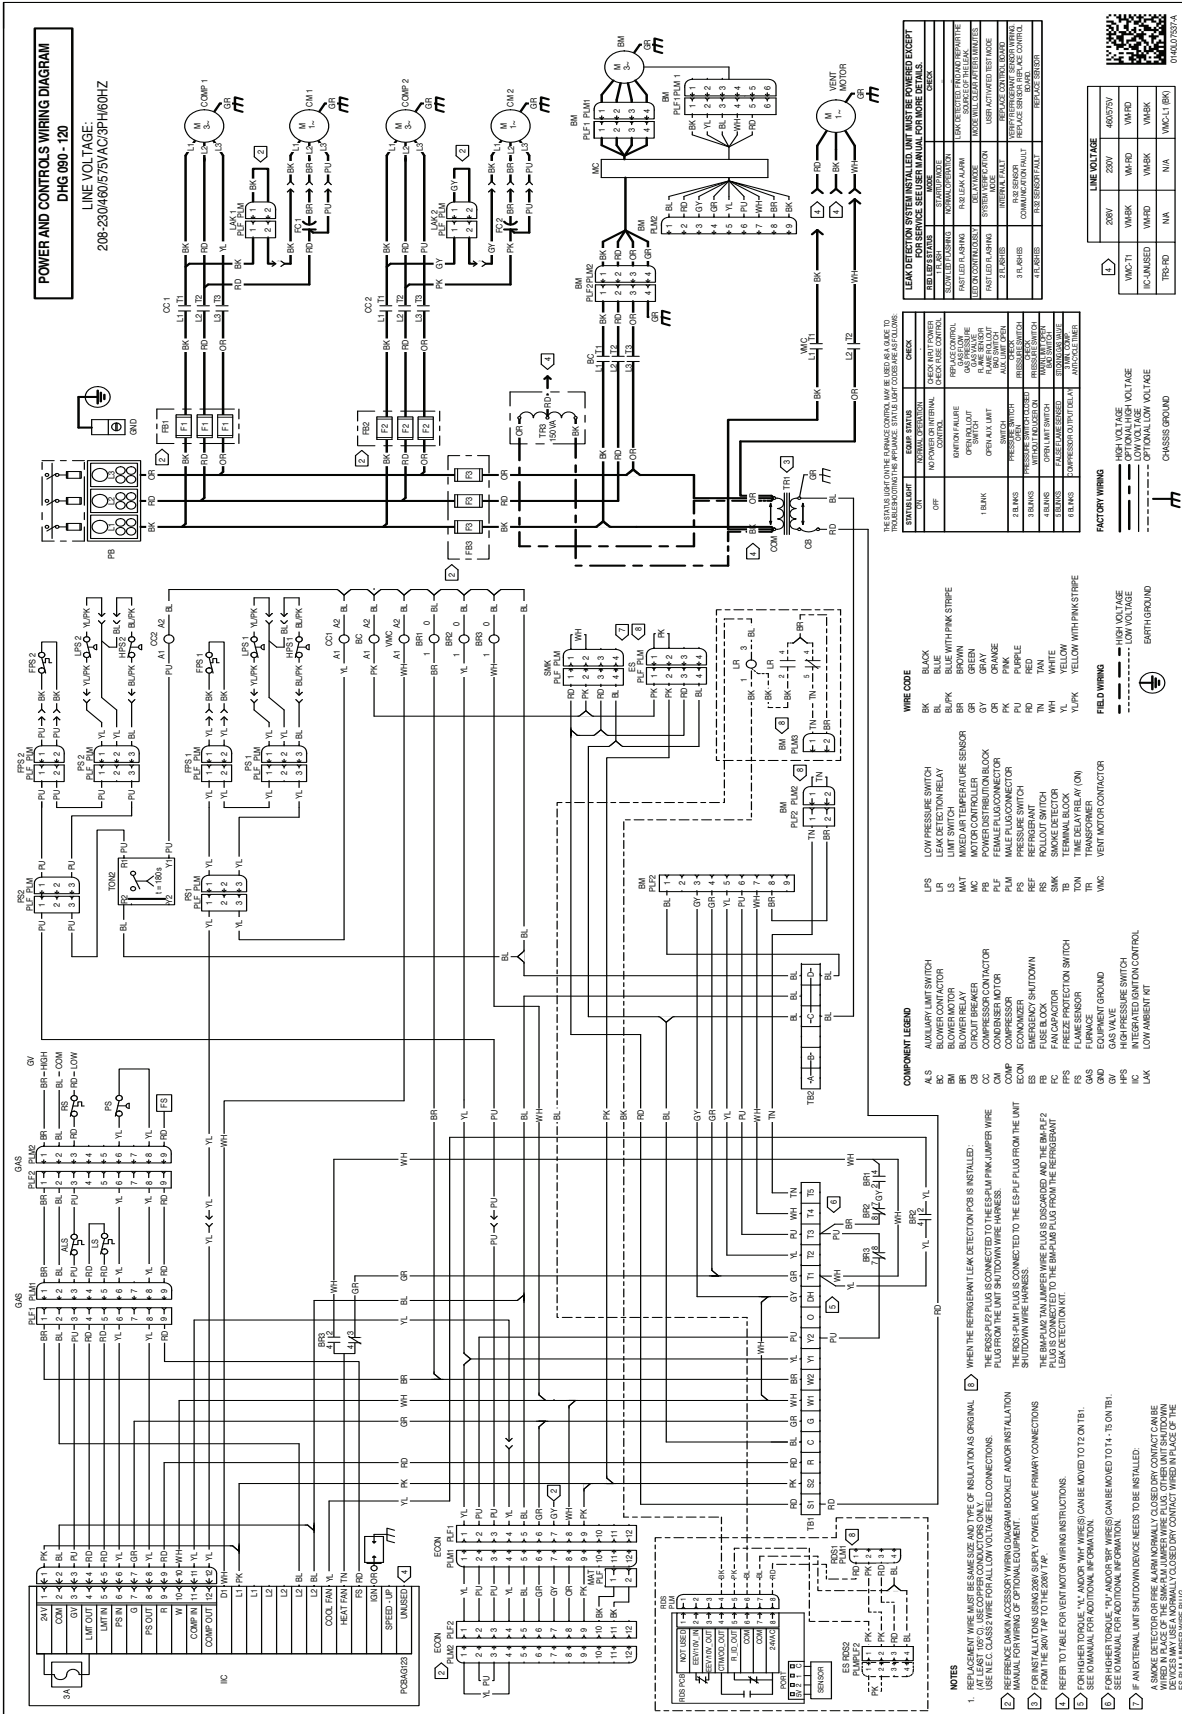

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

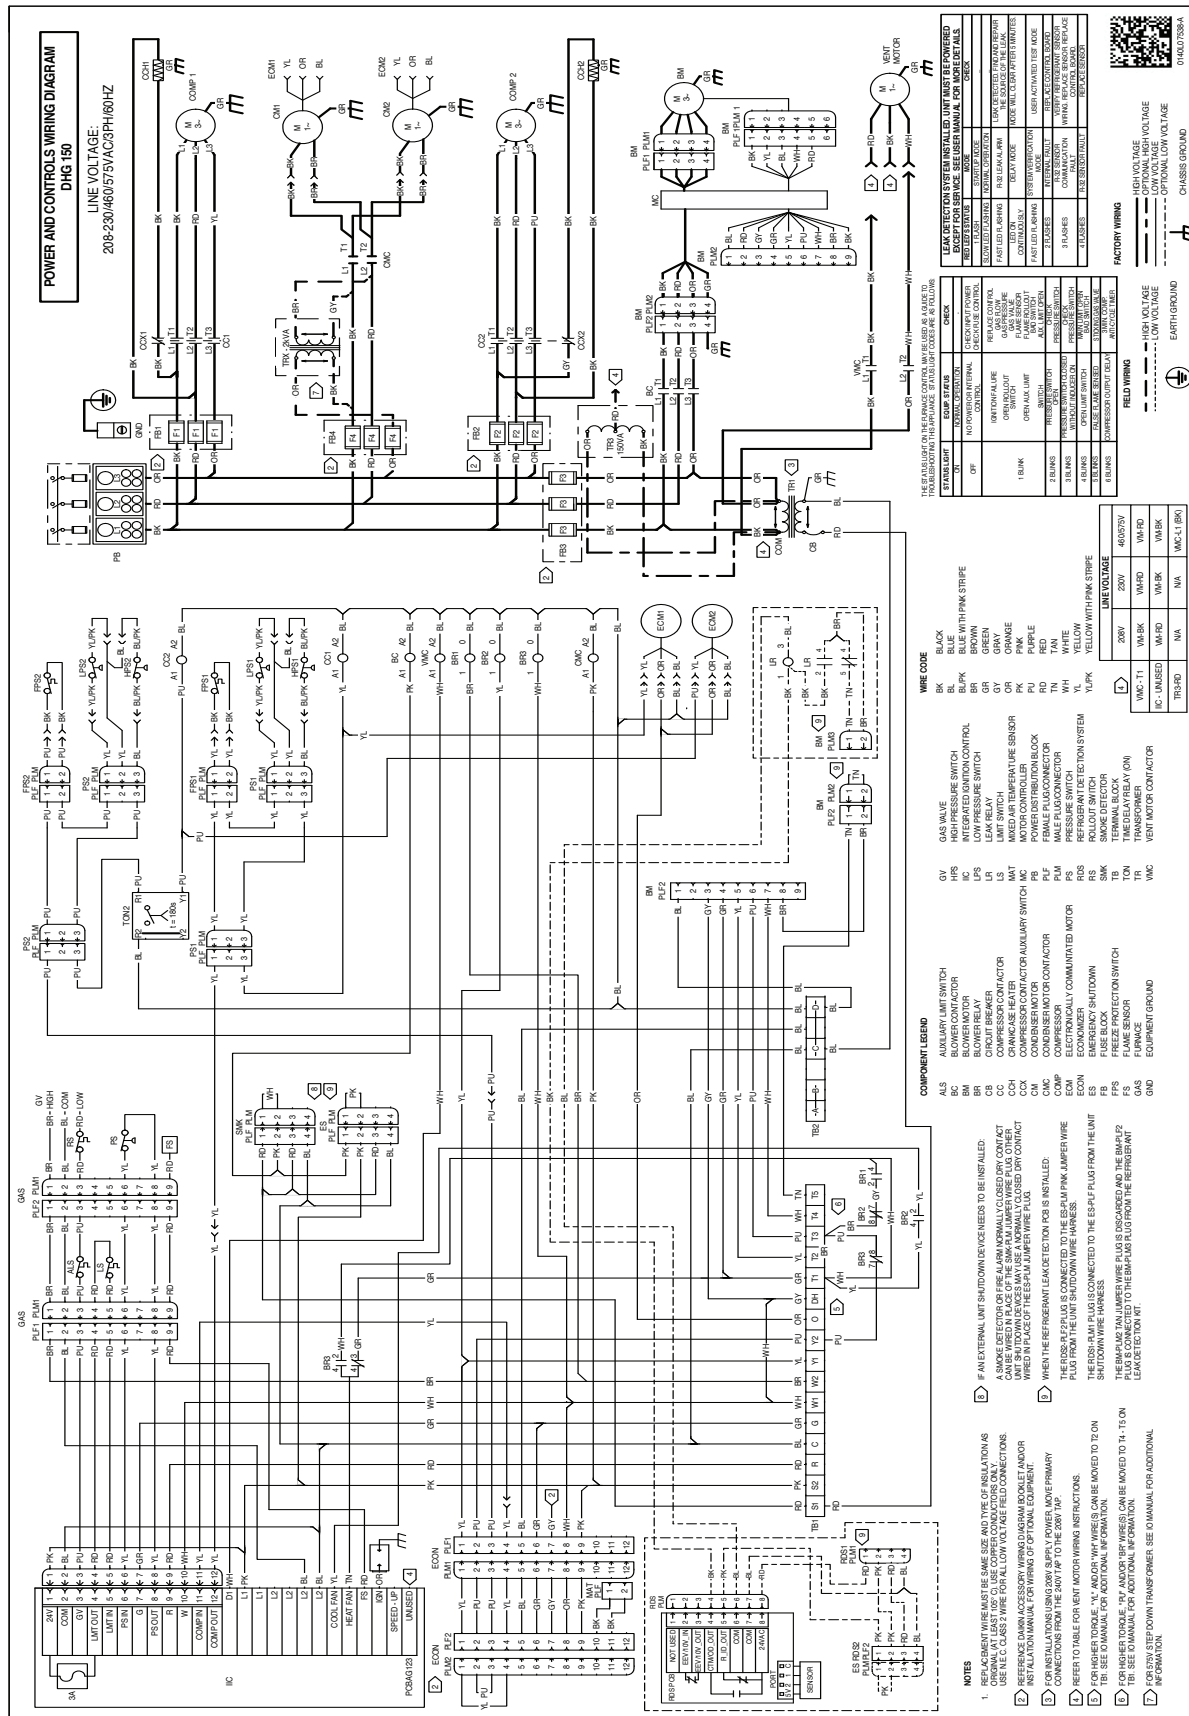

POWER AND CONTROLS WIRING DIAGRAM DHG 150

LINE VOLTAGE:
208-230/460/575VAC/3PH/60HZ

COMPONENT	WIRE COLOR
SMK	RED
TR	GREEN
TS	BLUE
TN	ORANGE
TS	YELLOW
TR	PINK
TS	GRAY

WIRE COLOR	FUNCTION
RED	HIGH VOLTAGE
BROWN	LOW VOLTAGE
GRAY	OPTIONAL LOW VOLTAGE

WIRE CODE	FUNCTION
OV	AUXILIARY LIMIT SWITCH
MC	MOTOR CONTROLLER
LS	LOW PRESSURE SWITCH
LPS	LEAK RELAY
LR	INTEGRATED AUTOMATIC CONTROL
OR	ORANGE
P	PHASE
PW	WINDING
PU	PURGE VALVE
RS	SMOKE DETECTOR
SMK	SMOKE DETECTOR
TR	TRANSFORMER
TRN	THERMAL PROTECT (ON)
VMC	VENT MOTOR CONTACTOR

COMPONENT	FUNCTION
ALS	AUXILIARY LIMIT SWITCH
BM	BLUETOOTH MODULE
BR	BLOWER MOTOR
CB	CIRCUIT BREAKER
COX	COIL EXHAUST FAN MOTOR
CCX	COMPRESSION MOTOR CONTACTOR
CM	COMPRESSOR
COMP	COMPRESSOR
COM	COMMUNICATOR
CO	COMMUNICATION
CO2	CO2 SENSING
EOM	ELECTRONICALLY COMMUNICATED MOTOR
ES	ELECTRICAL SHUTDOWN
FB	FIRE BLOCK
FS	FUSE
FSZ	FUSE ZIPPER
FR	FURNACE
GND	EQUIPMENT GROUND

LINE VOLTAGE	WIRE COLOR
208V	W/BRK
230V	W/BRK
460/575V	W/HD
460/575V	W/HD
460/575V	W/BRK
460/575V	W/BRK


WIRE WIRING	FUNCTION
W/BRK	WIRE WITH PINK STRIPE
W/HD	WIRE WITH PINK STRIPE


FACTORY GROUND	FUNCTION
W/GR	WIRE WITH PINK STRIPE
W/GR	WIRE WITH PINK STRIPE

NOTES:
1. ORIGINAL WIRE MUST BE SAME SIZE AND TYPE OF ISOLATION AS ORIGINAL AT LEAST TWO COPIES OF WIRING DIAGRAM MUST BE KEPT ON SITE FOR SERVICE.
2. USE N.E.C. CLASS 2 WIRE FOR ALL VOLTAGE FIELD CONNECTIONS.
3. REFER TO APPROPRIATE WIRING DIAGRAM BOXES AND OTHER INFORMATION FOR INSTALLATION.
4. FOR INSTALLATIONS USING 208V/575V, PHASES MUST BE PRIMARY CONNECTIONS FROM THE 208V TAP.
5. REFER TO TABLE FOR MOTOR WIRING INSTRUCTIONS.
6. FOR HIGHER TORQUE 'Y' AND/OR 'W' WIRES, CAN BE MOVED TO T2 ON THE 208V/575V TAP.
7. FOR HIGHER TORQUE 'Y' AND/OR 'W' WIRES, CAN BE MOVED TO T4-T5 ON THE 208V/575V TAP.
8. FOR 208V/575V WIRING, REFER TO THE BIPOLAR FUSE FROM THE REFRIGERANT LEAK DETECTION UNIT.
9. FOR 208V/575V WIRING, REFER TO THE BIPOLAR FUSE FROM THE REFRIGERANT LEAK DETECTION UNIT.

WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.




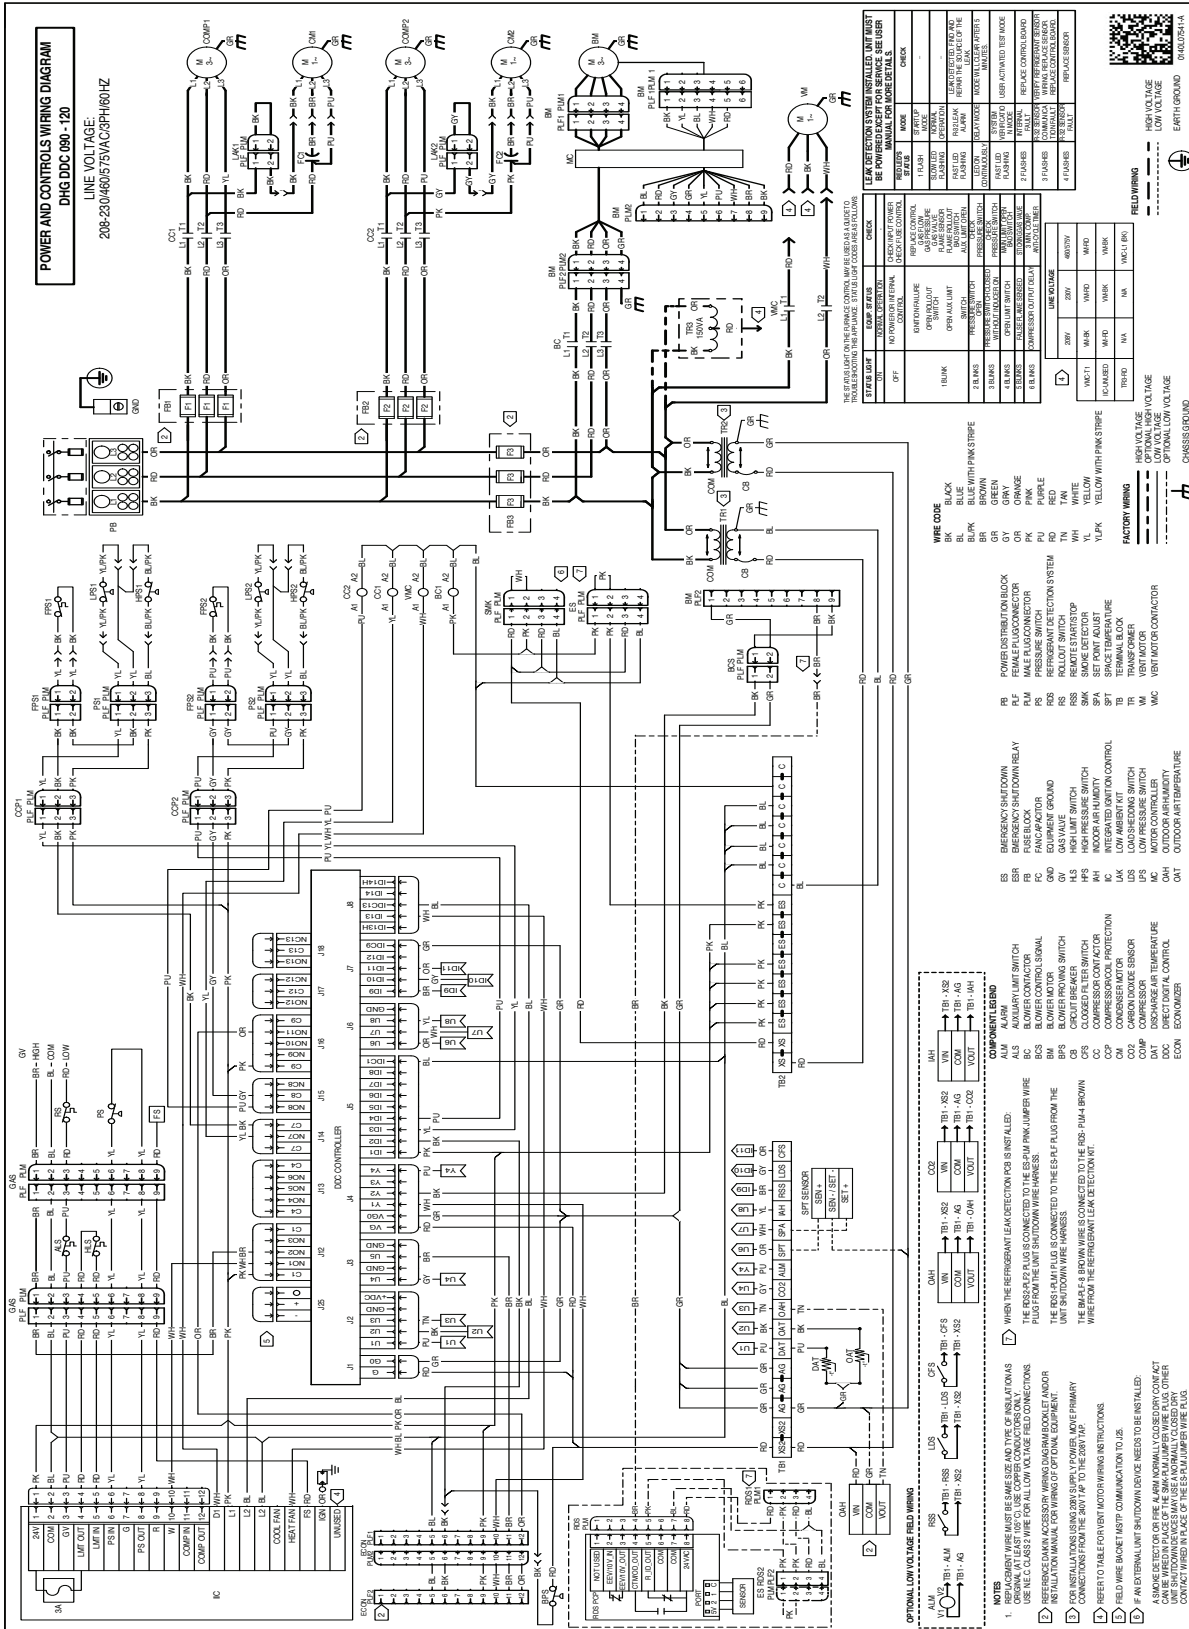


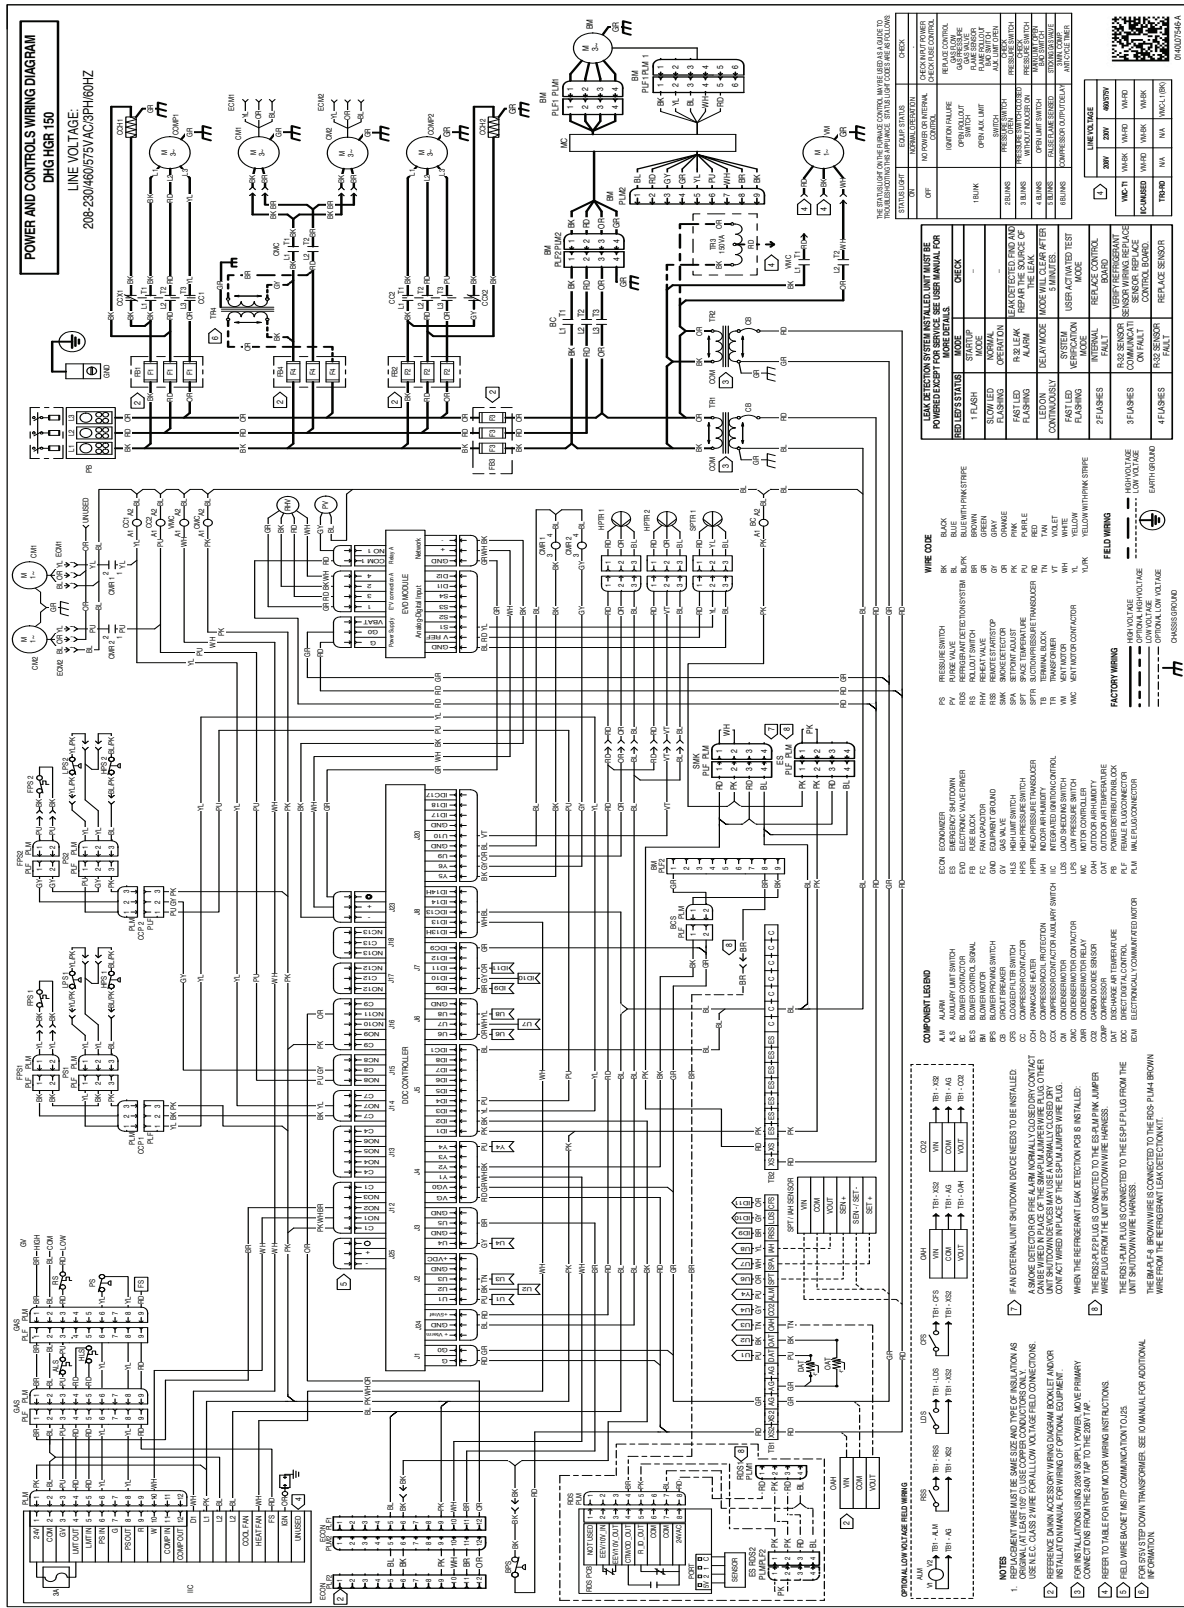

WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.


Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

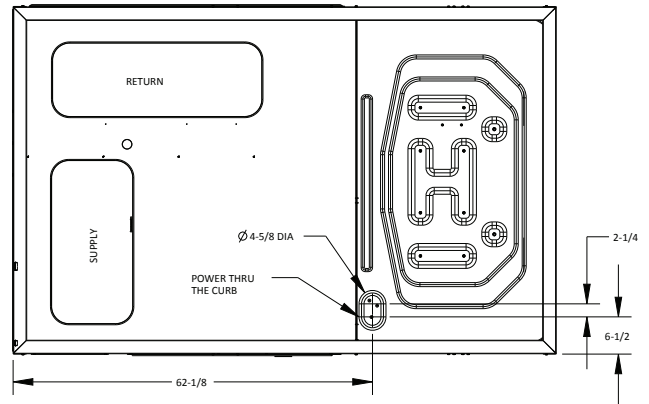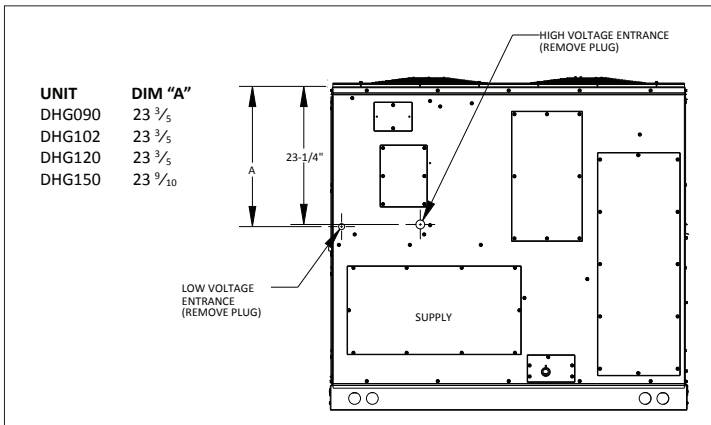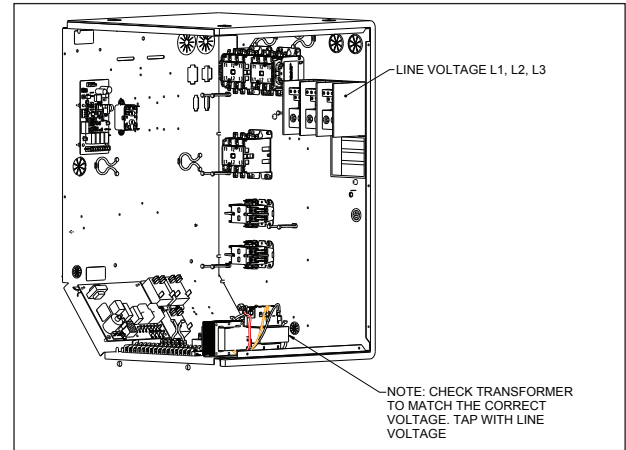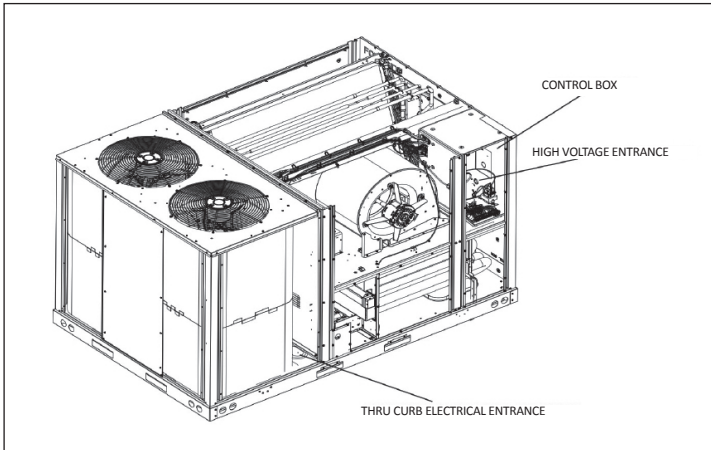

Unit Clearances

Service Clearance

Allow for recommended service clearances as shown in figure to the right. In situations that have multiple units, a 36" minimum clearance is required between the condenser coils. A clearance of 48" is recommended on all sides of the unit to allow service access and to ensure proper ventilation and condenser airflow. The top of the unit should be unobstructed. Provide a roof walkway along the sides of the unit for service and access to controls and components. Contact your Daikin sales representative for service requirements less than those recommended.

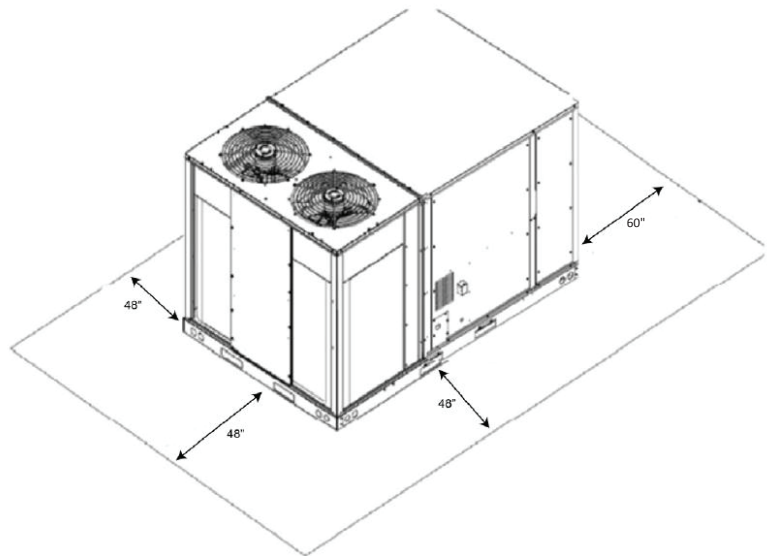

Unit Location


The structural engineer must verify that the roof has adequate support and ability to minimize deflection. Take extreme caution when using on a wooden roof structure. Unit condenser coils should be in a location that avoids any heated exhaust air.

Allow sufficient space around the unit for maintenance/service clearance. Consult your Daikin sales representative if available clearances do not meet minimum recommendations.

Where code considerations, such as the NEC, require extended clearances, these take precedence.

Provisions for forks have been included in the unit base frame. No other fork locations are approved.

- » Unit must be lifted by the four lifting holes located at the base frame corners.
- » Lifting cables should be attached to the unit with shackles.
- » The distance between the crane hook and the top of the unit must not be less than 60".
- » Two spreader bars must span over the unit to prevent damage to the cabinet by the lift cables. Spreader bars must be of sufficient length so that cables do not come in contact with the unit during transport. Remove wood struts mounted beneath unit base

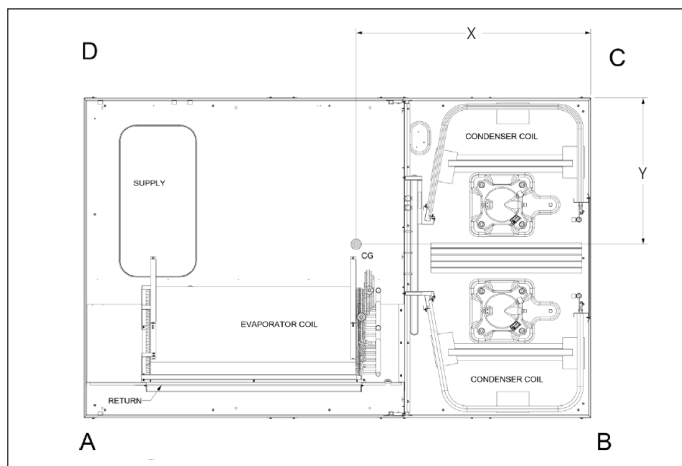

CORNER & CENTER-OF-GRAVITY LOCATIONS

frame before setting unit on roof curb. These struts are intended to protect unit base frame from fork lift damage. To remove the struts, extract the sheet metal retainers and pull the struts through the base of the unit. Refer to rigging label on the unit.

Important: If using bottom discharge with roof curb, ductwork should be attached to the curb prior to installing the unit. Refer to the Roof Curb Installation Instructions for proper curb installation. Curbing must be installed in compliance with the National Roofing Contractors Association Manual. Lower unit carefully onto roof mounting curb. While rigging the unit, the center of gravity will cause the condenser end to be lower than the supply air end. Bring condenser end of unit into alignment with the curb. With condenser end of the unit resting on curb member and using curb as a fulcrum, lower opposite end of the unit until entire unit is seated on the curb. When a rectangular cantilever curb is used, take care to center the unit. Check for proper alignment and orientation of supply and return openings with duct.

Roof Curb Installation

The roof curb is field-assembled and must be installed level (within 1/16" per foot side to side). A sub-base must be constructed by the contractor in applications involving pitched roofs. Gaskets are furnished and must be installed between the unit and curb. For proper installation, follow NRCA guidelines. In applications requiring post and rail installation, an I-beam securely mounted on multiple posts should support the unit on each side. In addition, the insulation on the underside of the unit should be protected from the elements. Applications in geographic areas subjected to seismic or hurricane conditions must meet code requirements for fastening the unit to the curb and the curb to the building structure. For further and more detailed information please refer to our Daikin Light Commercial Packaged unit IOD.

Weights

Model	Shipping Weight (lbs)	Operating Weight (lbs)	Corner Weights (lbs)				Length X (in)	Width Y (in)
			A	B	C	D		
DHG0903D	1319	1253	453	194	121	485	46½	30½
DHG1023D	1327	1268	399	233	206	430	46½	31½ ₁₀
DHG1203D	1353	1296	328	313	302	353	45½	31½ ₇
DHG1503D	1368	1310	304	366	334	306	46½	29½

For details on accessories refer to document **PM-LC-ACCESSORIES**

